

Application Processor Lite *ApP Lite*

TZ1000 Series

Reference Manual

**MCU General-Purpose
Input/Output Controller**

Revision 1.1

2018-02

TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION

Table of Contents

Preface	7
Intended Audience	7
Conventions in this document.....	7
Abbreviation	8
1. Overview	9
2. Block Diagram	10
3. Address Map	11
4. Input and Output Signals.....	15
4.1. Function Signals and GPIO signals	15
5. Function.....	17
5.1. GPIO Operation	17
5.1.1. Reset operation	17
5.1.2. Input and output operations.....	17
5.1.2.1. Data register.....	17
5.1.2.2. Data direction register	19
5.1.3. Interrupt.....	20
5.1.3.1. Register Program	22
5.2. Power Management.....	23
5.3. Start-up and Stop Procedure	24
5.3.1. Start-up procedure.....	24
5.3.2. Stop procedure	27
5.4. Dynamic Clock Gating Setting Procedure	28
6. Precaution for Usage	30
6.1. Access Restriction Associated with Register Access.....	30
7. Details of MCU General-Purpose Input/Output Controller 0 Registers	31
7.1. GPIO0_GPIODATA	31
7.2. GPIO0_GPIODIR	31
7.3. GPIO0_GPIOIS	31
7.4. GPIO0_GPIOIBE	32
7.5. GPIO0_GPIOIEV	32
7.6. GPIO0_GPIOIE	33
7.7. GPIO0_GPIORIS	33
7.8. GPIO0_GPIOIMIS	33
7.9. GPIO0_GPIOIC	34
7.10. GPIO0_GPIOITCR	34
7.11. GPIO0_GPIOITIP1	34
7.12. GPIO0_GPIOITIP2	35
7.13. GPIO0_GPIOITOP1	35
7.14. GPIO0_GPIOITOP2	36
7.15. GPIO0_GPIOITOP3	36

7.16. GPIO0_GPIOPERIPHID0	37
7.17. GPIO0_GPIOPERIPHID1	37
7.18. GPIO0_GPIOPERIPHID2	37
7.19. GPIO0_GPIOPERIPHID3	38
7.20. GPIO0_GPIOPCELLID0	38
7.21. GPIO0_GPIOPCELLID1	38
7.22. GPIO0_GPIOPCELLID2	39
7.23. GPIO0_GPIOPCELLID3	39
8. Details of MCU General-Purpose Input/Output Controller 1 Registers	40
8.1. GPIO1_GPIODATA	40
8.2. GPIO1_GPIODIR	40
8.3. GPIO1_GPIOIS	41
8.4. GPIO1_GPIOIBE	41
8.5. GPIO1_GPIOIEV	41
8.6. GPIO1_GPIOIE	42
8.7. GPIO1_GPIORIS	42
8.8. GPIO1_GPIOMIS	42
8.9. GPIO1_GPIOIC	43
8.10. GPIO1_GPIOITCR	43
8.11. GPIO1_GPIOITIP1	43
8.12. GPIO1_GPIOITIP2	44
8.13. GPIO1_GPIOITOP1	44
8.14. GPIO1_GPIOITOP2	45
8.15. GPIO1_GPIOITOP3	45
8.16. GPIO1_GPIOPERIPHID0	46
8.17. GPIO1_GPIOPERIPHID1	46
8.18. GPIO1_GPIOPERIPHID2	46
8.19. GPIO1_GPIOPERIPHID3	47
8.20. GPIO1_GPIOPCELLID0	47
8.21. GPIO1_GPIOPCELLID1	47
8.22. GPIO1_GPIOPCELLID2	48
8.23. GPIO1_GPIOPCELLID3	48
9. Details of MCU General-Purpose Input/Output Controller 2 Registers	49
9.1. GPIO2_GPIODATA	49
9.2. GPIO2_GPIODIR	49
9.3. GPIO2_GPIOIS	50
9.4. GPIO2_GPIOIBE	50
9.5. GPIO2_GPIOIEV	50
9.6. GPIO2_GPIOIE	51
9.7. GPIO2_GPIORIS	51
9.8. GPIO2_GPIOMIS	51
9.9. GPIO2_GPIOIC	52

9.10. GPIO2_GPIOITCR.....	52
9.11. GPIO2_GPIOITIP1.....	52
9.12. GPIO2_GPIOITIP2	53
9.13. GPIO2_GPIOITOP1.....	53
9.14. GPIO2_GPIOITOP2.....	54
9.15. GPIO2_GPIOITOP3.....	54
9.16. GPIO2_GPIOPERIPHID0	55
9.17. GPIO2_GPIOPERIPHID1	55
9.18. GPIO2_GPIOPERIPHID2	55
9.19. GPIO2_GPIOPERIPHID3	56
9.20. GPIO2_GPIOPCELLID0	56
9.21. GPIO2_GPIOPCELLID1	56
9.22. GPIO2_GPIOPCELLID2	57
9.23. GPIO2_GPIOPCELLID3	57
10. Details of MCU General-Purpose Input/Output Controller 3 Registers	58
10.1. GPIO3_GPIODATA.....	58
10.2. GPIO3_GPIODIR.....	58
10.3. GPIO3_GPIOIS.....	59
10.4. GPIO3_GPIOIBE	59
10.5. GPIO3_GPIOIEV	59
10.6. GPIO3_GPIOIE.....	60
10.7. GPIO3_GPIORIS	60
10.8. GPIO3_GPIOMIS	60
10.9. GPIO3_GPIOIC	61
10.10. GPIO3_GPIOITCR	61
10.11. GPIO3_GPIOITIP1.....	61
10.12. GPIO3_GPIOITIP2	62
10.13. GPIO3_GPIOITOP1.....	62
10.14. GPIO3_GPIOITOP2.....	63
10.15. GPIO3_GPIOITOP3.....	63
10.16. GPIO3_GPIOPERIPHID0	64
10.17. GPIO3_GPIOPERIPHID1	64
10.18. GPIO3_GPIOPERIPHID2	64
10.19. GPIO3_GPIOPERIPHID3	65
10.20. GPIO3_GPIOPCELLID0	65
10.21. GPIO3_GPIOPCELLID1	65
10.22. GPIO3_GPIOPCELLID2	66
10.23. GPIO3_GPIOPCELLID3	66
11. Revision History.....	67
RESTRICTIONS ON PRODUCT USE.....	68

List of Figures

Figure 2.1	GPIO internal block diagram.....	10
Figure 5.1	Example of write of address 0x098 to data 0xFB.....	18
Figure 5.2	Example of read of data 0xFB from address 0xC4	18
Figure 5.3	Write timing of data direction register	19
Figure 5.4	GPIO interrupt registers.....	21
Figure 6.1	Bit allocation of register access	30

List of Tables

Table 3.1	MCU General-Purpose Input/Output Controller 0 Register Map	11
Table 3.2	MCU General-Purpose Input/Output Controller 1 Register Map	12
Table 3.3	MCU General-Purpose Input/Output Controller 2 Register Map	13
Table 3.4	MCU General-Purpose Input/Output Controller 3 Register Map	14
Table 4.1	Correspondence Table	15
Table 4.2	External pin signals (1).....	15
Table 4.3	External pin signals (2).....	16
Table 5.1	Interrupt trigger of pin 2	22
Table 5.2	Power mode and operation	23
Table 11.1	Revision History	67

* Arm, AMBA, Cortex, and Thumb are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. CoreSight is a trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere. All rights reserved.



* All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Preface

This document provides the specification for the MCU General-Purpose Input/Output Controller designed for the TZ1000 Series.

Intended Audience

This document is intended for the following users.

Driver software developers.

System designers

Conventions in this document

- The numerical values are expressed as follows.
 - Hexadecimal number: 0xABCD
 - Decimal number: 123 or 0d123 - Only when it needs to be explicitly shown that they are decimal numbers.
 - Binary number: 0b111 - It is possible to omit the "0b" when the number of bit can be distinctly understood from a sentence.
- "_N" is added to the end of signal names to indicate low active signals.
- It is called "assert" that a signal moves to its active level, "deassert" to its inactive level.
- When two or more signal names are referred, they are described like as [3:0].
 - [3:0] shows four signal names 3, 2, 1, and 0 together.
- The characters surrounded by [] defines the register.
 - Example: **[ABCD]**
- "n" substitutes suffix number of two or more same kind of registers, fields, and bit names.
 - Example: **[XYZ1], [XYZ2], and [XYZ3]** to **[XYZn]**
- The bit range of a register is written like as [3:0].
 - Example: Bit[3:0] expresses the range of bits 3 to 0.
- The configuration value of a register is expressed by either the hexadecimal number or the binary number.
 - Example: **[ABCD].EFG = 0x01** (hexadecimal), **[XYZn].VW = 1** (binary)
- Word and Byte represent the following bit length.
 - Byte: 8-bit
 - Half word: 16-bit
 - Word: 32-bit
 - Double word: 64-bit
- Unless otherwise specified, register access supports only word access.
- The register defined as reserved must not be rewritten. Moreover, don't use the read value.
- Properties of each bit in a register are expressed as follows.
 - R:Read only
 - W: Write only
 - W1C: Write 1 Clear - The corresponding bit is cleared (=0) when "1" is written to this bit.
 - W1S: Write 1 Set - The corresponding bit is set (=1) when "1" is written to this bit.
 - R/W: Read and Write are possible.
 - R/W0C: Read/Write 0 Clear
 - R/W1C: Read/Write 1 Clear
 - R/W1S: Read/Write 1 Set
 - RS/WC: Read Set/Write Clear - Set after read operation, cleared after write operation.
- The value read from the bit having default value of "—" is unknown.
- When a register containing both of writable bits and read-only bits is written, read-only bits should be written with their default value. In the cases that default is "—," follow the definition of each register.
- Reserved bits of the Write-only register should be written with their default value. In the cases that default is "—," follow the definition of each register.

Abbreviation

These specifications introduce a part of the abbreviation which they used

MIS	Masked Interrupt Status
PMU	Power Management Unit

1. Overview

This module consists of general purpose I/O ports.

The main feature is as follows.

- Compliant with the Arm® AMBA® (2.0). The APB slave.
- 4 Channels (GPIO0, GPIO1, GPIO2, GPIO3)
- 8 programmable input and output pins for each channel - The reset state is input as a default.
- The interrupt trigger is selectable for each pin between an edge or a level trigger.
- Bit masking function for read and write using its address line.

2. Block Diagram

The internal block diagram is shown in Figure 2.1.

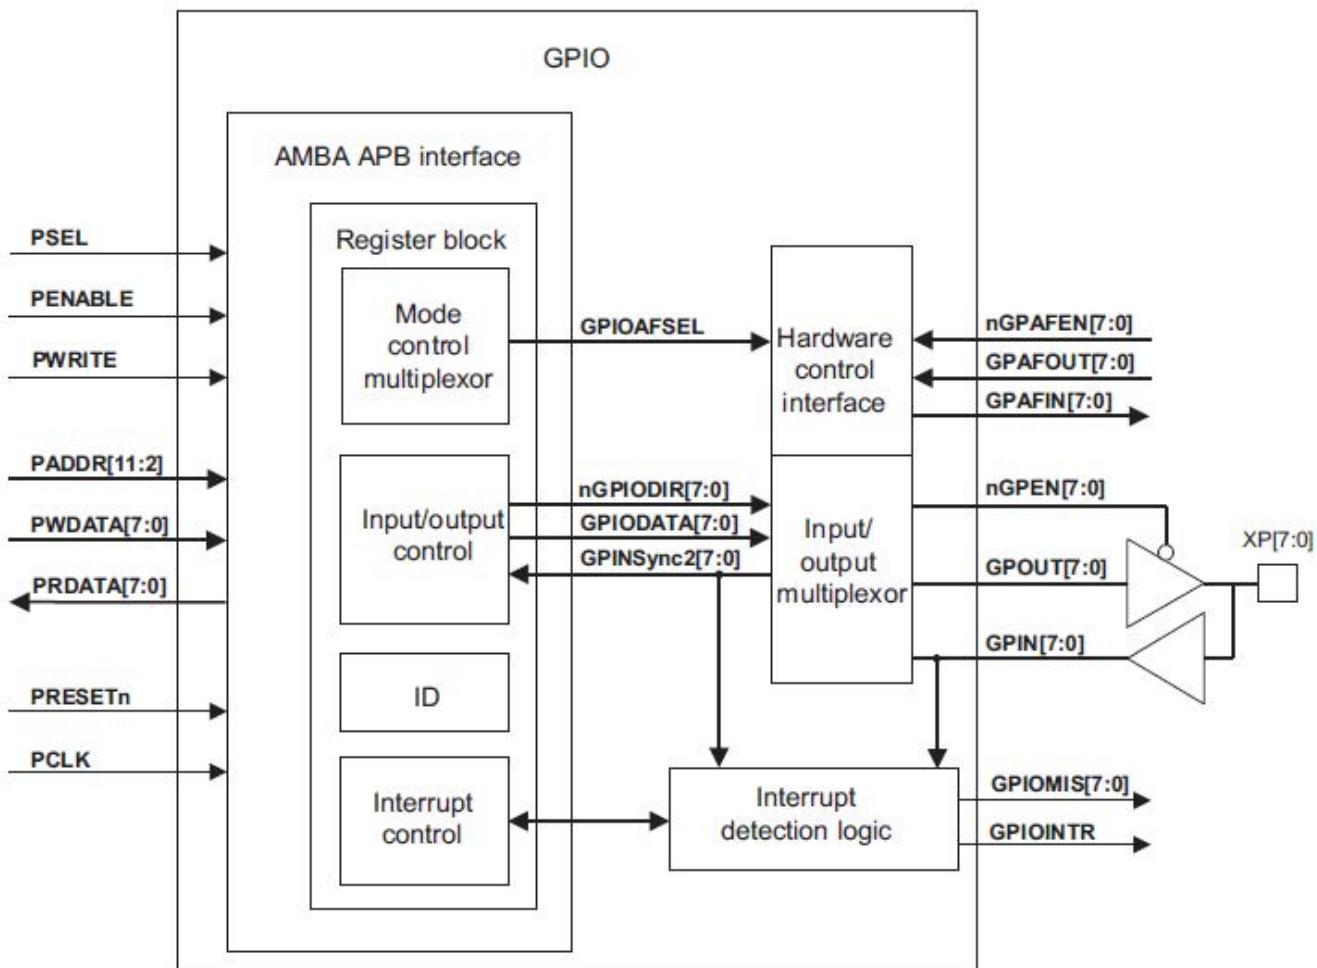


Figure 2.1 GPIO internal block diagram

The outlines of the internal blocks of the GPIO are as follows.

- **AMBA APB interface**
It has the APB slave interface accessed by the CPU. It is used to access registers which are allocated in the 4 KB address space.
- **Interrupt detection logic**
It controls interrupt signals issued from the GPIO pins.
- **Input/output multiplexor**
It is a multiplexor for input or output data through the GPIO pins.
- **Hardware control interface**
It controls the input or output signals through the GPIO pins. It is not used by the TZ1000 Series.

3. Address Map

Table 3.1 MCU General-Purpose Input/Output Controller 0 Register Map

Register Name	Type	Width	Reset Value	Address Offset
GPIO0_GPIODATA	RW	32	0x0000 0000	0x0000 0000-
GPIO0_GPIODIR	RW	32	0x0000 0000	0x0000 0400
GPIO0_GPIOIS	RW	32	0x0000 0000	0x0000 0404
GPIO0_GPIOIBE	RW	32	0x0000 0000	0x0000 0408
GPIO0_GPIOIEV	RW	32	0x0000 0000	0x0000 040C
GPIO0_GPIOIE	RW	32	0x0000 0000	0x0000 0410
GPIO0_GPIORIS	RO	32	0x0000 0000	0x0000 0414
GPIO0_GPIOMIS	RO	32	0x0000 0000	0x0000 0418
GPIO0_GPIOIC	RW	32	0x0000 0000	0x0000 041C
GPIO0_GPIOITCR	RW	32	0x0000 0000	0x0000 0600
GPIO0_GPIOITIP1	RW	32	0x0000 0000	0x0000 0604
GPIO0_GPIOITIP2	RW	32	0x0000 0000	0x0000 0608
GPIO0_GPIOITOP1	RW	32	0x0000 0000	0x0000 060C
GPIO0_GPIOITOP2	RO	32	0x0000 0000	0x0000 0610
GPIO0_GPIOITOP3	RW	32	0x0000 0000	0x0000 0614
GPIO0_GPIOPERIPHID0	RO	32	0x0000 0061	0x0000 OFE0
GPIO0_GPIOPERIPHID1	RO	32	0x0000 0010	0x0000 OFE4
GPIO0_GPIOPERIPHID2	RO	32	0x0000 0004	0x0000 OFE8
GPIO0_GPIOPERIPHID3	RO	32	0x0000 0000	0x0000 OFEC
GPIO0_GPIOPCELLID0	RO	32	0x0000 000D	0x0000 OFF0
GPIO0_GPIOPCELLID1	RO	32	0x0000 00F0	0x0000 OFF4
GPIO0_GPIOPCELLID2	RO	32	0x0000 0005	0x0000 OFF8
GPIO0_GPIOPCELLID3	RO	32	0x0000 00B1	0x0000 OFFC

Table 3.2 MCU General-Purpose Input/Output Controller 1 Register Map

Register Name	Type	Width	Reset Value	Address Offset
GPIO1_GPIODATA	RW	32	0x0000 0000	0x0000 0000-
GPIO1_GPIODIR	RW	32	0x0000 0000	0x0000 0400
GPIO1_GPIOIS	RW	32	0x0000 0000	0x0000 0404
GPIO1_GPIOIBE	RW	32	0x0000 0000	0x0000 0408
GPIO1_GPIOIEV	RW	32	0x0000 0000	0x0000 040C
GPIO1_GPIOIE	RW	32	0x0000 0000	0x0000 0410
GPIO1_GPIORIS	RO	32	0x0000 0000	0x0000 0414
GPIO1_GPIOIMIS	RO	32	0x0000 0000	0x0000 0418
GPIO1_GPIOIC	RW	32	0x0000 0000	0x0000 041C
GPIO1_GPIOITCR	RW	32	0x0000 0000	0x0000 0600
GPIO1_GPIOITIP1	RW	32	0x0000 0000	0x0000 0604
GPIO1_GPIOITIP2	RW	32	0x0000 0000	0x0000 0608
GPIO1_GPIOITOP1	RW	32	0x0000 0000	0x0000 060C
GPIO1_GPIOITOP2	RO	32	0x0000 0000	0x0000 0610
GPIO1_GPIOITOP3	RW	32	0x0000 0000	0x0000 0614
GPIO1_GPIOPERIPHID0	RO	32	0x0000 0061	0x0000 0FE0
GPIO1_GPIOPERIPHID1	RO	32	0x0000 0010	0x0000 0FE4
GPIO1_GPIOPERIPHID2	RO	32	0x0000 0004	0x0000 0FE8
GPIO1_GPIOPERIPHID3	RO	32	0x0000 0000	0x0000 0FEC
GPIO1_GPIOPCCELLID0	RO	32	0x0000 000D	0x0000 OFF0
GPIO1_GPIOPCCELLID1	RO	32	0x0000 00F0	0x0000 OFF4
GPIO1_GPIOPCCELLID2	RO	32	0x0000 0005	0x0000 OFF8
GPIO1_GPIOPCCELLID3	RO	32	0x0000 00B1	0x0000 OFFC

Table 3.3 MCU General-Purpose Input/Output Controller 2 Register Map

Register Name	Type	Width	Reset Value	Address Offset
GPIO2_GPIODATA	RW	32	0x0000 0000	0x0000 0000-
GPIO2_GPIODIR	RW	32	0x0000 0000	0x0000 0400
GPIO2_GPIOIS	RW	32	0x0000 0000	0x0000 0404
GPIO2_GPIOIBE	RW	32	0x0000 0000	0x0000 0408
GPIO2_GPIOIEV	RW	32	0x0000 0000	0x0000 040C
GPIO2_GPIOIE	RW	32	0x0000 0000	0x0000 0410
GPIO2_GPIORIS	RO	32	0x0000 0000	0x0000 0414
GPIO2_GPIOMIS	RO	32	0x0000 0000	0x0000 0418
GPIO2_GPIOIC	RW	32	0x0000 0000	0x0000 041C
GPIO2_GPIOITCR	RW	32	0x0000 0000	0x0000 0600
GPIO2_GPIOITIP1	RW	32	0x0000 0000	0x0000 0604
GPIO2_GPIOITIP2	RW	32	0x0000 0000	0x0000 0608
GPIO2_GPIOITOP1	RW	32	0x0000 0000	0x0000 060C
GPIO2_GPIOITOP2	RO	32	0x0000 0000	0x0000 0610
GPIO2_GPIOITOP3	RW	32	0x0000 0000	0x0000 0614
GPIO2_GPIOPERIPHID0	RO	32	0x0000 0061	0x0000 0FE0
GPIO2_GPIOPERIPHID1	RO	32	0x0000 0010	0x0000 0FE4
GPIO2_GPIOPERIPHID2	RO	32	0x0000 0004	0x0000 0FE8
GPIO2_GPIOPERIPHID3	RO	32	0x0000 0000	0x0000 0FEC
GPIO2_GPIOPCCELLID0	RO	32	0x0000 000D	0x0000 OFF0
GPIO2_GPIOPCCELLID1	RO	32	0x0000 00F0	0x0000 OFF4
GPIO2_GPIOPCCELLID2	RO	32	0x0000 0005	0x0000 OFF8
GPIO2_GPIOPCCELLID3	RO	32	0x0000 00B1	0x0000 OFFC

Table 3.4 MCU General-Purpose Input/Output Controller 3 Register Map

Register Name	Type	Width	Reset Value	Address Offset
GPIO3_GPIODATA	RW	32	0x0000 0000	0x0000 0000-
GPIO3_GPIODIR	RW	32	0x0000 0000	0x0000 0400
GPIO3_GPIOIS	RW	32	0x0000 0000	0x0000 0404
GPIO3_GPIOIBE	RW	32	0x0000 0000	0x0000 0408
GPIO3_GPIOIEV	RW	32	0x0000 0000	0x0000 040C
GPIO3_GPIOIE	RW	32	0x0000 0000	0x0000 0410
GPIO3_GPIORIS	RO	32	0x0000 0000	0x0000 0414
GPIO3_GPIOVIS	RO	32	0x0000 0000	0x0000 0418
GPIO3_GPIOIC	RW	32	0x0000 0000	0x0000 041C
GPIO3_GPIOITCR	RW	32	0x0000 0000	0x0000 0600
GPIO3_GPIOITIP1	RW	32	0x0000 0000	0x0000 0604
GPIO3_GPIOITIP2	RW	32	0x0000 0000	0x0000 0608
GPIO3_GPIOITOP1	RW	32	0x0000 0000	0x0000 060C
GPIO3_GPIOITOP2	RO	32	0x0000 0000	0x0000 0610
GPIO3_GPIOITOP3	RW	32	0x0000 0000	0x0000 0614
GPIO3_GPIOPERIPHID0	RO	32	0x0000 0061	0x0000 0FE0
GPIO3_GPIOPERIPHID1	RO	32	0x0000 0010	0x0000 0FE4
GPIO3_GPIOPERIPHID2	RO	32	0x0000 0004	0x0000 0FE8
GPIO3_GPIOPERIPHID3	RO	32	0x0000 0000	0x0000 0FEC
GPIO3_GPIOPCCELLID0	RO	32	0x0000 000D	0x0000 OFF0
GPIO3_GPIOPCCELLID1	RO	32	0x0000 00F0	0x0000 OFF4
GPIO3_GPIOPCCELLID2	RO	32	0x0000 0005	0x0000 OFF8
GPIO3_GPIOPCCELLID3	RO	32	0x0000 00B1	0x0000 OFFC

4. Input and Output Signals

4.1. Function Signals and GPIO signals

The correspondence between the function signals and the GPIO signals is shown in Table 4.1.

The function signals are described in the section "5. Function".

Table 4.1 Correspondence Table

function signal name	GPIO signals	Description
PCLK	PCLK	bus clock
PRESETn	PRESETn	reset
PADDR	PADDR	APB signals
PENABLE	PENABLE	
PSEL	PSEL	
PWDATA	PWDATA	
PWRITE	PWRITE	
PRDATA	PRDATA	
GPIN	GPIN	GPIO Input
GPOUT	GPOUT	GPIO Output
nGPEN	nGPEN	GPIO direction control
nGPAFEN	nGPAFEN	not used
GPAFOUT	GPAFOUT	
GPAFIN	GPAFIN	
GIOMIS	GIOMIS	GPIO Interrupt
GIOINTR	GIOINTR	GPIO Interrupt (combined)

The connection to external pins is shown in Table 4.2.

The function of each GPIO pin can be changed by the pin share setting.

Table 4.2 External pin signals (1)

PIN name	direction	connect	Pin share	internal_connection signals (Block: signals)
MCU_GPIO_0	input	PIN	FMOD1	GPIO0: GPIN[0]
MCU_GPIO_1	In/out	PIN	FMOD1	GPIO0: GPIN[1]/GPOUT[1]/nGPEN[1]
MCU_GPIO_2	In/out	PIN	FMOD1	GPIO0: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_GPIO_3	In/out	PIN	FMOD1	GPIO0: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_GPIO_4	In/out	PIN	FMOD1	GPIO0: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_GPIO_5	In/out	PIN	FMOD1	GPIO0: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_GPIO_6	In/out	PIN	FMOD1	GPIO0: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_GPIO_7	In/out	PIN	FMOD1	GPIO0: GPIN[7]/GPOUT[7]/nGPEN[7]

Table 4.3 External pin signals (2)

PIN name	direction	connect	Pin share	internal_connection signals (Block: signals)
MCU_GPIO_8	In/out	PIN	FMOD1	GPIO1: GPIN[0]/GPOUT[0]/nGPEN[0]
MCU_GPIO_9	In/out	PIN	FMOD1	GPIO1: GPIN[1]/GPOUT[1]/nGPEN[1]
MCU_GPIO_10	In/out	PIN	FMOD1	GPIO1: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_GPIO_11	In/out	PIN	FMOD1	GPIO1: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_GPIO_12	In/out	PIN	FMOD1	GPIO1: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_GPIO_13	In/out	PIN	FMOD1	GPIO1: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_GPIO_14	In/out	PIN	FMOD1	GPIO1: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_GPIO_15	In/out	PIN	FMOD1	GPIO1: GPIN[7]/GPOUT[7]/nGPEN[7]
MCU_GPIO_24	In/out	PIN	FMOD1	GPIO3: GPIN[0]/GPOUT[0]/nGPEN[0]
MCU_GPIO_25	In/out	PIN	FMOD1	GPIO3: GPIN[1]/GPOUT[1]/nGPEN[1]
MCU_GPIO_26	In/out	PIN	FMOD1	GPIO3: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_GPIO_27	In/out	PIN	FMOD1	GPIO3: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_GPIO_28	In/out	PIN	FMOD1	GPIO3: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_GPIO_29	In/out	PIN	FMOD1	GPIO3: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_GPIO_30	In/out	PIN	FMOD1	GPIO3: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_GPIO_31	In/out	PIN	FMOD1	GPIO3: GPIN[7]/GPOUT[7]/nGPEN[7]
MCU_SPIM0_CS_N	In/out	PIN	FMOD2	GPIO2: GPIN[0]/GPOUT[0]/nGPEN[0]
MCU_SPIM0_CLK	In/out	PIN	FMOD2	GPIO2: GPIN[1]/GPOUT[1]/nGPEN[1]
MCU_SPIM0_MOSI	In/out	PIN	FMOD2	GPIO2: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_SPIM0_MISO	In/out	PIN	FMOD2	GPIO2: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_SPIM1_CS_N	In/out	PIN	FMOD2	GPIO2: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_SPIM1_CLK	In/out	PIN	FMOD2	GPIO2: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_SPIM1_MOSI	In/out	PIN	FMOD2	GPIO2: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_SPIM1_MISO	In/out	PIN	FMOD2	GPIO2: GPIN[7]/GPOUT[7]/nGPEN[7]
MCU_ADC24_SYNC	In/out	PIN	FMOD3	GPIO1: GPIN[0]/GPOUT[0]/nGPEN[0]
MCU_UA2_RTS_N	In/out	PIN	FMOD3	GPIO1: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_UA2_CTS_N	In/out	PIN	FMOD3	GPIO1: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_UA1_RXD	In/out	PIN	FMOD3	GPIO1: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_UA1_TXD	In/out	PIN	FMOD3	GPIO1: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_I2C1_DATA	In/out	PIN	FMOD3	GPIO1: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_I2C1_CLK	In/out	PIN	FMOD3	GPIO1: GPIN[7]/GPOUT[7]/nGPEN[7]
MCU_I2C0_DATA	In/out	PIN	FMOD3	GPIO2: GPIN[0]/GPOUT[0]/nGPEN[0]
MCU_I2C0_CLK	In/out	PIN	FMOD3	GPIO2: GPIN[1]/GPOUT[1]/nGPEN[1]
MCU_UA2_RXD	In/out	PIN	FMOD3	GPIO2: GPIN[2]/GPOUT[2]/nGPEN[2]
MCU_UA2_TXD	In/out	PIN	FMOD3	GPIO2: GPIN[3]/GPOUT[3]/nGPEN[3]
MCU_UA0_RXD	In/out	PIN	FMOD3	GPIO2: GPIN[4]/GPOUT[4]/nGPEN[4]
MCU_UA0_TXD	In/out	PIN	FMOD3	GPIO2: GPIN[5]/GPOUT[5]/nGPEN[5]
MCU_UA1_RTS_N	In/out	PIN	FMOD3	GPIO2: GPIN[6]/GPOUT[6]/nGPEN[6]
MCU_UA1_CTS_N	In/out	PIN	FMOD3	GPIO2: GPIN[7]/GPOUT[7]/nGPEN[7]

5. Function

The description in this section uses the function signal names. For the correspondence between the function signals and the GPIO signals, refer to Table 3.1.

5.1. GPIO Operation

5.1.1. Reset operation

PRESETn is driven to LOW.

- The interrupt of the specified pin is disabled by the clear of the corresponding bit in the *[GPIO_n_GPIOIE]* register.
- All registers are cleared to 0.
- Input and output pins are set to input pins.
- All external interrupts are masked to be disabled.
- Interrupt causes are cleared.
- Edge trigger interrupt is selected.

Recommendation

When an interrupt is set to be generated with the edge trigger, the following initialization sequence should be done so that the system does not recognize a wrong interrupt.

- Set the *[GPIO_n_GPIOIBE]* register properly to the edge trigger type among a rising edge, a falling edge, and both edges.
- When either a rising edge or a falling edge is selected, the *[GPIO_n_GPIOIEV]* register should be set.
- Set the *[GPIO_n_GPIOIS]* register to selecting an edge trigger path.
- Wait 3 clock cycles to clear the interrupt pipeline.
- During these operations, **GPIN[7:0]** bus should be stable.
- Write FF to the *[GPIO_n_GPIOIC]* register to clear all interrupts.
- Set the *[GPIO_n_GPIOIE]* register so that the interrupt is enabled.

5.1.2. Input and output operations

The GPIO module consists of 8 programmable input and output pins. When the software control mode is enabled, the data and the data direction of these pins are controlled by a data register and a data direction register, respectively. When reading the data register, each read data has the status of either the input or the output of the corresponding GPIO pin. The write data to the data register are valid only to the pins which are set to the output.

5.1.2.1. Data register

When software driver sets a bit of the GPIO without disturbing the other bits at a data write to the data register, the address bus is used as the mask of the read or write operation. The data register occupies 256 word addresses in the address space. 8 address signals **PADDR[9:2]** are used to access the data register. At a write to the data register, if the address bit corresponding to the data bit is HIGH, the *[GPIO_n_GPIOADATA]* register value is changed. If the address bit is LOW, the register value is not changed.


Example:

[GPIO_n_GPIOADATA] + address 0x098 (= 0b000010011000) write

When the register whose address is **PADDR[9:2] = 0b00100110** (the address 0x098) is written to 0xFB, the followings occur.

- The bit 5 and bit 1 of the GPIO pin are set to 1. The bit 2 of that is set to 0.
- The other bits are unchanged.

Figure 5.1 shows how the address value 0x098 affects the data value 0xFB.

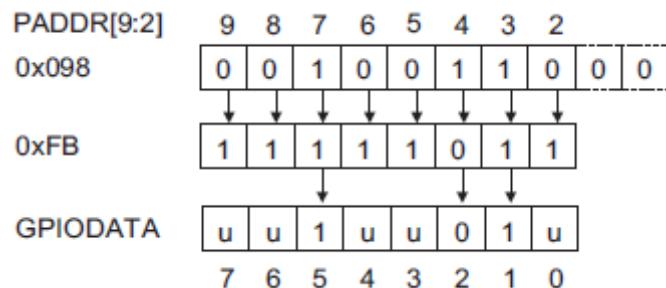

Note: "u" indicates that the bit value is unchanged.

Figure 5.1 Example of write of address 0x098 to data 0xFB

At a read from GPIO pins, if the address bit corresponding to the data bit is HIGH, the pin value is read. If the address bit is LOW, the read value becomes 0.

Example:

[GPIO_n_GPIO DATA] + address 0x0C4 (= 0b000011000100)

When the pins whose address is **PADDR[9:2]** = 0b00110001 (address 0x0C4) is read, the followings occur.

- Bits 5, 4, and 0 of the GPIO pins are read.
- Bits 7, 6, 3, 2, and 1 become 0.

Figure 5.2 shows the read from the address 0x0C4 and the PRDATA[7:0] values.

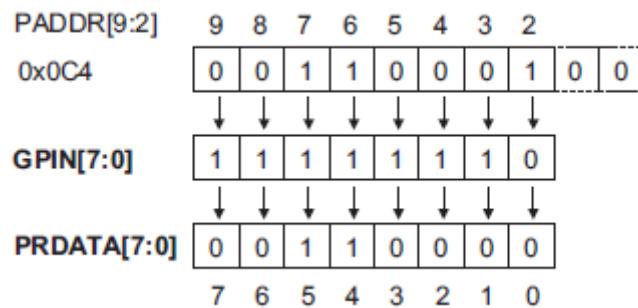


Figure 5.2 Example of read of data 0xFB from address 0x0C4

5.1.2.2. Data direction register

The operation of the data direction register is as follows.

- 0 defines that the corresponding pin is the input.
- 1 defines that the corresponding pin is the output.

The typical write timing is shown in Figure 5.3.

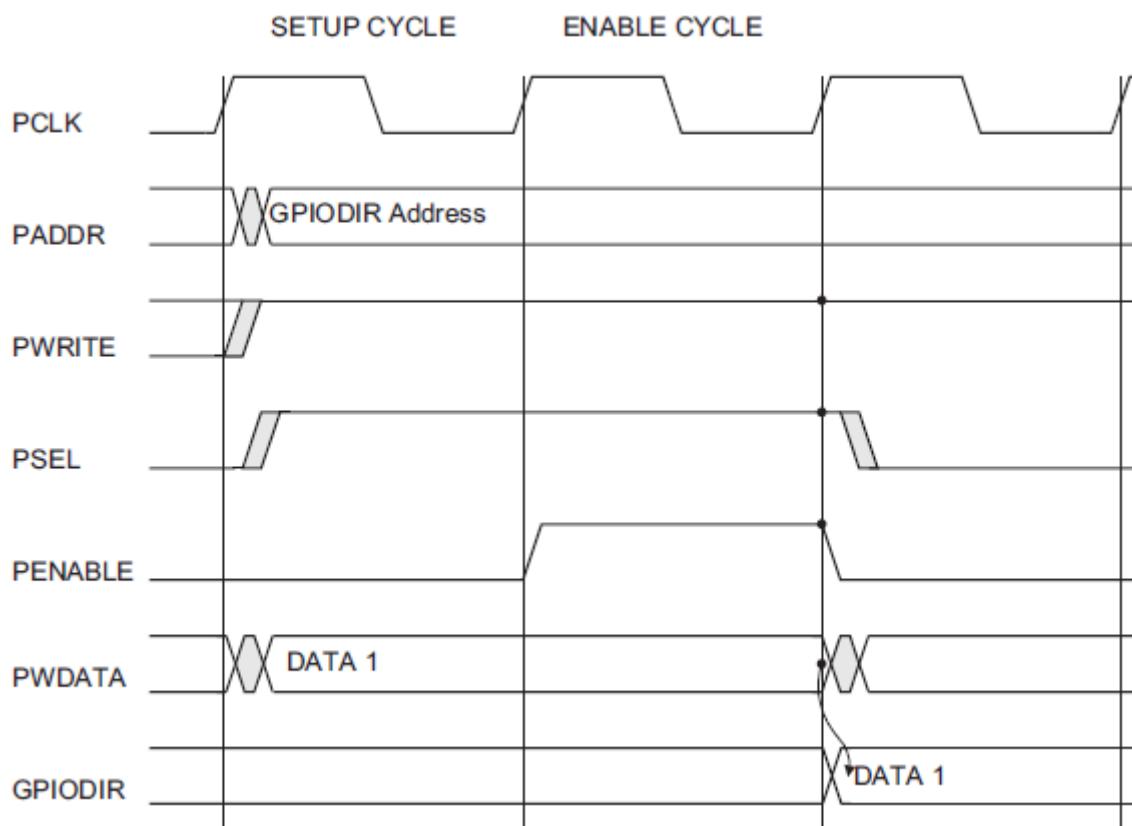


Figure 5.3 Write timing of data direction register

5.1.3. Interrupt

The interrupt operation of the GPIO is controlled by 7 registers. The source of an interrupt, the input polarity, and the edge property can be selected. When one or more GPIO pins generate interrupts, either a single **GPIOINTR** or the GPIO interrupts are transferred to the interrupt controller. If an edge trigger interrupt is set, software should clear it to enable another interrupt. In the level trigger interrupt, the external source has the level information which the processor recognizes as an interrupt.

The following 3 registers are necessary to define the source of an interrupt to either an edge or a level trigger.

- *[GPIO_n_GPIOIS]*
- *[GPIO_n_GPIOIBE]*
- *[GPIO_n_GPIOIEV]*

Figure 5.4 shows the flowchart to select a source trigger of an interrupt using the 3 registers.

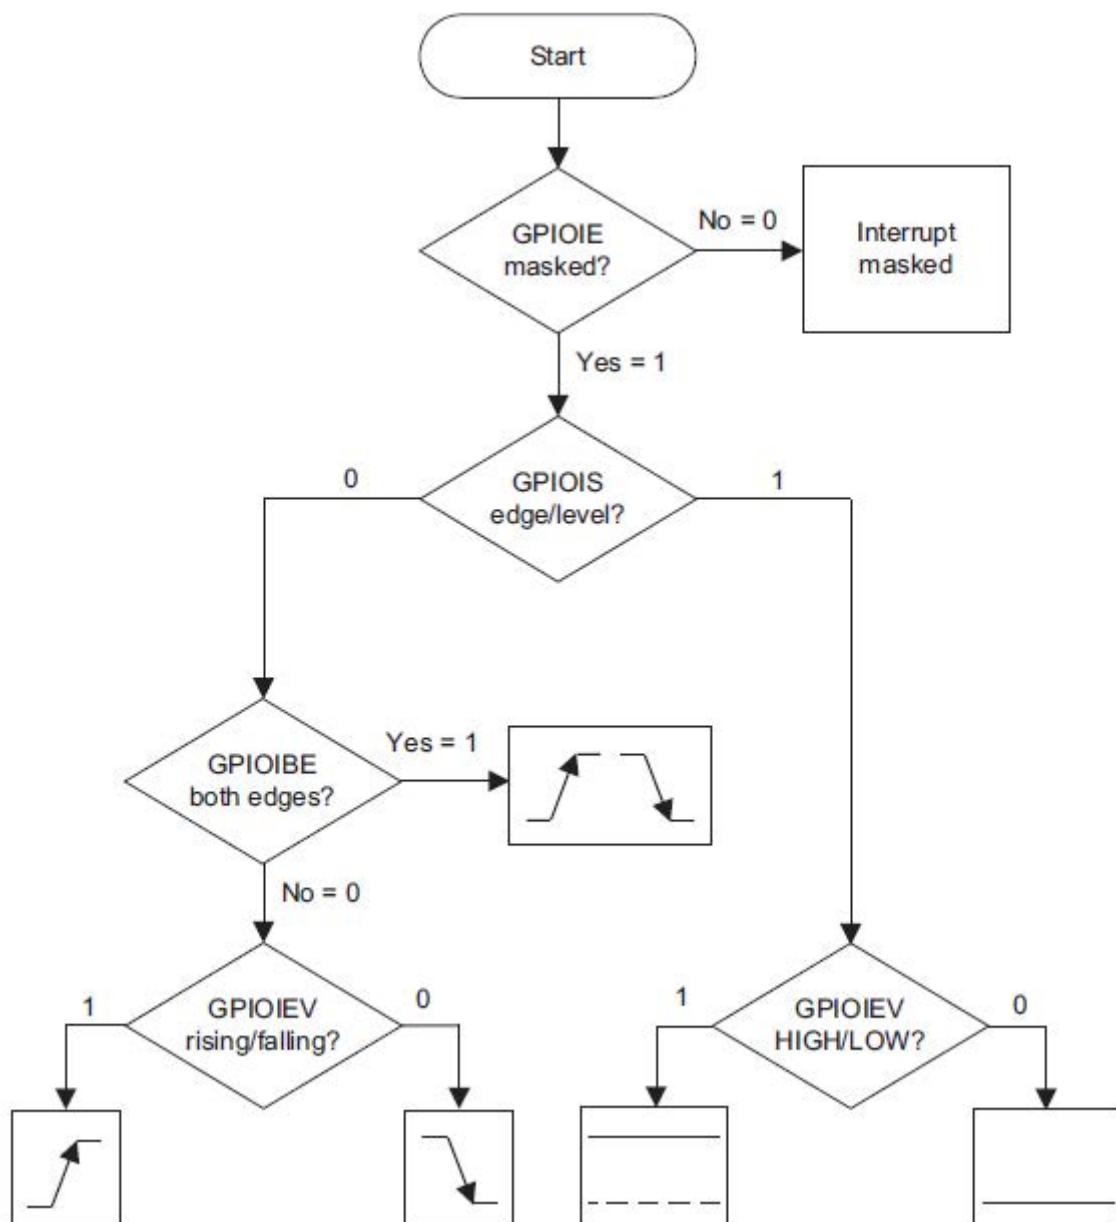


Figure 5.4 GPIO interrupt registers

5.1.3.1. Register Program

Table 5.1 Interrupt trigger of pin 2 shows the setting of the rising edge trigger for the interrupt of the bit 2 of the input pin.

Table 5.1 Interrupt trigger of pin 2

Register	Desired trigger	7	6	5	4	3	2	1	0
GPIOIS	0 = edge 1 = level	x	x	x	x	x	0	x	x
GPIOIBE	0 = single edge 1 = both edges	x	x	x	x	x	0	x	x
GPIOIEV	LOW level, or negative edge HIGH level, or positive edge	x	x	x	x	x	1	x	x
GPIOIE	0 = masked 1 = not masked	0	0	0	0	0	1	0	0

The data 0 in any bit of the *[GPIO_n_GPIOIE]* register disables the trigger of the corresponding interrupt.

In Table 5.1, x means that the data has no relations with the bit 2 and is masked by the *[GPIO_n_GPIOIE]* register. When an interrupt is not enabled, the interrupt control register should be set. When the interrupt control register is written, an interrupt can be generated if the corresponding bit is enables.

5.2. Power Management

The power modes of the TZ1000 Series are shown in Table 5.2.

Table 5.2 Power mode and operation

Power mode	State of GPIO0/1/2/3
ACTIVE	Run (*1)
SLEEP0	Run (*1)
SLEEP1	Run (*1)
SLEEP2	Clock gating
WAIT	Clock gating
RETENTION	Retention
RTC	Power Down
STOP	Power Down

(*1) The clock can be started or stopped by software.

- ACTIVE/SLEEP0/SLEEP1:

Normal operation.

When the clock stop is set by software, the input or output operation and the edge trigger interrupt operation stop, and every signal holds its own data. So, if an interrupt is asserted, it cannot be deasserted because of no clock operation. To prevent that, the clock should be stopped after the interrupt disable (*[GPIO_n_GPIOIE].IE[m]* = 0) is set for PIN m of edge interrupt setting.

GPIO register	Bit name	value	Condition
<i>[GPIO_n_GPIOIE]</i>	IE[m]	0b0	<i>[GPIO_n_GPIOIS].IS[m]==0b0</i>

(n is a channel number: 0, 1, 2, or 3.)

(m is a PIN number: 0, 1, 2, 3, 4, 5, 6, or 7.)

When the clock start is set, the transfer re-starts with the same state where the clock stopped. For the level trigger interrupt, the interrupt request reaches the CPU and the interrupt can be generated.

- SLEEP2/WAIT/ RETENTION:

PCLK stops, so the input or output operation and the edge trigger interrupt operation cannot be used. The PMU can, however, receive an interrupt because the GPIO is controlled by the PMU. If the interrupt is asserted, it will not be able to be deasserted. It is necessary to set the disable to them (*[GPIO_n_GPIOIE].IE* = 0x00) before the clock stop.

GPIO register	Bit name	value	Condition
<i>[GPIO_n_GPIOIE]</i>	IE	0x00	—

(n is a channel number: 0, 1, 2, or 3.)

When returning from this mode, every signal is restored to the data in the previous mode.

- RTC/STOP:

Before the transition to this mode, it should be checked that the following settings are done to disable the corresponding function.

- All IE bits in the *[GPIO_n_GPIOIE]* register are 0.
- The return procedure is set in an appropriate register in the PMU.
(n is a channel number: 0, 1, 2, or 3.)

When returning from this mode, the registers are initialized. So, the operation should re-start after the configuration of the registers completes.

5.3. Start-up and Stop Procedure

5.3.1. Start-up procedure

The start-up procedure after power-on is as follows.

For detail of the PMU (Power Management Unit) registers, refer to the PMU section.

The following settings are supposed that the main bus (the bus connected to the CPU) and the GCONF are supplied with clocks.

Each GPIO will be supplied with a clock by this setting.

("**" shows the signal which also controls another function. The setting should be done together with another setting.)

The order of the setting procedure is a frequency setting at first, then clock supply, and reset deassertion at last.

- GPIO clock frequency setting

PMU register	Bit name	Description
[CSM_MAIN]	CSMSEL_MAIN	0x0000000u u: 0x0: SiOSC4M, 0x1: OSC12M, 0x2: PLL, 0x3: ADPLL, 0x4: OSC32K/SIOSC32K 0x5-0x7: reserved
[PRESCAL_MAIN]	PSSEL_CD_PPIER0	0x****u*** u: 0x0: not generate clock 0x1: divided by 1, 0x2: divided by 2, 0x3: divided by 3, 0x4: divided by 4, 0x5: divided by 5, 0x6: divided by 6, 0x7: divided by 7, 0x8: divided by 8, 0x9: divided by 9, 0xA: divided by 10, 0xB: divided by 12, 0xC: divided by 18, 0xD: divided by 24, 0xE: divided by 36, 0xF: divided by 48

Note: [CSM_MAIN] sets the source of the clock. The PLL is set by another register and the frequency is changed by the setting. (For detail, refer to the PMU section.)

Note: [PRESCAL_MAIN] has a setting to another power domain.

Note: PSSEL_CD_PPIER0 setting specifies all circuits in the PPIER0 power domain.

The start-up sequence of the GPIO0 is as follows.

Setting of the external shared pins at first, then release of the standby for the external pins, Clock supply, and deassertion of the reset at last.

- Setting of the external shared pins of the GPIO0
It is necessary that the GCONF should configure the shared pins to input or output data. (For detail, refer to the GCONF section.)
- Standby mode release of the external pins in the GPIO0
When the external pins are used, it is necessary to release the standby mode of the pins. (For detail, refer to the PMU section.)

- GPIO0 clock supply

PMU register	Bit name	value
<i>[CG_OFF_POWERDOMAIN]</i>	CG_PM	0x00000001
<i>[CG_OFF_PM_2]</i>	CG_ppier0clk_gpio0_pclk	0x00000010

Note: Bit 4 in the *[CG_OFF_PM_2]* register corresponds to the GPIO0.

- Reset deassertion of the GPIO0

PMU register	Bit name	value
<i>[SRST_OFF_POWERDOMAIN]</i>	SRST_PM	0x00000001
<i>[SRST_OFF_PM_2]</i>	SRST_asyncrst_gpio0_prstn	0x00000010

Note: Bit 4 in the *[SRST_OFF_PM_2]* register corresponds to the GPIO0.

The start-up sequence of the GPIO1 is as follows.

Setting of the external shared pins at first, then release of the standby for the external pins, Clock supply, and deassertion of the reset at last.

- Setting of the external shared pins of the GPIO1

It is necessary that the GCONF should configure the shared pins to input or output data. (For detail, refer to the GCONF section.)

- Standby mode release of the external pins in the GPIO1

When the external pins are used, it is necessary to release the standby mode of the pins. (For detail, refer to the PMU section.)

- GPIO1 clock supply

PMU register	Bit name	value
<i>[CG_OFF_POWERDOMAIN]</i>	CG_PM	0x00000001
<i>[CG_OFF_PM_2]</i>	CG_ppier0clk_gpio1_pclk	0x00000020

Note: Bit 5 in the *[CG_OFF_PM_2]* register corresponds to the GPIO1.

- Reset deassertion of the GPIO1

PMU register	Bit name	value
<i>[SRST_OFF_POWERDOMAIN]</i>	SRST_PM	0x00000001
<i>[SRST_OFF_PM_2]</i>	SRST_asyncrst_gpio1_prstn	0x00000020

Note: Bit 5 in the *[SRST_OFF_PM_2]* register corresponds to the GPIO1.

The start-up sequence of the GPIO2 is as follows.

Setting of the external shared pins at first, then release of the standby for the external pins, Clock supply, and deassertion of the reset at last.

- Setting of the external shared pins of the GPIO2

It is necessary that the GCONF should configure the shared pins to input or output data. (For detail, refer to the GCONF section.)

- Standby mode release of the external pins in the GPIO2
When the external pins are used, it is necessary to release the standby mode of the pins. (For detail, refer to the PMU section.)

- GPIO2 clock supply

PMU register	Bit name	value
<i>[CG_OFF_POWERDOMAIN]</i>	CG_PM	0x00000001
<i>[CG_OFF_PM_2]</i>	CG_ppier0clk_gpio2_pclk	0x00000040

Note: Bit 6 in the *[CG_OFF_PM_2]* register corresponds to the GPIO2.

- Reset deassertion of the GPIO2

PMU register	Bit name	value
<i>[SRST_OFF_POWERDOMAIN]</i>	SRST_PM	0x00000001
<i>[SRST_OFF_PM_2]</i>	SRST_asyncrst_gpio2_prstn	0x00000040

Note: Bit 6 in the *[SRST_OFF_PM_2]* register corresponds to the GPIO2.

The start-up sequence of the GPIO3 is as follows.

Setting of the external shared pins at first, then release of the standby for the external pins, Clock supply, and deassertion of the reset at last.

- Setting of the external shared pins of the GPIO3

It is necessary that the GCONF should configure the shared pins to input or output data. (For detail, refer to the GCONF section.)

- Standby mode release of the external pins in the GPIO3

When the external pins are used, it is necessary to release the standby mode of the pins. (For detail, refer to the PMU section.)

- GPIO3 clock supply

PMU register	Bit name	value
<i>[CG_OFF_POWERDOMAIN]</i>	CG_PM	0x00000001
<i>[CG_OFF_PM_2]</i>	CG_ppier0clk_gpio3_pclk	0x00000080

Note: Bit 7 in the *[CG_OFF_PM_2]* register corresponds to the GPIO3.

- Reset deassertion of the GPIO3

PMU register	Bit name	value
<i>[SRST_OFF_POWERDOMAIN]</i>	SRST_PM	0x00000001
<i>[SRST_OFF_PM_2]</i>	SRST_asyncrst_gpio3_prstn	0x00000080

Note: Bit 7 in the *[SRST_OFF_PM_2]* register corresponds to the GPIO3.

- GPIO setting

- After deasserting the reset, the GPIO becomes the input.
The input or output operation is set by writing the following register.
- The data direction, the output data and others are set to the *[GPIO_n_GPIODIR]*, and *[GPIO_n_GPIODATA]* registers.
(n is a channel number: 0, 1, 2, and 3.)

5.3.2. Stop procedure

- In case that the GPIO is not used (the whole block stops):

The following two ways are used.

- No reset assertion:

Only the clock supply is stopped by the following PMU register setting.

- Reset assertion:

The reset assertion and the clock stop are set by the following PMU register.

- GPIO0 reset

PMU register	Bit name	value
[SRST_ON_PM_2]	SRST_asyncrst_gpio0_prstn	0x000000010

Note: Bit 4 in the [SRST_ON_PM_2] register corresponds to the GPIO0.

- GPIO1 reset

PMU register	Bit name	value
[SRST_ON_PM_2]	SRST_asyncrst_gpio1_prstn	0x000000020

Note: Bit 5 in the [SRST_ON_PM_2] register corresponds to the GPIO1.

- GPIO2 reset

PMU register	Bit name	value
[SRST_ON_PM_2]	SRST_asyncrst_gpio2_prstn	0x000000040

Note: Bit 6 in the [SRST_ON_PM_2] register corresponds to the GPIO2.

- GPIO3 reset

PMU register	Bit name	value
[SRST_ON_PM_2]	SRST_asyncrst_gpio3_prstn	0x000000080

Note: Bit 7 in the [SRST_ON_PM_2] register corresponds to the GPIO3.

- GPIO0 clock supply stop

PMU register	Bit name	value
[CG_ON_PM_2]	CG_ppier0clk_gpio0_pclk	0x000000010

Note: Bit 4 in the [CG_ON_PM_2] register corresponds to the GPIO0.

- GPIO1 clock supply stop

PMU register	Bit name	value
[CG_ON_PM_2]	CG_ppier0clk_gpio1_pclk	0x000000020

Note: Bit 5 in the [CG_ON_PM_2] register corresponds to the GPIO1.

- GPIO2 clock supply stop

PMU register	Bit name	value
[CG_ON_PM_2]	CG_ppier0clk_gpio2_pclk	0x000000040

Note: Bit 6 in the [CG_ON_PM_2] register corresponds to the GPIO2.

- GPIO3 clock supply stop

PMU register	Bit name	value
[CG_ON_PM_2]	CG_ppier0clk_gpio3_pclk	0x000000080

Note: Bit 7 in the [CG_ON_PM_2] register corresponds to the GPIO3.

5.4. Dynamic Clock Gating Setting Procedure

The TZ1000 Series can be set to stop the clock supply unless the clock is necessary. When it is set, the following operation reduces power dissipation.

("**" shows the signal which also controls another function. The setting should be done together with another setting.)

- Clock supply only when the bus access to the GPIO.
(Only when the GPIOIS register is set to 0x000000ff, the dynamic clock gating is applied.
Otherwise, the clock is always supplied.)
- GPIO0 dynamic clock gating setting

PMU register	Bit name	value
[DCG_POWERDOMAIN]	DCG_PM	0x*****1
[DCG_PM_1]	DCG_ppier0clk_h2pp0_hclk	0x*****3
	DCG_mpierclk_h2hp0_hclk	
[DCG_PM_2]	DCG_ppier0clk_gpio0_pclk	0x*****1*

Note: Bit 4 in the [DCG_ON_PM_2] register corresponds to the GPIO0.

- GPIO1 dynamic clock gating setting

PMU register	Bit name	value
[DCG_POWERDOMAIN]	DCG_PM	0x*****1
[DCG_PM_1]	DCG_ppier0clk_h2pp0_hclk	0x*****3
	DCG_mpierclk_h2hp0_hclk	
[DCG_PM_2]	DCG_ppier0clk_gpio1_pclk	0x*****2*

Note: Bit 5 in the [DCG_ON_PM_2] register corresponds to the GPIO1.

- GPIO2 dynamic clock gating setting

PMU register	Bit name	value
[DCG_POWERDOMAIN]	DCG_PM	0x*****1
[DCG_PM_1]	DCG_ppier0clk_h2pp0_hclk	0x*****3
	DCG_mpierclk_h2hp0_hclk	
[DCG_PM_2]	DCG_ppier0clk_gpio2_pclk	0x*****4*

Note: Bit 6 in the [DCG_ON_PM_2] register corresponds to the GPIO2.

- GPIO3 dynamic clock gating setting

PMU register	Bit name	value
[DCG_POWERDOMAIN]	DCG_PM	0x*****1
[DCG_PM_1]	DCG_ppier0clk_h2pp0_hclk	0x*****3
	DCG_mpierclk_h2hp0_hclk	
[DCG_PM_2]	DCG_ppier0clk_gpio3_pclk	0x*****8*

Note: Bit 7 in the [DCG_ON_PM_2] register corresponds to the GPIO3.

The setting of the dynamic clock gating can be cleared by writing 0 to the corresponding bit.

- GPIO0 dynamic clock gating deassertion (GPIO0 only)

PMU register	Bit name	value
[DCG_PM_2]	DCG_ppier0clk_gpio0_pclk	0x*****0*

Note: Bit 4 in the [DCG_ON_PM_2] register corresponds to the GPIO0.

- GPIO1 dynamic clock gating deassertion (GPIO1 only)

PMU register	Bit name	value
[DCG_PM_2]	DCG_ppier0clk_gpio1_pclk	0x*****0*

Note: Bit 5 in the [DCG_ON_PM_2] register corresponds to the GPIO1.

- GPIO2 dynamic clock gating deassertion (GPIO2 only)

PMU register	Bit name	value
[DCG_PM_2]	DCG_ppier0clk_gpio2_pclk	0x*****0*

Note: Bit 6 in the [DCG_ON_PM_2] register corresponds to the GPIO2.

- GPIO3 dynamic clock gating deassertion (GPIO3 only)

PMU register	Bit name	value
[DCG_PM_2]	DCG_ppier0clk_gpio3_pclk	0x*****0*

Note: Bit 7 in the [DCG_ON_PM_2] register corresponds to the GPIO3.

6. Precaution for Usage

6.1. Access Restriction Associated with Register Access

The registers in this module are assigned to a 4 KB space with 32-bit interval in the little endian format. The bit locations are as follows.

This module is connected to the main data bus (the bus connected to the CPU) with 32-bit wide. When 8-bit or 16-bit data is accessed, the operation is in units of 32-bit only. The GPIO register is assigned to the 8 bits in the lower address 0. This means that the write to the other location (for example, the 8 bits in the lower address) causes the wrong write to the register. So, 32-bit access is recommended. Otherwise, a read error or a write error may occur.

The write to a non-existing bit in a register is ignored. The read of the bit returns 0.

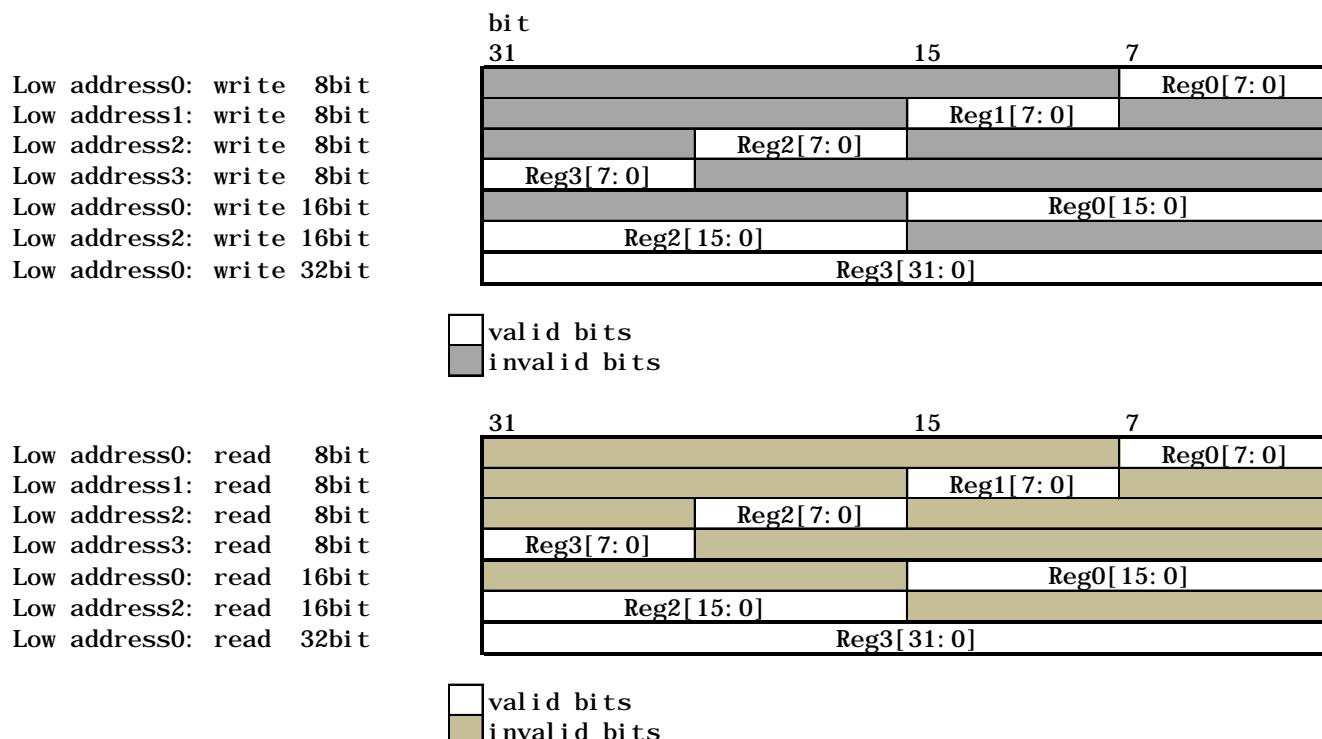


Figure 6.1 Bit allocation of register access

7. Details of MCU General-Purpose Input/Output Controller 0 Registers

7.1. GPIO0_GPIODATA

GPIO0_GPIODATA							
Description		GPIO Data Register					
Address Region		gpio0	Type:	RW			
Offset		0x0000 0000-					
Physical address View0		0x4004 B000- 0x4004 B3FC					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DATA	At reading: The logical product of the address to be accessed and terminal status can be read. PADDR[9:2] & GPIN[7:0] At writing: The logical product of the address to be accessed and written data and GPIO output settings is set for the terminal. PADDR[9:2] & PWDATA[7:0] & [GPIO0_GPIODIR].DIR[7:0]	RW modify	0x00			

7.2. GPIO0_GPIODIR

GPIO0_GPIODIR							
Description		GPIO Data Direction Register					
Address Region		gpio0	Type:	RW			
Offset		0x0000 0400					
Physical address View0		0x4004 B400					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DIR	Sets the data direction of each GPIO pin. 0b1: GPIO output 0b0: GPIO input	RW modify	0x00			

7.3. GPIO0_GPIOIS

GPIO0_GPIOIS							
Description		GPIO Interrupt Sense Register					
Address Region		gpio0	Type:	RW			
Offset		0x0000 0404					
Physical address View0		0x4004 B404					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			

31:8	Reserved	-	-	-
7:0	IS	Sets the interrupt detection method of each GPIO pin. GPIOIEV specifies other settings. 0b1: Level detection interrupt 0b0: Edge detection interrupt	RW modify	0x00

7.4. GPIO0_GPIOIBE

GPIO0_GPIOIBE				
Description		GPIO Interrupt Both Edges Register		
Address Region		gpio0	Type:	RW
Offset		0x0000 0408		
Physical address View0		0x4004 B408		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IBE	Sets both-edge interrupt of each GPIO pin. GPIOIEV determines the edge to be used. 0b1: Both-edge interrupt 0b0: Single edge interrupt	RW modify	0x00

7.5. GPIO0_GPIOIEV

GPIO0_GPIOIEV				
Description		GPIO Interrupt Event Register		
Address Region		gpio0	Type:	RW
Offset		0x0000 040C		
Physical address View0		0x4004 B40C		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IEV	Sets the edge interrupt method of each GPIO pin. 0b1: Rising edge interrupt or High-level interrupt 0b0: Falling edge interrupt or low-level interrupt	RW modify	0x00

7.6. GPIO0_GPIOIE

GPIO0_GPIOIE				
Description		GPIO Interrupt Enable Register		
Address Region		gpio0	Type:	RW
Offset		0x0000 0410		
Physical address View0		0x4004 B410		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IE	Sets interrupt enable/mask for each GPIO pin. 0b1: Does not mask the interrupt (interrupt enable) 0b0: Masks the interrupt (interrupt disable)	RW modify	0x00

7.7. GPIO0_GPIORIS

GPIO0_GPIORIS				
Description		GPIO Raw Interrupt Status Register		
Address Region		gpio0	Type:	RO
Offset		0x0000 0414		
Physical address View0		0x4004 B414		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	RIS	Interrupt status before masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

7.8. GPIO0_GPIOMIS

GPIO0_GPIOMIS				
Description		GPIO Masked Interrupt Status Register		
Address Region		gpio0	Type:	RO
Offset		0x0000 0418		
Physical address View0		0x4004 B418		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	MIS	Interrupt status after masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

7.9. GPIO0_GPIOIC

GPIO0_GPIOIC				
Description		GPIO Interrupt Clear Register		
Address Region		gpio0	Type:	RW
Offset		0x0000 041C		
Physical address View0		0x4004 B41C		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IC	Clears an interrupt for each GPIO pin. 0b1: Clears the interrupt. 0b0: Does nothing.	RW oneToClear	0x00

7.10. GPIO0_GPIOITCR

GPIO0_GPIOITCR				
Description		GPIO Integration Test Control Register		
Address Region		gpio0	Type:	RW
Offset		0x0000 0600		
Physical address View0		0x4004 B600		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	ITEN	Integration test enable 0b1: Test mode 0b0: Normal operation	RW modify	0

7.11. GPIO0_GPIOITIP1

GPIO0_GPIOITIP1				
Description		GPIO Integration test input read/set Register 1		
Address Region		gpio0	Type:	RW
Offset		0x0000 0604		
Physical address View0		0x4004 B604		
Physical address View1		-		
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFOUT	For ITEM=1(Integration test mode), enables the GPAFOUT input signal to be controlled. At reading: Reads the output status of Mux at the GPAFOUT last stage. At writing: Enables alternate data to be written for GPAFOUT input. For ITEM=0(Normal mod), the GPAFOUT input status can be read intact. No operation for writing.	RW modify	0x00

7.12. GPIO0_GPIOITIP2

GPIO0_GPIOITIP2							
Description		GPIO Integration test input read/set Register 2					
Address Region		gpio0	Type:	RW			
Offset		0x0000 0608					
Physical address View0		0x4004 B608					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	nGPAFEN	<p>For ITEM=1(Integration test mode), enables the nGPAFEN input signal to be controlled.</p> <p>At reading: Reads the output status of Mux at the nGPAFEN last stage.</p> <p>At writing: Enables alternate data to be written for nGPAFEN input.</p> <p>For ITEM=0(Normal mod), the nGPAFEN input status can be read intact. No operation for writing.</p>	RW modify	0x00			

7.13. GPIO0_GPIOITOP1

GPIO0_GPIOITOP1							
Description		GPIO Integration test output read/set Register 1					
Address Region		gpio0	Type:	RW			
Offset		0x0000 060C					
Physical address View0		0x4004 B60C					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	GPIOIMIS	<p>For ITEM=1(Integration test mode), enables the GPIOIMIS output signal to be controlled.</p> <p>At reading: Returns 0.</p> <p>At writing: Writes data to be output to GPIOIMIS.</p> <p>For ITEM=0(Normal mod), no operation for writing.</p>	RW modify	0x00			

7.14. GPIO0_GPIOITOP2

GPIO0_GPIOITOP2				
Description	GPIO Integration test output read/set Register 2			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0610			
Physical address View0	0x4004 B610			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	GPIOINTR	For ITEM=1(Integration test mode), enables the status of the GPIOINTR output signal to be read. At reading: Reads the GPIOINTR status (GPIOINTR is a signal with GPIOMIS[7:0] being ORed).	RO	0

7.15. GPIO0_GPIOITOP3

GPIO0_GPIOITOP3				
Description	GPIO Integration test output read/set Register 3			
Address Region	gpio0	Type:	RW	
Offset	0x0000 0614			
Physical address View0	0x4004 B614			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFIN	For ITEM=1(Integration test mode), enables the GPAFIN output signal to be controlled. At reading: Reads the output status of Mux at the GPAFIN last stage. At writing: Writes data to be output to GPAFIN. For ITEM=0(Normal mod), the GPAFIN output status can be read intact. No operation for writing.	RW modify	0x00

7.16. GPIO0_GPIOPERIPHID0

GPIO0_GPIOPERIPHID0				
Description	GPIO Peripheral ID0 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FE0			
Physical address View0	0x4004 BFE0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Parnumber0	Peripheral ID (this register stores a value from a hardware viewpoint.) Parnumber(Lower) 061=>61	RO	0x61

7.17. GPIO0_GPIOPERIPHID1

GPIO0_GPIOPERIPHID1				
Description	GPIO Peripheral ID1 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FE4			
Physical address View0	0x4004 BFE4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Designer0	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Lower) 41=>1	RO	0x1
3:0	Parnumber1	Peripheral ID (this register stores a value from a hardware viewpoint.) Parnumber(Upper) 061=>0	RO	0x0

7.18. GPIO0_GPIOPERIPHID2

GPIO0_GPIOPERIPHID2				
Description	GPIO Peripheral ID2 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FE8			
Physical address View0	0x4004 BFE8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Revision	Peripheral ID (this register stores a value from a hardware viewpoint.) Revision: r1p0=>0	RO	0x0
3:0	Designer1	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Upper) 41=>4	RO	0x4

7.19. GPIO0_GPIOPERIPHID3

GPIO0_GPIOPERIPHID3				
Description	GPIO Peripheral ID3 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FEC			
Physical address View0	0x4004 BFEC			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Configuration	Peripheral ID (this register stores a value from a hardware viewpoint.) Configuration: 00	RO	0x00

7.20. GPIO0_GPIOPCELLID0

GPIO0_GPIOPCELLID0				
Description	GPIO PrimeCell ID0 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 OFF0			
Physical address View0	0x4004 BFF0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID0	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x0D

7.21. GPIO0_GPIOPCELLID1

GPIO0_GPIOPCELLID1				
Description	GPIO PrimeCell ID1 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 OFF4			
Physical address View0	0x4004 BFF4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID1	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xF0

7.22. GPIO0_GPIOPCELLID2

GPIO0_GPIOPCELLID2				
Description	GPIO PrimeCell ID2 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FF8			
Physical address View0	0x4004 BFF8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID2	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x05

7.23. GPIO0_GPIOPCELLID3

GPIO0_GPIOPCELLID3				
Description	GPIO PrimeCell ID3 Register			
Address Region	gpio0	Type:	RO	
Offset	0x0000 0FFC			
Physical address View0	0x4004 BFFC			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID3	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xB1

8. Details of MCU General-Purpose Input/Output Controller 1 Registers

8.1. GPIO1_GPIODATA

GPIO1_GPIODATA							
Description		GPIO Data Register					
Address Region		gpio1	Type:	RW			
Offset		0x0000 0000-					
Physical address View0		0x4004 C000- 0x4004 C3FC					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DATA	At reading: The logical product of the address to be accessed and terminal status can be read. PADDR[9:2] & GPIN[7:0] At writing: The logical product of the address to be accessed and written data and GPIO output settings is set for the terminal. PADDR[9:2] & PWDATA[7:0] & [GPIO1_GPIODIR].DIR[7:0]	RW modify	0x00			

8.2. GPIO1_GPIODIR

GPIO1_GPIODIR							
Description		GPIO Data Direction Register					
Address Region		gpio1	Type:	RW			
Offset		0x0000 0400					
Physical address View0		0x4004 C400					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DIR	Sets the data direction of each GPIO pin. 0b1: GPIO output 0b0: GPIO input	RW modify	0x00			

8.3. GPIO1_GPIOIS

GPIO1_GPIOIS				
Description GPIO Interrupt Sense Register Address Region gpio1 Type: RW Offset 0x0000 0404 Physical address View0 0x4004 C404 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IS	Sets the interrupt detection method of each GPIO pin. GPIOIEV specifies other settings. 0b1: Level detection interrupt 0b0: Edge detection interrupt	RW modify	0x00

8.4. GPIO1_GPIOIBE

GPIO1_GPIOIBE				
Description GPIO Interrupt Both Edges Register Address Region gpio1 Type: RW Offset 0x0000 0408 Physical address View0 0x4004 C408 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IBE	Sets both-edge interrupt of each GPIO pin. GPIOIEV determines the edge to be used. 0b1: Both-edge interrupt 0b0: Single edge interrupt	RW modify	0x00

8.5. GPIO1_GPIOIEV

GPIO1_GPIOIEV				
Description GPIO Interrupt Event Register Address Region gpio1 Type: RW Offset 0x0000 040C Physical address View0 0x4004 C40C Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IEV	Sets the edge interrupt method of each GPIO pin. 0b1: Rising edge interrupt or High-level interrupt 0b0: Falling edge interrupt or low-level interrupt	RW modify	0x00

8.6. GPIO1_GPIOIE

GPIO1_GPIOIE				
Description	GPIO Interrupt Enable Register			
Address Region	gpio1	Type:	RW	
Offset	0x0000 0410			
Physical address View0	0x4004 C410			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IE	Sets interrupt enable/mask for each GPIO pin. 0b1: Does not mask the interrupt (interrupt enable) 0b0: Masks the interrupt (interrupt disable)	RW modify	0x00

8.7. GPIO1_GPIORIS

GPIO1_GPIORIS				
Description	GPIO Raw Interrupt Status Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0414			
Physical address View0	0x4004 C414			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	RIS	Interrupt status before masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

8.8. GPIO1_GPIOMIS

GPIO1_GPIOMIS				
Description	GPIO Masked Interrupt Status Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0418			
Physical address View0	0x4004 C418			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	MIS	Interrupt status after masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

8.9. GPIO1_GPIOIC

GPIO1_GPIOIC				
Description	GPIO Interrupt Clear Register			
Address Region	gpio1	Type:	RW	
Offset	0x0000 041C			
Physical address View0	0x4004 C41C			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IC	Clears an interrupt for each GPIO pin. 0b1: Clears the interrupt. 0b0: Does nothing.	RW oneToClear	0x00

8.10. GPIO1_GPIOITCR

GPIO1_GPIOITCR				
Description	GPIO Integration Test Control Register			
Address Region	gpio1	Type:	RW	
Offset	0x0000 0600			
Physical address View0	0x4004 C600			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	ITEN	Integration test enable 0b1: Test mode 0b0: Normal operation	RW modify	0

8.11. GPIO1_GPIOITIP1

GPIO1_GPIOITIP1				
Description	GPIO Integration test input read/set Register 1			
Address Region	gpio1	Type:	RW	
Offset	0x0000 0604			
Physical address View0	0x4004 C604			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFOUT	For ITEM=1(Integration test mode), enables the GPAFOUT input signal to be controlled. At reading: Reads the output status of Mux at the GPAFOUT last stage. At writing: Enables alternate data to be written for GPAFOUT input. For ITEM=0(Normal mod), the GPAFOUT input status can be read intact. No operation for writing.	RW modify	0x00

8.12. GPIO1_GPIOITIP2

GPIO1_GPIOITIP2				
Description GPIO Integration test input read/set Register 2 Address Region gpio1 Type: RW Offset 0x0000 0608 Physical address View0 0x4004 C608 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	nGPAFEN	For ITEM=1(Integration test mode), enables the nGPAFEN input signal to be controlled. At reading: Reads the output status of Mux at the nGPAFEN last stage. At writing: Enables alternate data to be written for nGPAFEN input. For ITEM=0(Normal mod), the nGPAFEN input status can be read intact. No operation for writing.	RW modify	0x00

8.13. GPIO1_GPIOITOP1

GPIO1_GPIOITOP1				
Description GPIO Integration test output read/set Register 1 Address Region gpio1 Type: RW Offset 0x0000 060C Physical address View0 0x4004 C60C Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPIOIMIS	For ITEM=1(Integration test mode), enables the GPIOIMIS output signal to be controlled. At reading: Returns 0. At writing: Writes data to be output to GPIOIMIS. For ITEM=0(Normal mod), no operation for writing.	RW modify	0x00

8.14. GPIO1_GPIOITOP2

GPIO1_GPIOITOP2				
Description GPIO Integration test output read/set Register 2 Address Region gpio1 Type: RO Offset 0x0000 0610 Physical address View0 0x4004 C610 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	GPIOINTR	For ITEM=1(Integration test mode), enables the status of the GPIOINTR output signal to be read. At reading: Reads the GPIOINTR status (GPIOINTR is a signal with GPIOMIS[7:0] being ORed).	RO	0

8.15. GPIO1_GPIOITOP3

GPIO1_GPIOITOP3				
Description GPIO Integration test output read/set Register 3 Address Region gpio1 Type: RW Offset 0x0000 0614 Physical address View0 0x4004 C614 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFIN	For ITEM=1(Integration test mode), enables the GPAFIN output signal to be controlled. At reading: Reads the output status of Mux at the GPAFIN last stage. AT writing: Writes data to be output to GPAFIN. For ITEM=0(Normal mod), the GPAFIN output status can be read intact. No operation for writing.	RW modify	0x00

8.16. GPIO1_GPIOPERIPHID0

GPIO1_GPIOPERIPHID0				
Description	GPIO Peripheral ID0 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FE0			
Physical address View0	0x4004 CFE0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Parnumber0	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Lower) 061=>61	RO	0x61

8.17. GPIO1_GPIOPERIPHID1

GPIO1_GPIOPERIPHID1				
Description	GPIO Peripheral ID1 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FE4			
Physical address View0	0x4004 CFE4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Designer0	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Lower) 41=>1	RO	0x1
3:0	Partnumber1	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Upper) 061=>0	RO	0x0

8.18. GPIO1_GPIOPERIPHID2

GPIO1_GPIOPERIPHID2				
Description	GPIO Peripheral ID2 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FE8			
Physical address View0	0x4004 CFE8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Revision	Peripheral ID (this register stores a value from a hardware viewpoint.) Revision: r1p0=>0	RO	0x0
3:0	Designer1	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Upper) 41=>4	RO	0x4

8.19. GPIO1_GPIOPERIPHID3

GPIO1_GPIOPERIPHID3				
Description	GPIO Peripheral ID3 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FEC			
Physical address View0	0x4004 CFEC			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Configuration	Peripheral ID (this register stores a value from a hardware viewpoint.) Configuration: 00	RO	0x00

8.20. GPIO1_GPIOPCELLID0

GPIO1_GPIOPCELLID0				
Description	GPIO PrimeCell ID0 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FF0			
Physical address View0	0x4004 CFF0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID0	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x0D

8.21. GPIO1_GPIOPCELLID1

GPIO1_GPIOPCELLID1				
Description	GPIO PrimeCell ID1 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FF4			
Physical address View0	0x4004 CFF4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID1	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xF0

8.22. GPIO1_GPIOPCELLID2

GPIO1_GPIOPCELLID2				
Description	GPIO PrimeCell ID2 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FF8			
Physical address View0	0x4004 CFF8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID2	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x05

8.23. GPIO1_GPIOPCELLID3

GPIO1_GPIOPCELLID3				
Description	GPIO PrimeCell ID3 Register			
Address Region	gpio1	Type:	RO	
Offset	0x0000 0FFC			
Physical address View0	0x4004 CFFC			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID3	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xB1

9. Details of MCU General-Purpose Input/Output Controller 2 Registers

9.1. GPIO2_GPIODATA

GPIO2_GPIODATA					
Description		GPIO Data Register			
Address Region		gpio2	Type:	RW	
Offset		0x0000 0000-			
Physical address View0		0x4004 D000- 0x4004 D3FC			
Physical address View1		-			
Bitfield Details					
Bits	Name	Description	Access	Reset	
31:8	Reserved	-	-	-	
7:0	DATA	At reading: The logical product of the address to be accessed and terminal status can be read. PADDR[9:2] & GPIN[7:0] At writing: The logical product of the address to be accessed and written data and GPIO output settings is set for the terminal. PADDR[9:2] & PWDATA[7:0] & [GPIO2_GPIODIR].DIR[7:0]	RW modify	0x00	

9.2. GPIO2_GPIODIR

GPIO2_GPIODIR					
Description		GPIO Data Direction Register			
Address Region		gpio2	Type:	RW	
Offset		0x0000 0400			
Physical address View0		0x4004 D400			
Physical address View1		-			
Bitfield Details					
Bits	Name	Description	Access	Reset	
31:8	Reserved	-	-	-	
7:0	DIR	Sets the data direction of each GPIO pin. 0b1: GPIO output 0b0: GPIO input	RW modify	0x00	

9.3. GPIO2_GPIOIS

GPIO2_GPIOIS				
Description	GPIO Interrupt Sense Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 0404			
Physical address View0	0x4004 D404			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IS	Sets the interrupt detection method of each GPIO pin. GPIOIEV specifies other settings. 0b1: Level detection interrupt 0b0: Edge detection interrupt	RW modify	0x00

9.4. GPIO2_GPIOIBE

GPIO2_GPIOIBE				
Description	GPIO Interrupt Both Edges Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 0408			
Physical address View0	0x4004 D408			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IBE	Sets both-edge interrupt of each GPIO pin. GPIOIEV determines the edge to be used. 0b1: Both-edge interrupt 0b0: Single edge interrupt	RW modify	0x00

9.5. GPIO2_GPIOIEV

GPIO2_GPIOIEV				
Description	GPIO Interrupt Event Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 040C			
Physical address View0	0x4004 D40C			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IEV	Sets the edge interrupt method of each GPIO pin. 0b1: Rising edge interrupt or High-level interrupt 0b0: Falling edge interrupt or low-level interrupt	RW modify	0x00

9.6. GPIO2_GPIOIE

GPIO2_GPIOIE				
Description	GPIO Interrupt Enable Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 0410			
Physical address View0	0x4004 D410			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IE	Sets interrupt enable/mask for each GPIO pin. 0b1: Does not mask the interrupt (interrupt enable) 0b0: Masks the interrupt (interrupt disable)	RW modify	0x00

9.7. GPIO2_GPIORIS

GPIO2_GPIORIS				
Description	GPIO Raw Interrupt Status Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0414			
Physical address View0	0x4004 D414			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	RIS	Interrupt status before masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

9.8. GPIO2_GPIOMIS

GPIO2_GPIOMIS				
Description	GPIO Masked Interrupt Status Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0418			
Physical address View0	0x4004 D418			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	MIS	Interrupt status after masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

9.9. GPIO2_GPIOIC

GPIO2_GPIOIC				
Description	GPIO Interrupt Clear Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 041C			
Physical address View0	0x4004 D41C			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IC	Clears an interrupt for each GPIO pin. 0b1: Clears the interrupt. 0b0: Does nothing.	RW oneToClear	0x00

9.10. GPIO2_GPIOITCR

GPIO2_GPIOITCR				
Description	GPIO Integration Test Control Register			
Address Region	gpio2	Type:	RW	
Offset	0x0000 0600			
Physical address View0	0x4004 D600			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	ITEN	Integration test enable 0b1: Test mode 0b0: Normal operation	RW modify	0

9.11. GPIO2_GPIOITIP1

GPIO2_GPIOITIP1				
Description	GPIO Integration test input read/set Register 1			
Address Region	gpio2	Type:	RW	
Offset	0x0000 0604			
Physical address View0	0x4004 D604			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFOUT	For ITEM=1(Integration test mode), enables the GPAFOUT input signal to be controlled. At reading: Reads the output status of Mux at the GPAFOUT last stage. At writing: Enables alternate data to be written for GPAFOUT input. For ITEM=0(Normal mod), the GPAFOUT input status can be read intact. No operation for writing.	RW modify	0x00

9.12. GPIO2_GPIOITIP2

GPIO2_GPIOITIP2							
Description		GPIO Integration test input read/set Register 2					
Address Region		gpio2	Type:	RW			
Offset		0x0000 0608					
Physical address View0		0x4004 D608					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	nGPAFEN	<p>For ITEM=1(Integration test mode), enables the nGPAFEN input signal to be controlled.</p> <p>At reading: Reads the output status of Mux at the nGPAFEN last stage.</p> <p>At writing: Enables alternate data to be written for nGPAFEN input.</p> <p>For ITEM=0(Normal mod), the nGPAFEN input status can be read intact. No operation for writing.</p>	RW modify	0x00			

9.13. GPIO2_GPIOITOP1

GPIO2_GPIOITOP1							
Description		GPIO Integration test output read/set Register 1					
Address Region		gpio2	Type:	RW			
Offset		0x0000 060C					
Physical address View0		0x4004 D60C					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	GPIOMIS	<p>For ITEM=1(Integration test mode), enables the GPIOMIS output signal to be controlled.</p> <p>At reading: Returns 0.</p> <p>At writing: Writes data to be output to GPIOMIS.</p> <p>For ITEM=0(Normal mod), no operation for writing.</p>	RW modify	0x00			

9.14. GPIO2_GPIOITOP2

GPIO2_GPIOITOP2				
Description GPIO Integration test output read/set Register 2 Address Region gpio2 Type: RO Offset 0x0000 0610 Physical address View0 0x4004 D610 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	GPIOINTR	For ITEM=1(Integration test mode), enables the status of the GPIOINTR output signal to be read. At reading: Reads the GPIOINTR status (GPIOINTR is a signal with GPIOMIS[7:0] being ORed).	RO	0

9.15. GPIO2_GPIOITOP3

GPIO2_GPIOITOP3				
Description GPIO Integration test output read/set Register 3 Address Region gpio2 Type: RW Offset 0x0000 0614 Physical address View0 0x4004 D614 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFIN	For ITEM=1(Integration test mode), enables the GPAFIN output signal to be controlled. At reading: Reads the output status of Mux at the GPAFIN last stage. AT writing: Writes data to be output to GPAFIN. For ITEM=0(Normal mod), the GPAFIN output status can be read intact. No operation for writing.	RW modify	0x00

9.16. GPIO2_GPIOPERIPHID0

GPIO2_GPIOPERIPHID0				
Description	GPIO Peripheral ID0 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0FE0			
Physical address View0	0x4004 DFE0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Parnumber0	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Lower) 061=>61	RO	0x61

9.17. GPIO2_GPIOPERIPHID1

GPIO2_GPIOPERIPHID1				
Description	GPIO Peripheral ID1 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0FE4			
Physical address View0	0x4004 DFE4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Designer0	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Lower) 41=>1	RO	0x1
3:0	Partnumber1	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Upper) 061=>0	RO	0x0

9.18. GPIO2_GPIOPERIPHID2

GPIO2_GPIOPERIPHID2				
Description	GPIO Peripheral ID2 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0FE8			
Physical address View0	0x4004 DFE8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Revision	Peripheral ID (this register stores a value from a hardware viewpoint.) Revision: r1p0=>0	RO	0x0
3:0	Designer1	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Upper) 41=>4	RO	0x4

9.19. GPIO2_GPIOPERIPHID3

GPIO2_GPIOPERIPHID3				
Description	GPIO Peripheral ID3 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 0FEC			
Physical address View0	0x4004 DFEC			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Configuration	Peripheral ID (this register stores a value from a hardware viewpoint.) Configuration: 00	RO	0x00

9.20. GPIO2_GPIOPCELLID0

GPIO2_GPIOPCELLID0				
Description	GPIO PrimeCell ID0 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 OFF0			
Physical address View0	0x4004 DFF0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID0	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x0D

9.21. GPIO2_GPIOPCELLID1

GPIO2_GPIOPCELLID1				
Description	GPIO PrimeCell ID1 Register			
Address Region	gpio2	Type:	RO	
Offset	0x0000 OFF4			
Physical address View0	0x4004 DFF4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID1	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xF0

9.22. GPIO2_GPIOPCELLID2

GPIO2_GPIOPCELLID2				
Description GPIO PrimeCell ID2 Register Address Region gpio2 Type: RO Offset 0x0000 0FF8 Physical address View0 0x4004 DFF8 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID2	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x05

9.23. GPIO2_GPIOPCELLID3

GPIO2_GPIOPCELLID3				
Description GPIO PrimeCell ID3 Register Address Region gpio2 Type: RO Offset 0x0000 0FFC Physical address View0 0x4004 DFFC Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID3	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xB1

10. Details of MCU General-Purpose Input/Output Controller 3 Registers

10.1. GPIO3_GPIODATA

GPIO3_GPIODATA							
Description		GPIO Data Register					
Address Region		gpio3	Type:	RW			
Offset		0x0000 0000-					
Physical address View0		0x4004 E000- 0x4004 E3FC					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DATA	At reading: The logical product of the address to be accessed and terminal status can be read. PADDR[9:2] & GPIN[7:0] At writing: The logical product of the address to be accessed and written data and GPIO output settings is set for the terminal. PADDR[9:2] & PWDATA[7:0] & [GPIO3_GPIODIR].DIR[7:0]	RW modify	0x00			

10.2. GPIO3_GPIODIR

GPIO3_GPIODIR							
Description		GPIO Data Direction Register					
Address Region		gpio3	Type:	RW			
Offset		0x0000 0400					
Physical address View0		0x4004 E400					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	DIR	Sets the data direction of each GPIO pin. 0b1: GPIO output 0b0: GPIO input	RW modify	0x00			

10.3. GPIO3_GPIOIS

GPIO3_GPIOIS				
Description	GPIO Interrupt Sense Register			
Address Region	gpio3	Type:	RW	
Offset	0x0000 0404			
Physical address View0	0x4004 E404			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IS	Sets the interrupt detection method of each GPIO pin. GPIOIEV specifies other settings. 0b1: Level detection interrupt 0b0: Edge detection interrupt	RW modify	0x00

10.4. GPIO3_GPIOIBE

GPIO3_GPIOIBE				
Description	GPIO Interrupt Both Edges Register			
Address Region	gpio3	Type:	RW	
Offset	0x0000 0408			
Physical address View0	0x4004 E408			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IBE	Sets both-edge interrupt of each GPIO pin. GPIOIEV determines the edge to be used. 0b1: Both-edge interrupt 0b0: Single edge interrupt	RW modify	0x00

10.5. GPIO3_GPIOIEV

GPIO3_GPIOIEV				
Description	GPIO Interrupt Event Register			
Address Region	gpio3	Type:	RW	
Offset	0x0000 040C			
Physical address View0	0x4004 E40C			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IEV	Sets the edge interrupt method of each GPIO pin. 0b1: Rising edge interrupt or High-level interrupt 0b0: Falling edge interrupt or low-level interrupt	RW modify	0x00

10.6. GPIO3_GPIOIE

GPIO3_GPIOIE				
Description GPIO Interrupt Enable Register Address Region gpio3 Type: RW Offset 0x0000 0410 Physical address View0 0x4004 E410 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IE	Sets interrupt enable/mask for each GPIO pin. 0b1: Does not mask the interrupt (interrupt enable) 0b0: Masks the interrupt (interrupt disable)	RW modify	0x00

10.7. GPIO3_GPIORIS

GPIO3_GPIORIS				
Description GPIO Raw Interrupt Status Register Address Region gpio3 Type: RO Offset 0x0000 0414 Physical address View0 0x4004 E414 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	RIS	Interrupt status before masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

10.8. GPIO3_GPIOMIS

GPIO3_GPIOMIS				
Description GPIO Masked Interrupt Status Register Address Region gpio3 Type: RO Offset 0x0000 0418 Physical address View0 0x4004 E418 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	MIS	Interrupt status after masking for each GPIO pin 0b1: Interrupt request available 0b0: No interrupt request	RO	0x00

10.9. GPIO3_GPIOIC

GPIO3_GPIOIC				
Description	GPIO Interrupt Clear Register			
Address Region	gpio3	Type:	RW	
Offset	0x0000 041C			
Physical address View0	0x4004 E41C			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	IC	Clears an interrupt for each GPIO pin. 0b1: Clears the interrupt. 0b0: Does nothing.	RW oneToClear	0x00

10.10. GPIO3_GPIOITCR

GPIO3_GPIOITCR				
Description	GPIO Integration Test Control Register			
Address Region	gpio3	Type:	RW	
Offset	0x0000 0600			
Physical address View0	0x4004 E600			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	ITEN	Integration test enable 0b1: Test mode 0b0: Normal operation	RW modify	0

10.11. GPIO3_GPIOITIP1

GPIO3_GPIOITIP1				
Description	GPIO Integration test input read/set Register 1			
Address Region	gpio3	Type:	RW	
Offset	0x0000 0604			
Physical address View0	0x4004 E604			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFOUT	For ITEM=1(Integration test mode), enables the GPAFOUT input signal to be controlled. At reading: Reads the output status of Mux at the GPAFOUT last stage. At writing: Enables alternate data to be written for GPAFOUT input. For ITEM=0(Normal mod), the GPAFOUT input status can be read intact. No operation for writing.	RW modify	0x00

10.12. GPIO3_GPIOITIP2

GPIO3_GPIOITIP2							
Description		GPIO Integration test input read/set Register 2					
Address Region		gpio3	Type:	RW			
Offset		0x0000 0608					
Physical address View0		0x4004 E608					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	nGPAFEN	<p>For ITEM=1(Integration test mode), enables the nGPAFEN input signal to be controlled.</p> <p>At reading: Reads the output status of Mux at the nGPAFEN last stage.</p> <p>At writing: Enables alternate data to be written for nGPAFEN input.</p> <p>For ITEM=0(Normal mod), the nGPAFEN input status can be read intact. No operation for writing.</p>	RW modify	0x00			

10.13. GPIO3_GPIOITOP1

GPIO3_GPIOITOP1							
Description		GPIO Integration test output read/set Register 1					
Address Region		gpio3	Type:	RW			
Offset		0x0000 060C					
Physical address View0		0x4004 E60C					
Physical address View1		-					
Bitfield Details							
Bits	Name	Description	Access	Reset			
31:8	Reserved	-	-	-			
7:0	GPIOIMIS	<p>For ITEM=1(Integration test mode), enables the GPIOIMIS output signal to be controlled.</p> <p>At reading: Returns 0.</p> <p>At writing: Writes data to be output to GPIOIMIS.</p> <p>For ITEM=0(Normal mod), no operation for writing.</p>	RW modify	0x00			

10.14. GPIO3_GPIOITOP2

GPIO3_GPIOITOP2				
Description GPIO Integration test output read/set Register 2 Address Region gpio3 Type: RO Offset 0x0000 0610 Physical address View0 0x4004 E610 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:1	Reserved	-	-	-
0	GPIOINTR	For ITEM=1(Integration test mode), enables the status of the GPIOINTR output signal to be read. At reading: Reads the GPIOINTR status (GPIOINTR is a signal with GPIOMIS[7:0] being ORed).	RO	0

10.15. GPIO3_GPIOITOP3

GPIO3_GPIOITOP3				
Description GPIO Integration test output read/set Register 3 Address Region gpio3 Type: RW Offset 0x0000 0614 Physical address View0 0x4004 E614 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	GPAFIN	For ITEM=1(Integration test mode), enables the GPAFIN output signal to be controlled. At reading: Reads the output status of Mux at the GPAFIN last stage. AT writing: Writes data to be output to GPAFIN. For ITEM=0(Normal mod), the GPAFIN output status can be read intact. No operation for writing.	RW modify	0x00

10.16. GPIO3_GPIOPERIPHID0

GPIO3_GPIOPERIPHID0				
Description	GPIO Peripheral ID0 Register			
Address Region	gpio3	Type:	RO	
Offset	0x0000 0FE0			
Physical address View0	0x4004 EFE0			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Parnumber0	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Lower) 061=>61	RO	0x61

10.17. GPIO3_GPIOPERIPHID1

GPIO3_GPIOPERIPHID1				
Description	GPIO Peripheral ID1 Register			
Address Region	gpio3	Type:	RO	
Offset	0x0000 0FE4			
Physical address View0	0x4004 EFE4			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Designer0	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Lower) 41=>1	RO	0x1
3:0	Partnumber1	Peripheral ID (this register stores a value from a hardware viewpoint.) Partnumber(Upper) 061=>0	RO	0x0

10.18. GPIO3_GPIOPERIPHID2

GPIO3_GPIOPERIPHID2				
Description	GPIO Peripheral ID2 Register			
Address Region	gpio3	Type:	RO	
Offset	0x0000 0FE8			
Physical address View0	0x4004 EFE8			
Physical address View1	-			
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:4	Revision	Peripheral ID (this register stores a value from a hardware viewpoint.) Revision: r1p0=>0	RO	0x0
3:0	Designer1	Peripheral ID (this register stores a value from a hardware viewpoint.) Designer(Upper) 41=>4	RO	0x4

10.19. GPIO3_GPIOPERIPHID3

GPIO3_GPIOPERIPHID3				
Description GPIO Peripheral ID3 Register Address Region gpio3 Type: RO Offset 0x0000 0FEC Physical address View0 0x4004 EFEC Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	Configuration	Peripheral ID (this register stores a value from a hardware viewpoint.) Configuration: 00	RO	0x00

10.20. GPIO3_GPIOPCELLID0

GPIO3_GPIOPCELLID0				
Description GPIO PrimeCell ID0 Register Address Region gpio3 Type: RO Offset 0x0000 0FF0 Physical address View0 0x4004 EFF0 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID0	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x0D

10.21. GPIO3_GPIOPCELLID1

GPIO3_GPIOPCELLID1				
Description GPIO PrimeCell ID1 Register Address Region gpio3 Type: RO Offset 0x0000 0FF4 Physical address View0 0x4004 EFF4 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID1	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xF0

10.22. GPIO3_GPIOPCELLID2

GPIO3_GPIOPCELLID2				
Description GPIO PrimeCell ID2 Register Address Region gpio3 Type: RO Offset 0x0000 0FF8 Physical address View0 0x4004 EFF8 Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID2	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0x05

10.23. GPIO3_GPIOPCELLID3

GPIO3_GPIOPCELLID3				
Description GPIO PrimeCell ID3 Register Address Region gpio3 Type: RO Offset 0x0000 0FFC Physical address View0 0x4004 EFFF Physical address View1 -				
Bitfield Details				
Bits	Name	Description	Access	Reset
31:8	Reserved	-	-	-
7:0	PCellID3	PrimeCell ID (this register stores a value from a hardware viewpoint). Fixed value.	RO	0xB1

11. Revision History

Table 11.1 Revision History

Revision	Date	Description
0.1	2014-10-14	Newly released
0.2	2015-01-07	Section 1 Added a description of the number of GPIO channel Section 5.2 Added register setting value for the interrupt disable
1.0	2015-01-22	Official version
1.1	2018-02-06	Changed header, footer and the last page. Changed corporate name and descriptions. Modified Arm logo and descriptions.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
 - Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
 - Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
 - The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
 - Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
 - Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**