

TC35679IFTG-002

Bluetooth[®] low energy IC

Rev 1.20



ARM[®]

The Bluetooth[®] word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc.
ARM and Cortex are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere.

Contents

| | | |
|----------|---|----|
| 1. | General Description..... | 4 |
| 1.1. | Product Concept..... | 4 |
| 1.2. | Features..... | 4 |
| 2. | Pin Function..... | 5 |
| 2.1. | TC35679IFTG Pin Assignment (Top View)..... | 5 |
| 2.2. | Pin Function Descriptions..... | 6 |
| 2.3. | GPIO function list..... | 9 |
| 2.4. | Power Supply Pins..... | 11 |
| 3. | System Configuration..... | 12 |
| 3.1. | Block Diagram..... | 12 |
| 4. | Functional Specifications..... | 13 |
| 4.1. | Bluetooth® Function..... | 13 |
| 4.1.1. | Supported Function..... | 13 |
| 4.1.2. | Support Protocol Layer..... | 14 |
| 4.1.3. | RF..... | 14 |
| 4.1.4. | Auto Advertise Function..... | 14 |
| 4.2. | Reset Interface (Power up sequence)..... | 15 |
| 4.2.1. | Features..... | 15 |
| 4.2.2. | Connection Example..... | 15 |
| 4.3. | UART Interface..... | 16 |
| 4.3.1. | Features..... | 16 |
| 4.3.2. | Connection Example..... | 16 |
| 4.3.3. | Frame Format..... | 17 |
| 4.3.4. | Flow Control Function..... | 17 |
| 4.3.5. | UART Baud Rate Setting..... | 18 |
| 4.3.6. | TX message spacing function..... | 18 |
| 4.3.7. | Error Detecting Functions..... | 19 |
| 4.3.8. | Host Wake up Function..... | 20 |
| 4.3.9. | HCI mode..... | 20 |
| 4.3.9.1. | HCI Reset..... | 20 |
| 4.4. | SPI Interface..... | 21 |
| 4.4.1. | Features..... | 21 |
| 4.4.2. | Connection Example..... | 21 |
| 4.4.3. | Frame Format..... | 22 |
| 4.5. | I ² C Interface..... | 23 |
| 4.5.1. | Features..... | 23 |
| 4.5.2. | Connection Example..... | 23 |
| 4.5.3. | Selection of External Pull-up Resistor Value..... | 24 |
| 4.5.4. | Frame Format..... | 25 |
| 4.6. | PWM Interface..... | 26 |
| 4.6.1. | Pulse Generation Function..... | 26 |
| 4.6.2. | Rhythm Function (Output Masking)..... | 27 |
| 4.7. | ADC..... | 28 |
| 4.7.1. | Features..... | 28 |
| 4.7.2. | Descriptions..... | 28 |
| 4.8. | IC Reference Clock Interface..... | 29 |
| 4.8.1. | Features..... | 29 |

| | | |
|----------|---|----|
| 4.8.2. | Crystal oscillator connection example..... | 29 |
| 4.9. | Sleep Clock Interface..... | 30 |
| 4.9.1. | Crystal oscillator connection example..... | 30 |
| 4.9.2. | External oscillator connection example..... | 30 |
| 5. | Electric Characteristics..... | 31 |
| 5.1. | Absolute Maximum Ratings..... | 31 |
| 5.2. | Operating Conditions..... | 32 |
| 5.3. | DC electric characteristics..... | 33 |
| 5.3.1. | Current Consumption (Design value)..... | 33 |
| 5.4. | Built-in Regulator Characteristics..... | 35 |
| 5.5. | ADC Characteristics..... | 35 |
| 5.6. | RF Characteristics..... | 36 |
| 5.7. | AC Interface Characteristics (Design value)..... | 38 |
| 5.7.1. | UART Interface..... | 38 |
| 5.7.2. | I ² C Interface..... | 39 |
| 5.7.2.1. | Normal Mode..... | 39 |
| 5.7.2.2. | Fast mode..... | 40 |
| 5.7.3. | SPI Interface..... | 41 |
| 6. | System Configuration Example..... | 42 |
| 6.1. | In case of Host CPU connection..... | 42 |
| 6.2. | In case of Standalone..... | 43 |
| 7. | Package outline..... | 44 |
| 7.1. | Outline dimensional drawing TC35679IFTG-002 (P-VQFN40-0606-0.50-002)..... | 44 |
| | RESTRICTIONS ON PRODUCT USE..... | 45 |

1. General Description

1.1. Product Concept

TC35679IFTG (Later omitted TC35679.) is compliant with Bluetooth® core specification 4.2. RF analog parts and baseband digital parts are built in it, and TC35679 provides Bluetooth® HCI (Host Control Interface) functions and Bluetooth® low energy GATT profile functions defined by Bluetooth® specifications. TC35679 works as an application using Bluetooth® low energy communication system by connected with external host processor or external non-volatile memory.

1.2. Features

- Compliant with Bluetooth® Ver4.2 low energy
 - ✧ Built-in ARM® Cortex®-M0 (13 MHz or 26 MHz operation frequency is able to select to run)
 - ✧ On-chip mask ROM for Bluetooth® program (384 KB)
 - ✧ On-chip work RAM for Bluetooth® Baseband process (192 KB)
 - ✧ Supports patch program loader function
- General Purpose IO (17 ports)
- General Purpose Serial Interfaces
 - ✧ SPI interface (1 ch - shared with a General Purpose IO)
 - ✧ I²C interface (1 ch - shared with a General Purpose IO)
- Host CPU Interface
 - ✧ UART interface (9600 bps to 921.6 kbps, 2 ch - shared with GPIOs)
 - ✧ SPI interface
- Emulator debug control interface
 - ✧ SWD (Serial Wire Debug) 2-wire (1 ch)
- Wake-up Interface (2 ch - shared with General Purpose IOs)
 - ✧ Wake-up input function from sleep and deep sleep
- PWM Interface (4 ch assigned to General Purpose IOs)
- Reference Clock Input (26 MHz)
 - ✧ Built-in oscillator for crystal oscillator connection
- Sleep Clock Supported (32.768 kHz)
 - ✧ External oscillator input supported
 - ✧ Built-in oscillator for crystal oscillator connection
- Works as external host control and standalone
(Please refer to the software application notes and programming guide for the method of control software design.)
- Sleep and Deep Sleep Functions
- Built-in DCDC converter and LDO
 - ✧ Wide range of input power supply voltages supported (1.8 to 3.6 V, Built-in low battery voltage detection.)
- Built-in general purpose ADC
 - ✧ External analog inputs (5 ch - shared with General Purpose IOs)
 - ✧ Internal Power supply voltage monitoring (1 ch - connected inside)
- External radio front-end control
 - ✧ Radio transmitting and receiving timing signal output (1 ch - shared with a General Purpose IO)
- Automatic Advertise Function
 - ✧ A user sets the arbitrary number of times to the register for Auto Advertise in the IC using an application program. Then the Advertise data to be set beforehand can be transmitted repeatedly without CPU process. (The register for Auto Advertise has 32 bits, the initial value is set to ten thousand times.)
- Operating temperature
 - ✧ Supported to 105°C. (Note that operating power supply voltage range is different in the case of 85°C.)
- Package:
 - ✧ TC35679IFTG: QFN Package [40 pin, 6 x 6 mm, 0.5 mm pitch, 1.0 mm thickness, wettable package]

2. Pin Function

2.1. TC35679IFTG Pin Assignment (Top View)

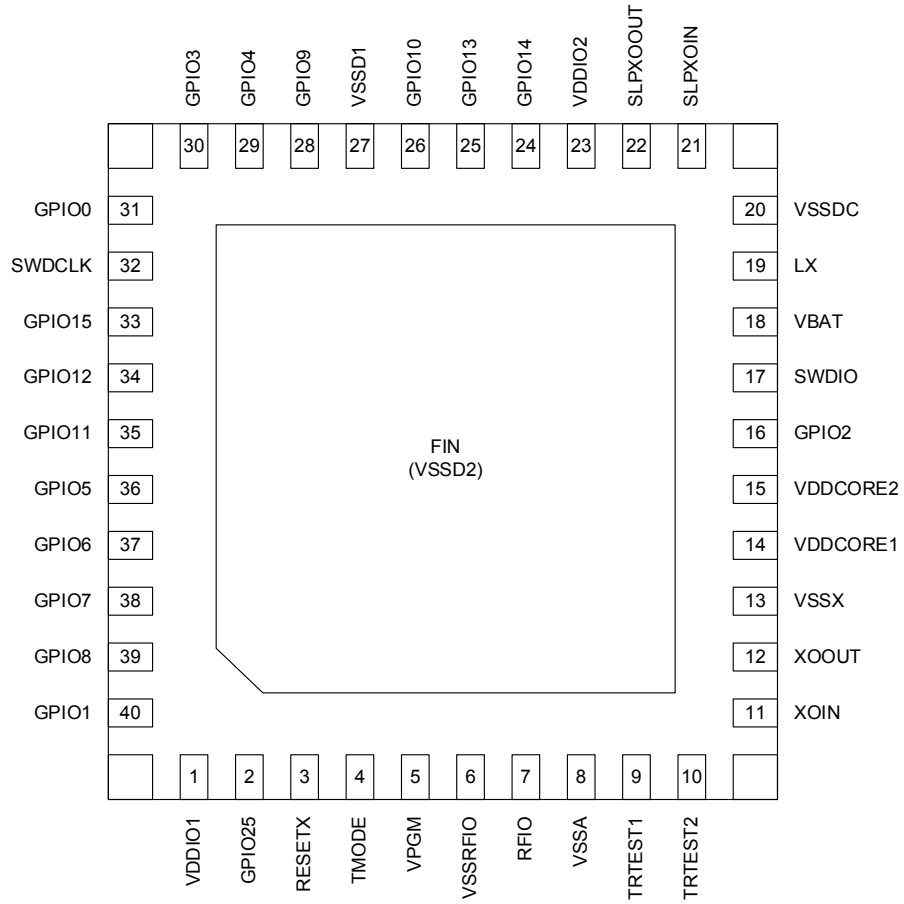


Figure 2-1 TC35679IFTG Pin Assignment (Top View)

2.2. Pin Function Descriptions

Table 2-1 shows attributes, input/output states for operating modes and descriptions for pin functions. Table 2-4 shows descriptions about power supply pins.

Table 2-1 Pin Functions

| Pin name | Pin No. | Attribute | Condition | Functional description |
|-----------------|---------|-----------------------------------|---------------------------|---|
| | | VDD category Direction Type | Default (during reset) | |
| Reset interface | | | | |
| RESETX | 3 | VDDIO IN Schmitt trigger | — | Hardware reset input pin. Setting this pin to Low level put the system at reset state. |
| Clock interface | | | | |
| XOIN | 11 | VDDCORE IN OSC | IN | Reference clock input pin. Please use oscillator with 26 MHz and < 50 ppm accuracy. A feedback resistor is built in between XOIN pin and XOOUT pin and a capacity array which can set parameters in the crystal oscillation circuit is built-in, so that external feedback resistances and capacities are unnecessary. |
| XOOUT | 12 | VDDCORE OUT OSC | OUT | Oscillator output for Baseband and RF reference clock (26 MHz) pin. A feedback resistor is built in between XOIN pin and XOOUT pin and a capacity array which can set parameters in the crystal oscillation circuit is built-in, so that external feedback resistances and capacities are unnecessary. |
| SLPXOIN | 21 | VDDIO IN OSC | IN | Sleep clock input pin from oscillator. Please use an oscillator with 32.768 kHz and < 500 ppm accuracy. A feedback resistor is built in between SLPXOIN pin and SLPXOOOUT pin and a capacity array which can set parameters in the crystal oscillation circuit is built-in, so that external feedback resistances and capacities are unnecessary. An external clock can be input from this pin. When the crystal oscillator is not used and do not supply a clock from the outside, this pin should be connected to the GND. |
| SLPXOOOUT | 22 | VDDIO IN/OUT OSC | OUT | Sleep clock output pin from oscillator. A feedback resistor is built in between SLPXOIN pin and SLPXOOOUT pin and a capacity array which can set parameters in the crystal oscillation circuit is built-in, so that external feedback resistances and capacities are unnecessary. When the crystal oscillator is not used and do not supply a clock from the outside, this pin should be connected to the GND. |

| Pin name | Pin No. | Attribute | Condition | Functional description |
|--|---|--|---------------------------|---|
| | | VDD category Direction Type | Default (during reset) | |
| RF interface | | | | |
| RFIO | 7 | VDDCORE IN/OUT Analog | — | RF I/O pins. This product incorporates the 50 Ω matching circuit, so that external matching circuit is unnecessary. The RF output pattern should wire with the 50 Ω transmission line. For details, refer to the hardware application note of this product. |
| General purpose I/O port | | | | |
| GPIO0 | 31 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Hi-Z | General purpose I/O pin. During reset, the pull-up and pull-down resistors are unconnected (input disable state). The same state continues just after the reset is released, and it will be controlled by software after that. After the pin configuration by software processing, it works as a GPIO pin of the input and output or Table 2-2 function. Pin processing when not using this function are listed in Table 2-2. (Note) |
| GPIO1 GPIO2 GPIO5 GPIO6 GPIO7 GPIO8 GPIO11 GPIO12 GPIO25 | 40 16 36 37 38 39 35 34 2 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Pull-up | General purpose I/O pins. During reset, the pull-up resistor is connected (input disable state). The pull-up resistor is connected (input state) just after the reset is released, and it will be controlled by software after that. After the pin configuration by software processing, it works as a GPIO pin of the input and output or Table 2-2 function. Pin processing when not using this function are listed in Table 2-2. In addition, GPIO1 pin is used in the case of switching operation modes. (Note) |
| GPIO3 GPIO4 GPIO9 GPIO10 GPIO14 | 30 29 28 26 24 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Hi-Z | ADC input and general purpose I/O pins. During reset, the pull-up and pull-down resistors are unconnected (input disable state). The same state continues just after the reset is released, and it will be controlled by software after that. Then the software configures pull-up/pull-down resistors, and the pin can function as general ADC input, or general purpose IO. Pin processing when not using this function are listed in Table 2-2. (Note) |

| Pin name | Pin No. | Attribute | Condition | Functional description |
|----------------------------------|---------|--|---------------------------|---|
| | | VDD category Direction Type | Default (during reset) | |
| GPIO13 | 25 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Pull-up | General purpose IO pin. During reset, the pull-up resistor is connected (input disable state). The pull-up and pull-down resistors are unconnected (input disable state) just after the reset is released, and it will be controlled by software after that. After the pin configuration by software processing, it works as a GPIO pin of the input and output or Table 2-2 function. (Note) |
| GPIO15 | 33 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Hi-Z | General purpose I/O pin. During reset, the pull-up and pull-down resistors are unconnected (input disable state). The pull-up resistor is connected (input state) just after the reset is released, and it will be controlled by software after that. After the pin configuration by software processing, it works as a GPIO pin of the input and output or Table 2-2 function. Pin processing when not using this function are listed in Table 2-2. (Note) |
| Emulator debug control interface | | | | |
| SWDCLK | 32 | VDDIO IN Pull-up Pull-down Schmitt trigger | Pull-down | Serial Wire debugger clock pin. During reset, the pull-down resistor is connected (input state). After the reset is released, the serial wire debugger clock is inputted. When not used, this pin should be open. |
| SWDIO | 17 | VDDIO IN/OUT Pull-up Pull-down Schmitt trigger | Pull-up | Serial Wire Debugger data pin and operation switching pin. During reset, the pull-up resistor is connected (input state). After the reset is released, the serial wire debugger data is inputted and outputted. When not used, this pin should be open. |
| IC test interface | | | | |
| TMODE | 4 | VDDIO IN Schmitt trigger | — | Test mode setting pin. This pin is used for IC manufacturing test and needs to be connected to GND when assembled on a board. |
| TRTEST1 | 9 | VDD12A | — | Analog test pins. |
| TRTEST2 | 10 | IN/OUT Analog | — | These pins are used for IC manufacturing test and need to be connected to GND when assembled on a board. |

Note: The state of the GPIO pin corresponds to the usage state in the user application mode. Since states differ partially when the operation is powered on with the HCl mode, please refer to the software application note about the detailed state and its setting method of each pin.

2.3. GPIO function list

GPIO pins can be assigned to UART I/Fs, serial memory I/Fs and etc. by TC35679 firmware or command from the external Host. Table 2-2 shows available functions for each GPIO pin, and Table 2-3 examples of GPIO function settings. About what function name shown in Table 2-2 is assigned to a plurality of pins in the same, please note that it cannot be assigned to select a plurality of pins at the same time.

Table 2-2 Available functions for GPIO

| Pin name | Function 1 | Function 2 | Function 3 | Function 4 | Analog input | The pins of Unused |
|----------|-------------------|-----------------|-----------------|-------------------|--------------|--------------------|
| GPIO0 | WakeUp0 Input | — | — | — | — | Open |
| GPIO1 | PWM0 Output | — | — | — | — | Open (Note) |
| GPIO2 | PWM1 Output | — | — | — | — | Open |
| GPIO3 | PWM2 Output | SPI-DOUT Output | — | — | ADC1 Input | Open |
| GPIO4 | PWM3 Output | SPI-DIN Input | — | — | ADC2 Input | Open |
| GPIO5 | UART1-TX Output | SPI-DOUT Output | — | — | — | Open |
| GPIO6 | UART1-RX Input | SPI-DIN Input | — | — | — | Open |
| GPIO7 | I2C-SCL Output | UART2-TX Output | SPI-SCS Output | UART1-RTSX Output | — | Open |
| GPIO8 | I2C-SDA I/O | UART2-RX Input | SPI-SCLK Output | UART1-CTS Input | — | Open |
| GPIO9 | — | — | — | — | ADC3 Input | Open |
| GPIO10 | — | — | — | — | ADC4 Input | Open |
| GPIO11 | I2C-SCL Output | SPI-DOUT Output | — | — | — | Open |
| GPIO12 | I2C-SDA I/O | SPI-DIN Input | — | — | — | Open |
| GPIO13 | UART1-RTSX Output | — | — | — | — | Open |
| GPIO14 | UART1-CTS Input | — | — | — | ADC5 Input | Open |
| GPIO15 | WakeUp1 Input | — | — | — | — | Open |
| GPIO25 | — | — | — | — | — | Open |

Note: Handle with care because of using operation mode switching.

Table 2-3 GPIO function list (example)

| Pin name | Basic example | Example of SPI unused | Example of SPI + I ² C | Example of UART + SPI + I ² C |
|----------|------------------------|------------------------|-----------------------------------|--|
| GPIO0 | WakeUp0 | WakeUp0 | WakeUp0 | WakeUp0 |
| GPIO1 | PWM0 | PWM0 | PWM0 | PWM0 |
| GPIO2 | PWM1 | PWM1 | PWM1 | PWM1 |
| GPIO3 | SPI-DOUT | PWM2 | PWM2 | SPI-DOUT |
| GPIO4 | SPI-DIN | ADC2 | PWM3 | SPI-DIN |
| GPIO5 | UART1-TX | UART1-TX | SPI-DOUT | UART1-TX |
| GPIO6 | UART1-RX | UART1-RX | SPI-DIN | UART1-RX |
| GPIO7 | SPI-SCS | UART1-RTSX | SPI-SCS | SPI-SCS |
| GPIO8 | SPI-SCLK | UART1-CTS _X | SPI-SCLK | SPI-SCLK |
| GPIO9 | ADC3 | ADC3 | ADC3 | ADC3 |
| GPIO10 | ADC4 | ADC4 | ADC4 | ADC4 |
| GPIO11 | I ² C-SCL | I ² C-SCL | I ² C-SCL | I ² C-SCL |
| GPIO12 | I ² C-SDA | I ² C-SDA | I ² C-SDA | I ² C-SDA |
| GPIO13 | UART1-RTSX | GPIO13 | GPIO13 | GPIO13 |
| GPIO14 | UART1-CTS _X | ADC5 | ADC5 | ADC5 |
| GPIO15 | WakeUp1 | WakeUp1 | WakeUp1 | WakeUp1 |
| GPIO25 | GPIO25 | GPIO25 | GPIO25 | GPIO25 |

Note: There are other functions than the above examples. About the detail of the other functions, refer to firmware specification.

2.4. Power Supply Pins

Table 2-4 shows the attributes and descriptions of power supply pins for normal operations.

Table 2-4 Power supply pins

| Pin name | Pin number | Attribute | Description |
|----------|------------|-----------------|--|
| | | Type VDD/GND | |
| | | | VDD / GND |
| VPGM | 5 | TEST — | Test pin Please connect VPGM to GND. |
| VBAT | 18 | VBAT VDD | Power supply pin for DCDC and sleep circuit. Connect the external power source for DCDC and LDO built into the IC. |
| LX | 19 | VBAT VDD | DCDC output pin. Please connect to external inductor for DCDC. |
| VDDCORE1 | 14 | — VDD | DCDC for feedback input, analog circuit power supply pin. Please connect to external inductor for DCDC. |
| VDDCORE2 | 15 | — VDD | DCDC for feedback input, digital circuit power supply pin. Please connect to external inductor for DCDC. |
| VDDIO1 | 1 | VDDIO | IO power supply. |
| VDDIO2 | 23 | VDD | Power supply pin for GPIO. |
| VSSA | 8 | Analog GND | GND pin for analog, this pin needs to be connected to GND. |
| VSSRFIO | 6 | Analog GND | GND pin for RFIO, this pin needs to be connected to GND. |
| VSSX | 13 | Analog GND | GND pin for OSC, this pin needs to be connected to GND. |
| VSSDC | 20 | Digital GND | GND pin for DCDC, this pin needs to be connected to GND. |
| VSSD1 | 27 | Analog, Digital | GND pin for analog, digital common, this pin needs to be connected to GND. Connect the exposed Die Pad to GND because this pad is digital ground as well. |
| VSSD2 | FIN | GND | |

3. System Configuration

3.1. Block Diagram

Figure 3-1 shows block diagram of TC35679.

TC35679 is powered by single voltage between 1.8 V and 3.6 V (operating temperature range: -40 to 85°C).

The chip has built-in DCDC and LDO requiring external capacitors.

It uses 26 MHz reference clock and 32.768 kHz sleep clock.

External memory Interface is SPI or I²C, and host CPU interface is UART.

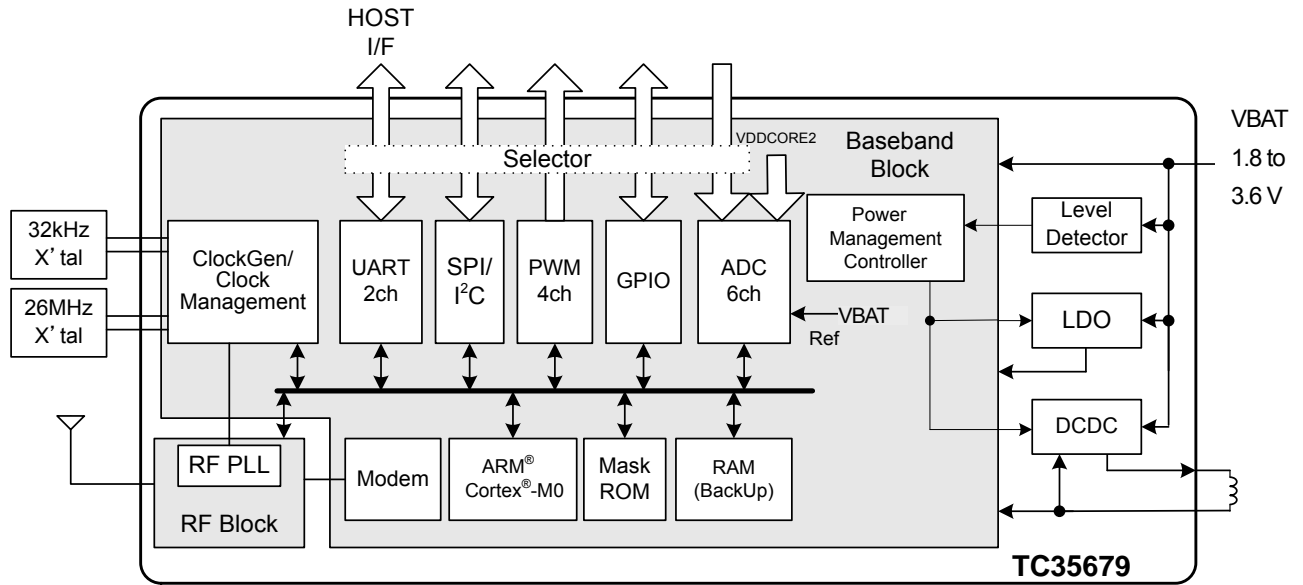


Figure 3-1 Example of the TC35679 internal block diagram and the peripheral components connection diagram

4. Functional Specifications

4.1. Bluetooth® Function

The Bluetooth® function is realized by using the hardware which is configured with RF analog and baseband, and the software on a mask ROM. Only connecting a crystal oscillator and some discrete parts externally, the Bluetooth® wireless communication can work.

4.1.1. Supported Function

This function is compliant with Bluetooth® V4.2 low energy standard. Main supported functions are shown below.

Table 4-1 List of supported functions

| Items | Description | Notes |
|-----------------|---|------------------|
| Bluetooth® Core | 4.2 | LE is supported. |
| v4.0 features | Central | Supported |
| | Peripheral | Supported |
| | Multi Profile/point | Supported |
| | Connection Update | Supported |
| | Random Address | Supported |
| | WhiteList | Supported |
| | Security Property (Just Works) | Supported |
| | Security Property (PassKey Entry) | Supported |
| | Security Property (OOB) | Supported |
| | Security Property (Numeric Comparison) | Supported |
| | GATT-Client | Supported |
| | GATT-Server | Supported |
| | Broadcaster | Supported |
| | Observer | Supported |
| v4.1 features | Low Duty Cycle Directed Advertising | Supported |
| | 32-bit UUID support in LE | Supported |
| | LE L2CAP Connection Oriented Channel Support | Supported |
| | LE Privacy v1.1 | Supported |
| | Connection Parameter Request Procedure | Supported |
| | Extended Reject Indication | Supported |
| | Slave-initiated Features Exchange | Supported |
| | LE Ping | Supported |
| | Act as LE Master and LE Slave at the same time | Supported |
| | Act as LE Slave to more than one LE Master at the same time | Supported |
| v4.2 features | LE Data Packet Length Extension | Supported |
| | LE Secure Connections | Supported |
| | Link Layer Privacy | Supported |
| | Link Layer Extended Scanner Filter Policies | Supported |

4.1.2. Support Protocol Layer

Following figure shows the Bluetooth Protocol and Profile Layer supported.

It has RF control, Link layer, internal HCI, L2CAP, ATT, SMP and GATT.

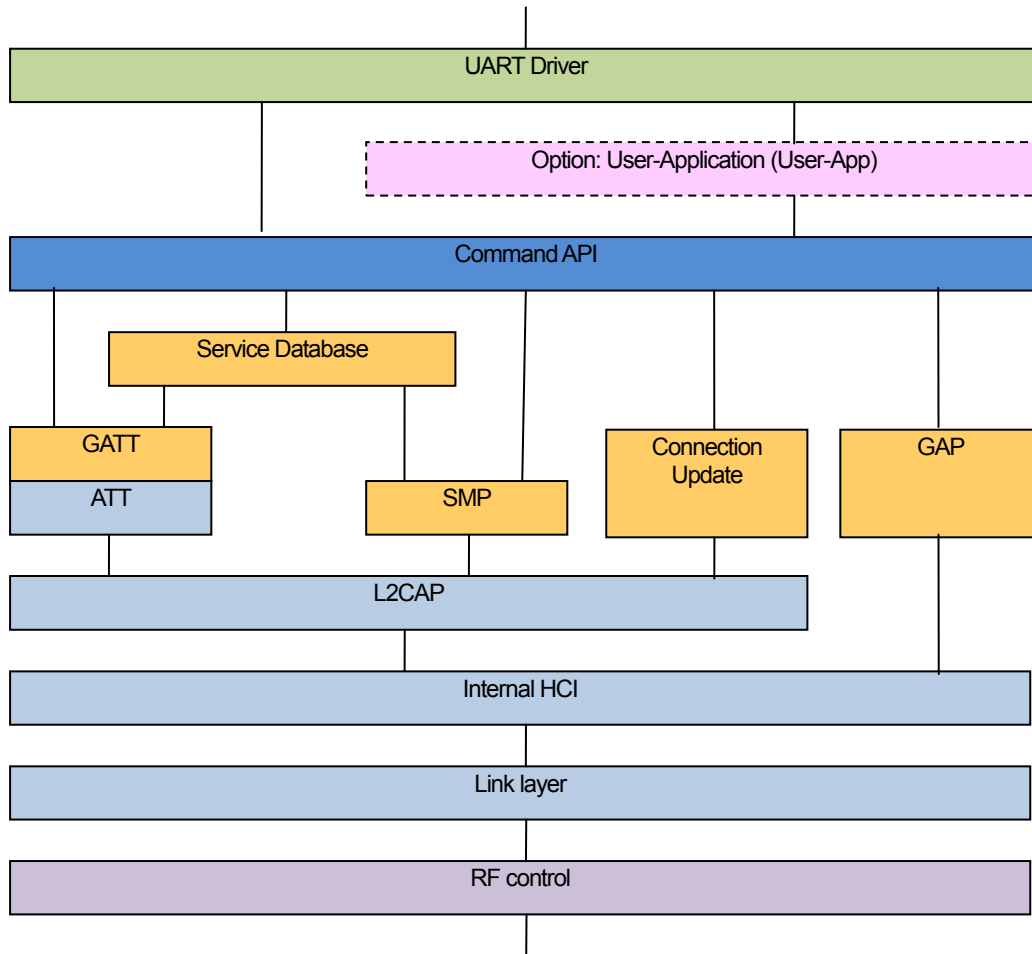


Figure 4-1 Protocol Layer

4.1.3. RF

Since the RF analog part of TC35679 builds in not only transmission and reception circuits but also the RF switch and the matching circuit, the RFIO pin which is a single I/O does not need an external matching circuit. The wireless device which suits for RF-PHY specifications of Bluetooth low energy can be realized easily by connecting to 50 Ω wiring.

The transmission power can be selected from intended power between 0 and -20 dBm (4 dB steps). Not only default transmission power but also transmission power to the specified destination can be set. The RSSI of reception block has an accuracy of ± 2 dB (typ.) to the input signal between -90 and -10 dBm.

4.1.4. Auto Advertise Function

Using an auto advertise function enables repeating transmissions of advertise packets with very small power. The auto advertise function is a function which transmits intended advertise packets without waking CPU up in Backup mode. Then, a scan request and a connection request can be also received. The response to the remote device can be preset in case of receiving a scan request, and when one connection request is received, this function wakes CPU up and leaves a subsequent process to the user software.

4.2. Reset Interface (Power up sequence)

4.2.1. Features

Reset interface has the following features.

- 1.8 to 3.6 V operation (Operating temperature range : -40 to 85°C)
- Level sensitive asynchronous reset (Low level: reset)

When the power supply is applied, the external reset signal connected to the TC35679 should be held the reset state (RESETX = Low). Please release the reset (RESETX = High) after the power supply voltage reaches 1.8 V or more and becomes stable.

Then, the oscillation of a crystal oscillator is started, and the internal reset is released by the internal timer after the oscillation-stable time of the crystal oscillator is passed.

4.2.2. Connection Example

Figure 4-2 shows connection example where TC35679 is powered through RC time constant circuit.

Reset signal can be given from power supply through RC time constant circuit, or can be connected with an IC which has asynchronous and level sensitive reset function. Figure 4-3 shows the timings to reset and reset-release for the power supply.

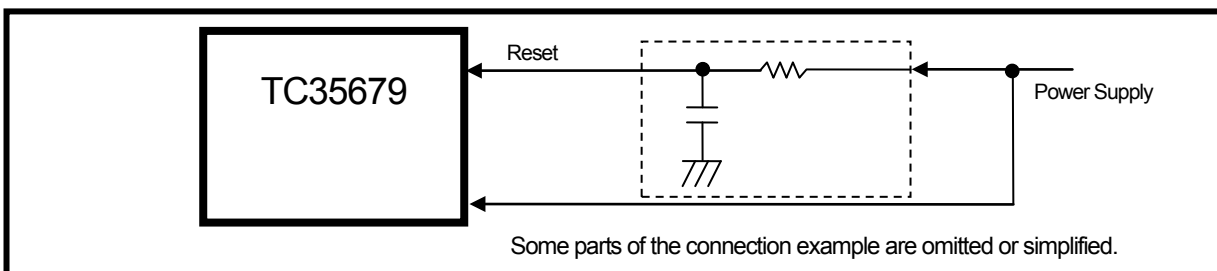


Figure 4-2 Reset signal connection example

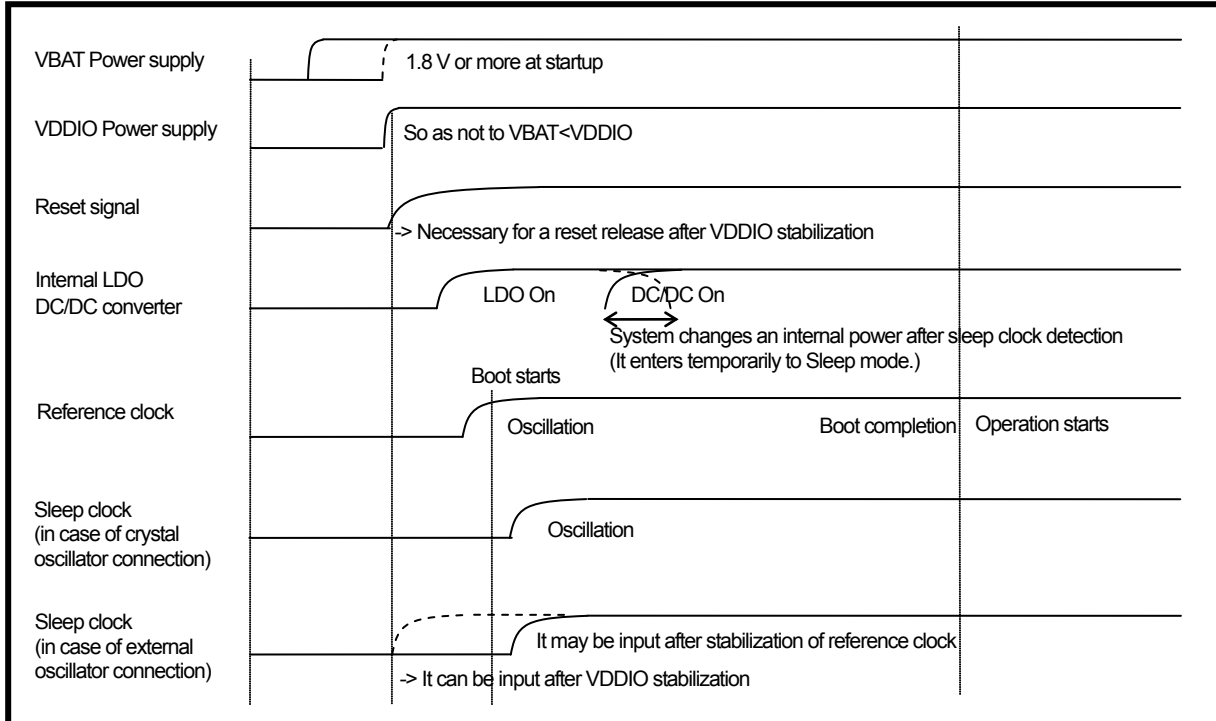


Figure 4-3 Power-on reset release sequence

4.3. UART Interface

4.3.1. Features

TC35679 UART interface has the following features.

- 1.8 to 3.6 V operation (Operating temperature range : -40 to 85°C)
- Full-duplex four-wire start-stop synchronization data transfer (Reception data, Transmission data, Reception flow control, and Transmission flow control)
- Selectable between 2-line start-stop synchronous transfer (Reception data and Transmission data) and 4-line start-stop synchronous transfer (Reception data, Transmission data, Reception flow control, and Transmission flow control)
- Start bit field (1 bit), data bit field (8 bits, LSB first), stop bit field (1 bit), no parity bit
- UART transmit and receive data pins can be switched by the command of HCI mode. (UART2 function)
- Programmable baud rate: 9600 bps to 921.6 kbps.
- 3 (or more) character interval should be inserted between one transmission message and another transmission message. The length of the interval can be changed by a command.
- Error detection (Reception character timeout, Reception overrun error, Reception framing error)
- Host wake up function

TC35679 communicates commands, status, and data with a host CPU through UART interfaces. The UART interfaces are shared with GPIO pins, and during boot process after a reset, TC35679 firmware assigns UART functions to the GPIOs. The UART interfaces can operate at 1.8 to 3.6 V (operating temperature range : -40 to 85°C) depending on the VDDIO power supply voltage. Because the power supply pin is shared with UART interface and the other hardware interfaces, UART interface cannot operate at a different voltage from the others.

4.3.2. Connection Example

TC35679 UART can be connected with an UART interface on a host CPU. Figure 4-4 shows an example of two-wire start-stop synchronization data transfer connection with an external host CPU. The timing chart to assign the GPIO pins to the UART function is shown in Figure 4-5.

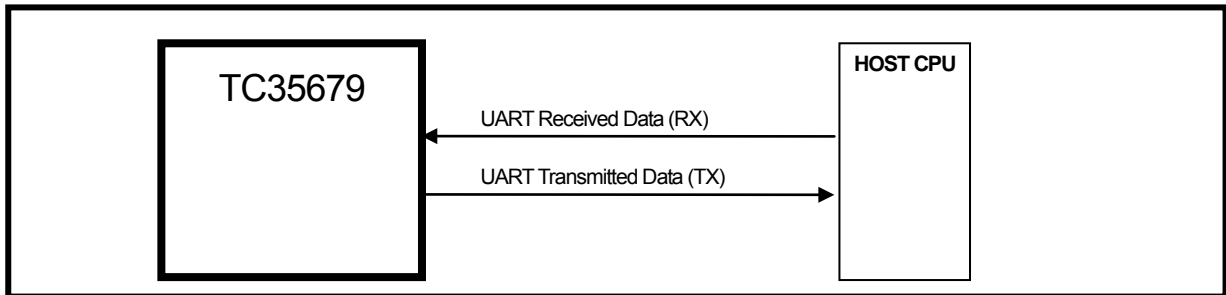


Figure 4-4 UART connection example

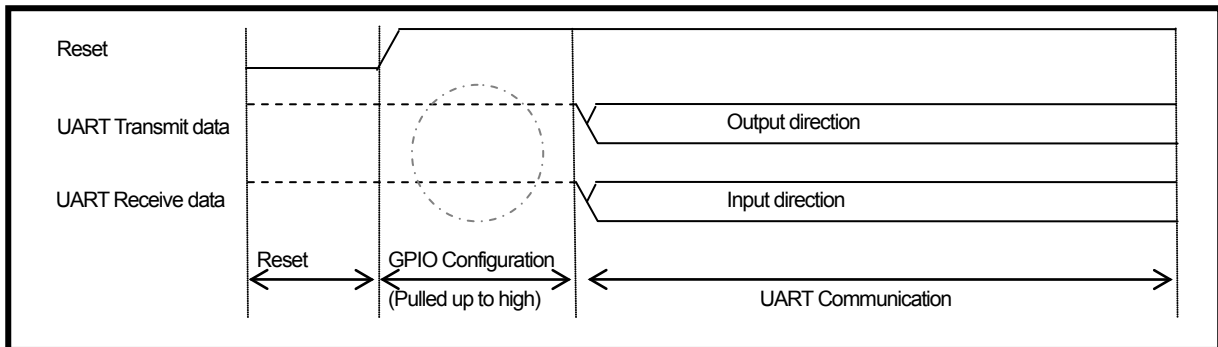


Figure 4-5 Timing for UART function assignment

4.3.3. Frame Format

TC35679 supports the following format:

- Number of data bits: 8 bits (LSB first)
- Parity bit: no parity
- Stop bit: 1 stop bit
- Flow control: RTSX/CTSX

Figure 4-6 shows UART data frame.

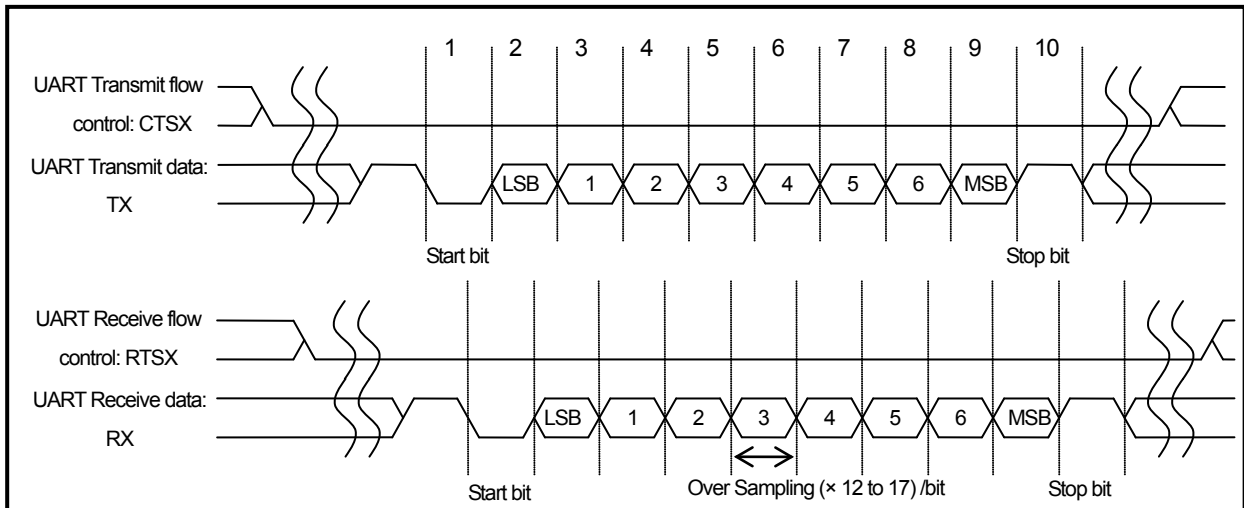


Figure 4-6 UART data frame

4.3.4. Flow Control Function

Hardware flow control is available when TC35679 UART interface is assigned to GPIO5 to GPIO8 (GPIO5, 6, 13, 14) as four-wire start-stop synchronization data transfer. Transmit flow control (CTS_X) and receive flow control (RTS_X). Figure 4-7 shows signals input and output direction.

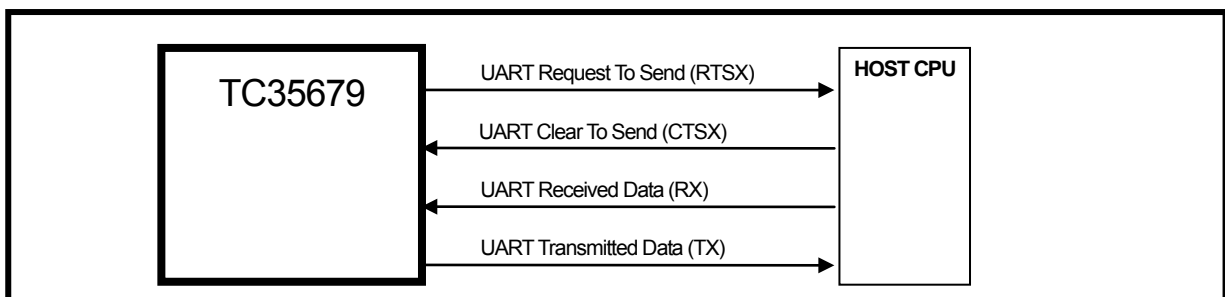


Figure 4-7 UART connection example

CTS_X (Clear to Send) input signal is used for UART transmitting. Low input indicates the peer device (for example, the host in the Figure 4-7) is ready to receive data, and TC35679 sends data if it has data to transmit. On the other hand, TC35679 stops transmitting on the basis of UART unit frame when CTS_X input is high.

RTS_X (Request to Send) output signal is used for UART receiving. Low output indicates TC35679 is ready to receive data and requests data to the peer device. TC35679 outputs RTS_X low when ready to receive data. When the UART becomes busy and cannot receive data, TC35679 outputs RTS_X high, and stops UART communication on the basis of UART unit frame.

Response time of UART transmitting and receiving to flow control signals is between 1 frame to 4 frames depending on the baud rate and internal process status of frame.

4.3.5. UART Baud Rate Setting

TC35679 UART interface has a programmable baud rate setting function. The UART baud rate is generated from 26 MHz clock, and can be set according to the following equation depending on over sampling number and dividing ratio.

$$UARTBaudRate = \frac{BaudRate\ Generating\ Clock\ Frequency}{Over\ Sampling\ Number \times Dividing\ Ratio}$$

Table 4-2 shows examples of UART Baud rate settings. If other target baud rates are required, please contact our engineering department.

Table 4-2 UART Baud rate settings

| Target baud rate [bps] | Actual baud rate [bps] | Over sampling rate | Frequency dividing ratio |
|---------------------------|---------------------------|--------------------|-----------------------------|
| 9600 | 9587.021 | 12 | 226 |
| 14400 | 14396.46 | 14 | 129 |
| 19200 | 19174.04 | 12 | 113 |
| 28800 | 28856.83 | 17 | 53 |
| 38400 | 38461.54 | 13 | 52 |
| 57600 | 57777.78 | 15 | 30 |
| 76800 | 76923.08 | 13 | 26 |
| 115200 | 115555.6 | 15 | 15 |
| 153600 | 153846.15 | 13 | 13 |
| 230400 | 232142.9 | 16 | 7 |
| 307200 | 305882.4 | 17 | 5 |
| 460800 | 464285.7 | 14 | 4 |
| 921600 | 928571.4 | 14 | 2 |

Note: Error of target baud rate and the actual baud rate is to be set to within 1 %.

4.3.6. TX message spacing function

TC35679 spaces more than 12 time frames between different TX messages making less than 12 time frames between TX frames in a TX message when several TX frames belong to one TX message. Host CPU is able to know the boundaries between TX messages by measuring time frames between TX frames.

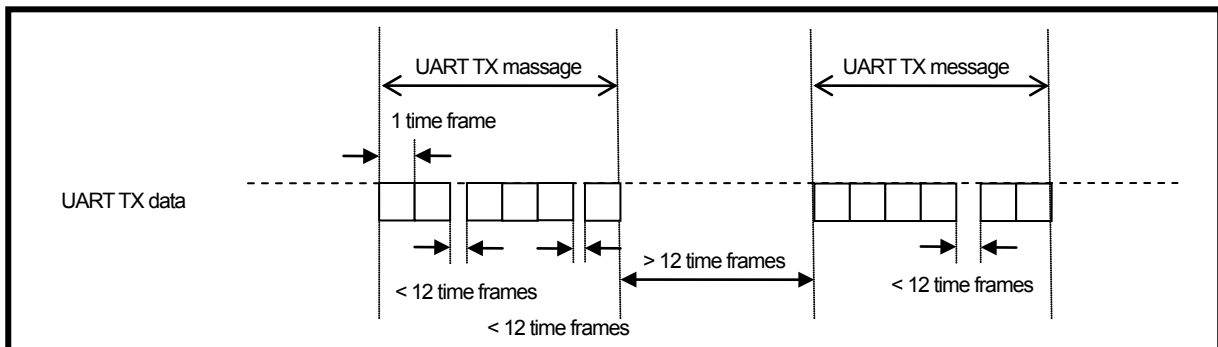


Figure 4-8 TX frames and TX messages

4.3.7. Error Detecting Functions

TC35679 UART interface has 3 kinds of error detecting functions.

- Receiver timeout error
- Receiver over run error
- Receiver frame error

Receiver timeout error detection judges an error if an UART RX message made from several RX frames has an RX frame interval longer than a certain value. The interval is counted by internal timer. Keep the interval between RX frames less than 12 time frames that belong to an RX message. For UART1, keep intervals between different RX messages more than 12 time frames. For example, 115200 bps has 0.087 ms for 1 frame, the interval between RX messages should be longer than $0.087 \text{ ms} \times 12 = 1.04 \text{ ms}$. RX messages that has intervals less than 12 time frames gives an error because TC35679 sees them as one UART RX message. Interval of the received frame is the default in the 12 time frame, but it can be changed by the command.

In the case of UART2, of different UART receive message interval is more than 14 ms.

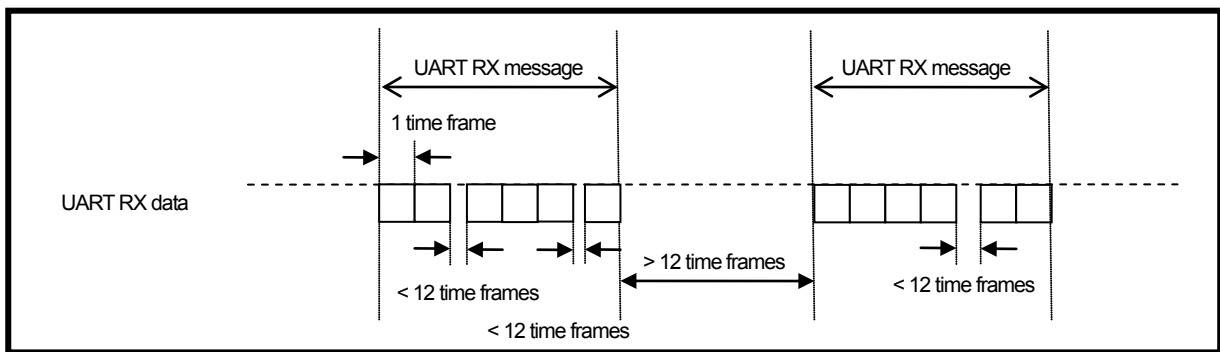


Figure 4-9 RX frames and RX messages

Receiver over run error judges if UART receive frame buffer internal TC35679 is overflowed. Normally, this overflow does not happen when the flow control mentioned in 4.2.4 is activated for data communication.

Receiver frame error judges if failing recognize the unit frame. A frame formation is judged as failure when its start bit is detected and the corresponding stop bit is detected as "0".

4.3.8. Host Wake up Function

TC35679 can wakes up its host before sending UART data to the host. This function is disabled by default, but can be assigned to GPIO by command. Host wake up time can be changed by command (10 ms by default).

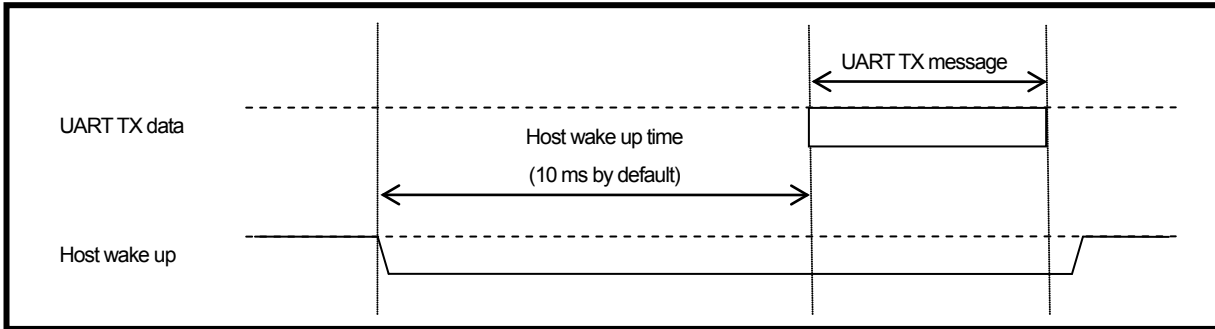


Figure 4-10 Host wake up

4.3.9. HCI mode

When TC35679 is used in the HCI mode, UART is the host interface to receive HCI commands.

The Bluetooth[®] wireless performance can be tested in HCI mode by the measurement equipment which connects the UART directly.

4.3.9.1. HCI Reset

To process the following commands successfully, it is needed that the host waits at least 150 μ s from the command complete event after sending a HCI reset command.

4.4. SPI Interface

4.4.1. Features

TC35679 has the following main features for a serial memory interface

- Operation voltage: 1.8 to 3.6 V (Operating temperature range : -40 to 85°C)
- SPI interface
 - Chip select: 1 ch
 - Chip select polarity: Selectable: High-active and Low-active
 - Serial clock master operation: Polarity and phase are adjustable (4 combinations are selectable)
 - Serial clock frequency: 25 Hz to 6.5 MHz
 - Serial data transfer mode: MSB-first, LSB-first

SPI interface can operate at 1.8 to 3.6 V (operating temperature range : -40 to 85°C) depending on VDDIO, however, because the power supply pin is shared with SPI interface and the other hardware interfaces, SPI interface cannot operate at a different voltage from the others.

4.4.2. Connection Example

TC35679 SPI interface can be connected to serial EEPROMs and serial Flash-ROMs and has 1 chip select port. Figure 4-11 shows a connection example, where a serial Flash-ROM is connected to TC35679 SPI interface.

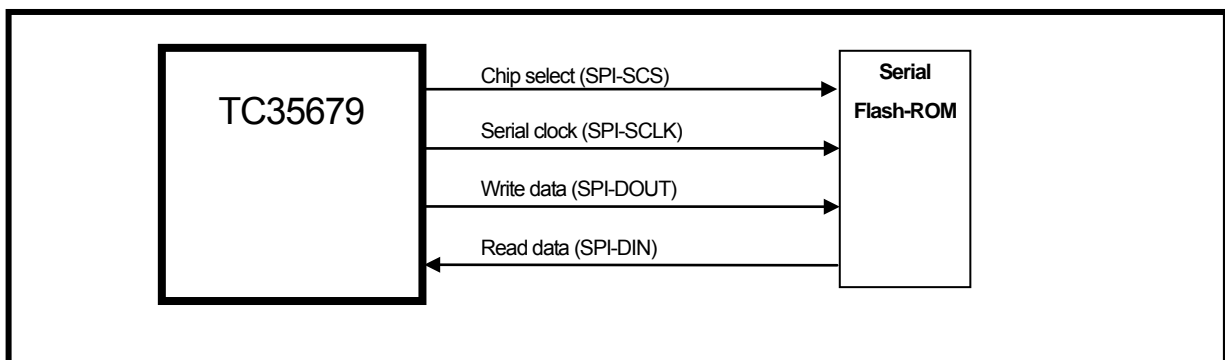


Figure 4-11 Connection example for serial Flash-ROM using SPI interface

4.4.3. Frame Format

When the SPI interface is connected to external ICs, the first 8 bit (X7 to X0) specifies the address and read or write mode. The command recognition code type and the address bit width should be determined by the external IC in use. For more information in detail, please refer to the technical documents for the external IC.

Figure 4-12 shows an example where 8-bit address is written and then 8-bit data is read. Figure 4-13 shows an example where 8-bit address is written and then 8-bit data is written.

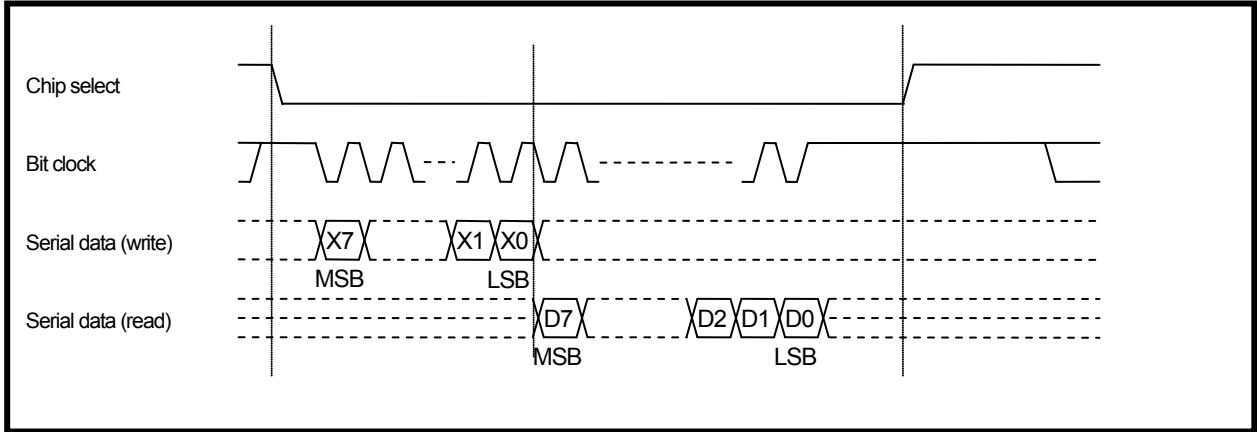


Figure 4-12 SPI format (single byte read)

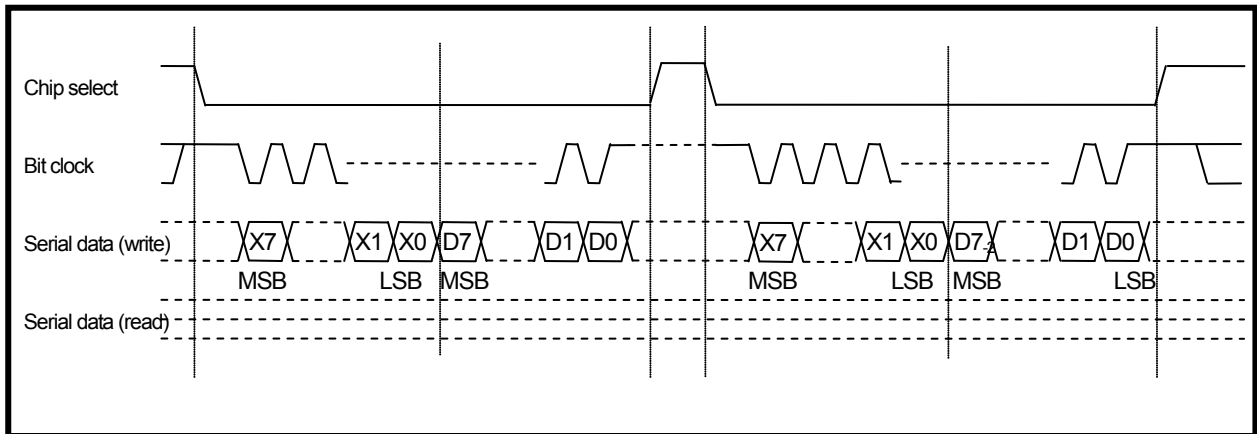


Figure 4-13 SPI format (single byte write)

4.5. I²C Interface

4.5.1. Features

TC35679 has the following main features for a serial memory interface.

- Operation voltage: 1.8 to 3.6 V (Operating temperature range : -40 to 85°C)
- I²C interface
 - Operation mode: I²C bus master
 - Serial clock (I²C-SCL) frequency: Standard mode (Max 100 kHz), Fast mode (Min 100 kHz to Max 400 kHz)
 - Output mode: Open-drain output, CMOS output
 - Device address format: 7 bits address (10 bits address is not supported)

I²C interface can operate at 1.8 to 3.6 V (operating temperature range : -40 to 85°C) depending on VDDIO, however, because the power supply pin is shared with I²C interface and the other hardware interfaces, I²C interface cannot operate at a different voltage from the others.

4.5.2. Connection Example

Figure 4-14 shows a connection example of a serial EEPROM using I²C bus interface of the open-drain mode. External pull-up resistors (Rext) are necessary for both serial clock line and serial data line.

Figure 4-15 shows another connection example where I²C bus is in the CMOS output mode. Only the serial data line needs Rext because this line can be driven by neither TC35679 nor a serial EEPROM.

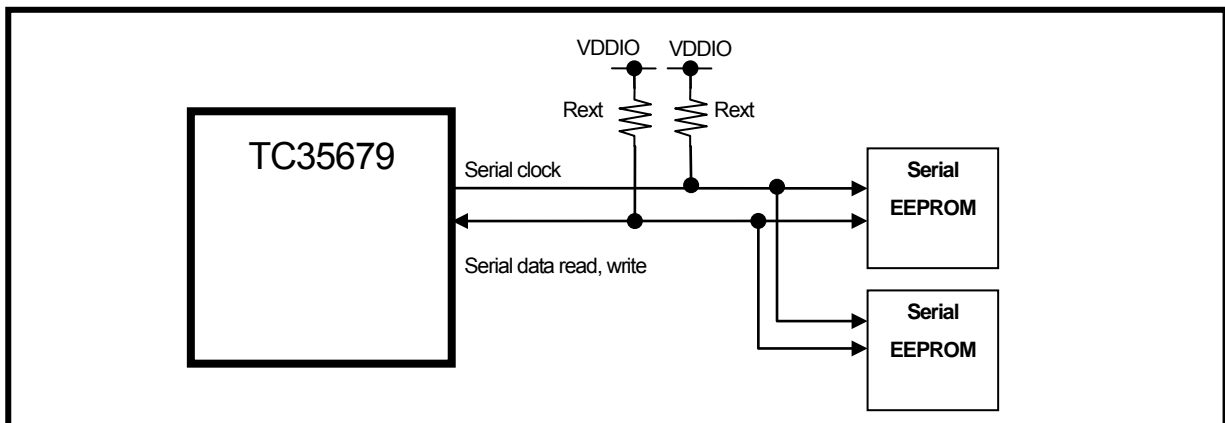


Figure 4-14 Connection example for serial EEPROM with I²C-bus interface (Open-drain output)

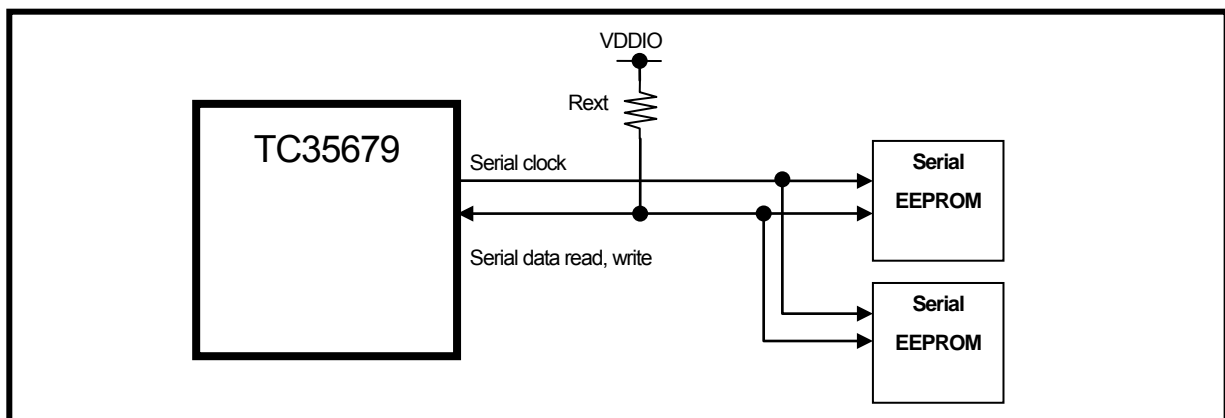


Figure 4-15 Connection example for serial EEPROM with I²C-bus interface (CMOS output)

4.5.3. Selection of External Pull-up Resistor Value

An external pull-up resistor value needs to be selected by the following equations in case of I²C bus interface. Its maximum value is defined by equation (1), in which t_r is rise time of serial clock and data and C_b is I²C bus capacity. Its minimum value is defined by equation (2), in which VDDIO is a supply voltage for TC35679, V_{ol_max} is the maximum value of low level output voltage, and I_{ol} is the low level output current. Please set the pull-up resistor value between these lower and upper limits.

$$R_{\text{ext_max}} = \frac{t_r}{0.8473 \times C_b} \quad (1)$$

$$R_{\text{ext_min}} = \frac{VDDIO - V_{ol_max}}{I_{ol}} \quad (2)$$

TC35679 supports I²C bus standard mode (Max 100 kHz) and I²C bus fast mode (Min 100 kHz to Max 400 kHz). The rise time t_r is 1000 ns for the standard mode and it is 300 ns for the fast mode. C_b can vary depending on the IC board and how it is implemented. Table 4-3 and Table 4-4 show examples when I²C bus capacity is 20 pF.

Table 4-3 External pull-up resistor value for I²C standard mode (Cb = 20 pF)

| I ² C bus frequency | Max 100 kHz | | | | | | | | |
|--------------------------------|-------------|------|------|------|------|------|------|------|------|
| tr [ns] | 1000 | | | | | | | | |
| Cb [pF] | 20 | | | | | | | | |
| VDDIO [V] | 1.8 | | | 3.0 | | | 3.6 | | |
| Vol_max [V] | 0.3 | | | 0.4 | | | 0.4 | | |
| Iol [mA] | 1 | 2 | 4 | 1 | 2 | 4 | 1 | 2 | 4 |
| Rext_min [kΩ] | 1.50 | 0.75 | 0.38 | 2.60 | 1.30 | 0.65 | 3.20 | 1.60 | 0.80 |
| Rext_max [kΩ] | 59.01 | | | | | | | | |

Table 4-4 External pull-up resistor value for I²C fast mode (Cb = 20 pF)

| I ² C bus frequency | Min 100 to Max 400 kHz | | | | | | | | |
|--------------------------------|------------------------|------|------|------|------|------|------|------|------|
| tr [ns] | 300 | | | | | | | | |
| Cb [pF] | 20 | | | | | | | | |
| VDDIO [V] | 1.8 | | | 3.0 | | | 3.6 | | |
| Vol_max [V] | 0.3 | | | 0.4 | | | 0.4 | | |
| Iol [mA] | 1 | 2 | 4 | 1 | 2 | 4 | 1 | 2 | 4 |
| Rext_min [kΩ] | 1.50 | 0.75 | 0.38 | 2.60 | 1.30 | 0.65 | 3.20 | 1.60 | 0.80 |
| Rext_max [kΩ] | 17.70 | | | | | | | | |

4.5.4. Frame Format

For I²C format, TC35679 first generates start condition. Then, it sends device recognition address (7 bit: [A6:A0]) and the first byte address ([B7:B0]) for the access target. Next, it goes for read or write sequence. For I²C, every data is sent as MSB first. How to specify the value and byte address of the device identification address, and it has been determined in accordance with the device to be connected. In order to be connected, it must match the device to be connected. For read operation, TC35679 returns to the serial memory either receive acknowledge bit (ACK) or receive not acknowledge bit (NACK) every time it receives one byte. For write operation, TC35679 receives either ACK or NACK from the serial memory every time it sends one byte. It can handle not only one byte but also several bytes in a row. TC35679 generates stop condition when it has finished all the read or write of data.

Figure 4-16 shows an example where TC35679 reads two-byte data. Figure 4-17 shows an example where TC35679 writes two-byte data. In these examples, gray texts and lines indicate signals that are given by the serial memory. For read operation, after having read the final byte data, TC35679 returns NACK with which the serial memory gets to know the completion of the read operation.

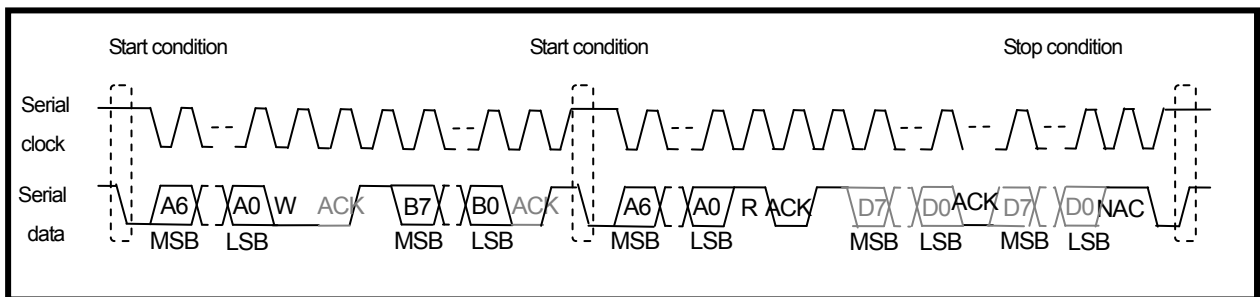


Figure 4-16 I²C format (Serial memory, read)

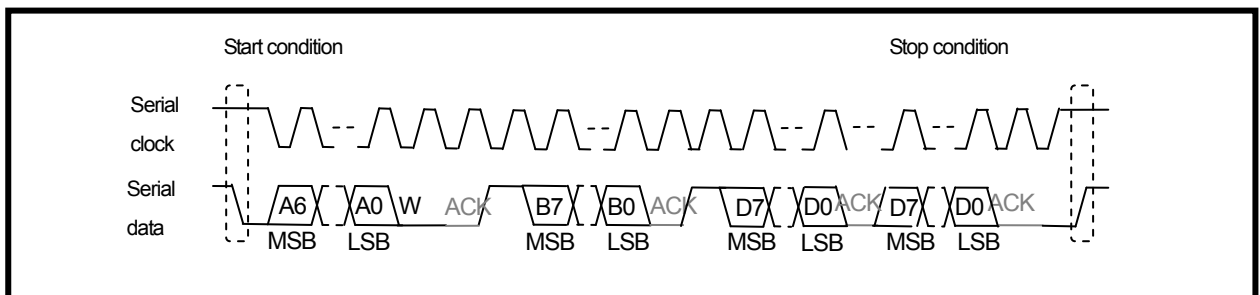


Figure 4-17 I²C format (Serial memory, write)

4.6. PWM Interface

TC35679 has a PWM interface that can be used for LED, buzzer control, etc.

The PWM interface has the following features.

- Arbitrary pulse generation function
- It can select the source clock from 13 MHz and 32.768 kHz
- It has 12 bits clock division setting up to 1/4096 8 Hz to 16.384 kHz (32.768 kHz), 3.17 kHz to 6.5 MHz (13 MHz)
- The pulse output can be masked by the regular pattern which period is one second with 50 ms unit width (rhythm function)
- The interrupt can be generated in synchronization with the cycle of 1 s rhythm pattern.
- It can switch the pulse output to Low / High active
- Duty of the pulse output is adjustable.

4.6.1. Pulse Generation Function

Figure 4-18 shows a brief explanation of the pulse generation. TC35679 can adjust output pulse frequency by changing its cycle. Also it can adjust on/off ratio by changing its duty.

The frequency (cycle) can be set from 8 Hz to 16.384 kHz for 32.768 kHz clock, and from 3.17 kHz to 6.5 MHz for 13 MHz clock.

The duty can be set from 0 % to 100 %.

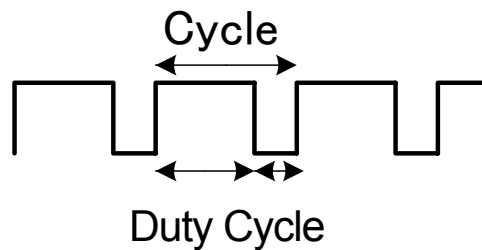


Figure 4-18 PWM pulse generation function

4.6.2. Rhythm Function (Output Masking)

Figure 4-19 shows the brief explanation of PWM rhythm function. In addition to the one for pulse generation, TC35679 has another timer that has $50\text{ ms} \times 20 = 1\text{ s}$ (rhythm counter). That timer has 20 bits register (pattern register), each bit corresponds to the rhythm counter that counts down in every 50 ms. When the pattern register is zero, the PWM output is masked to zero or one. Using this function, LED or buzzer can be on with 1 s periodical pattern.

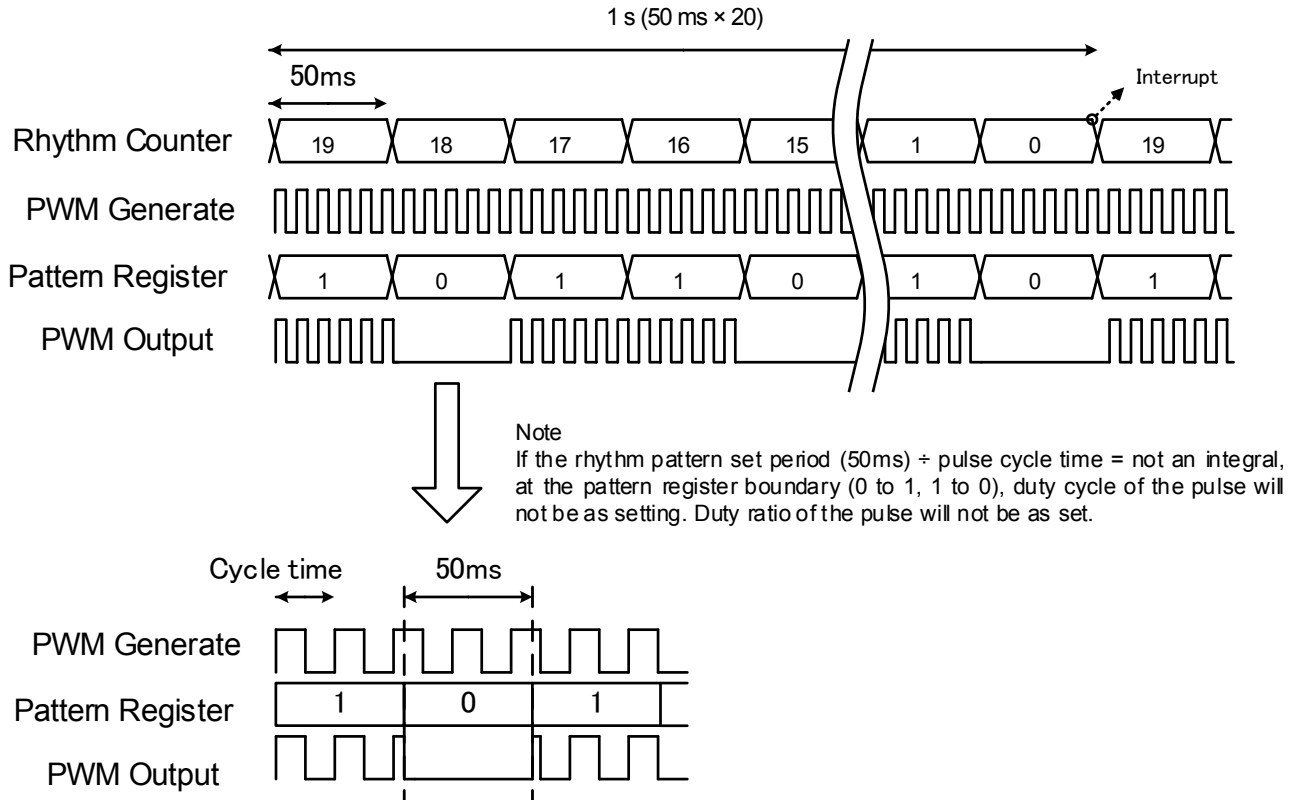


Figure 4-19 PWM Rhythm Function

4.7. ADC

4.7.1. Features

TC35679 has 6 ch of 10 bits ADCs for battery monitoring, analog inputs from external sensors, for example. The ADC has the following features.

- 5 ch for analog inputs (shared with GPIO pins)
- 1 ch for VBAT voltage monitor

Note: The reference input is internally connected to VBAT, and the analog input is to built-in VDDCORE2 output.

Please refer to 4.7.2 for how to calculate voltage value.

- Maximum conversion rate: 1 MS/s

4.7.2. Descriptions

The ADC has 10 bits conversion accuracy and can work for input voltages from 0 V to 3.6 V (VBAT). It has 6 ch of analog inputs, and the ch0 is connected to VDDCORE2 output, and the ch1 to ch5 are shared with GPIO pins.

When a battery is used as power source, the reference voltage can slide over time because the battery is connected as reference voltage. In that case, the VDDCORE2 output voltage connected to ch0 can be used as a reference voltage. The input voltage to ch1 to ch5 is converted by the reference voltage of ch0 and the converted value is used to calculate a correct digital value by the CPU. The following shows the conversion method of the input voltage.

Voltage A at time T can be calculated as follows

- (1) VDDCORE2 output voltage (VDDCORE2) on Ch0 should be converted by the ADC. The converted digital value is X.
- (2) The analog signal on Ch1 is converted and the converted digital value is Y.
- (3) When the absolute value of the analog signal on Ch1 is defined as A (V), $VDDCORE2 (V) / A (V) = X / Y$. So,

$$A (V) = VDDCORE2 (V) \times Y / X$$

Calculation example:

Suppose ch0 (for ex. VDDCORE2 output is 1.1 V) is converted to 0x0134, and ch1 (measurement target) is converted to 0x0188, the absolute voltage at ch1 A (V) is given by $1.1 \times 0x0188 / 0x0134 = 1.1 \times 392 / 308 = 1.4 (V)$.

Figure 4-20 shows conceptual of voltage conversion.

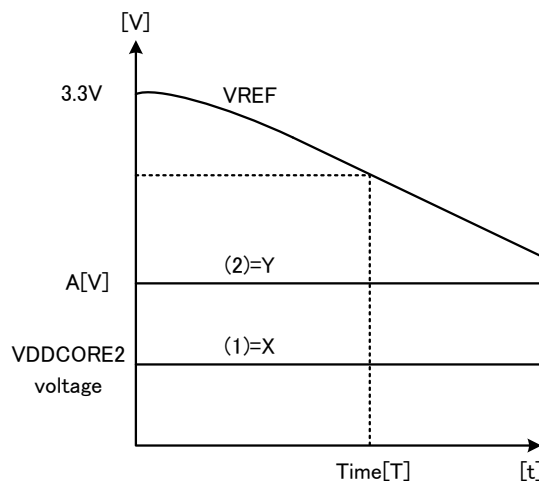


Figure 4-20 Voltage conversion concept

The ADC converts input voltage of ch selected by register settings. When a conversion has finished, the CPU detects it by the interrupt or register polling, and then reads the conversion results. The maximum sampling rate depends on software load on the CPU.

Note: The numerical values are expressed as follows.

Hexadecimal number: 0xABC

4.8. IC Reference Clock Interface

4.8.1. Features

TC35679 has the following features for IC reference clock interface.

- Clock frequency: 26 MHz (please adjust the accuracy to < 50 ppm at the temperature in use)

TC35679 doesn't require external feedback resistors and load capacitor because it has an internal feedback resistor and capacitor array between XOIN and XOOUT. Please adjust capacitor array based on PCB layout and assembly if necessary within the range of the crystal's specification.

4.8.2. Crystal oscillator connection example

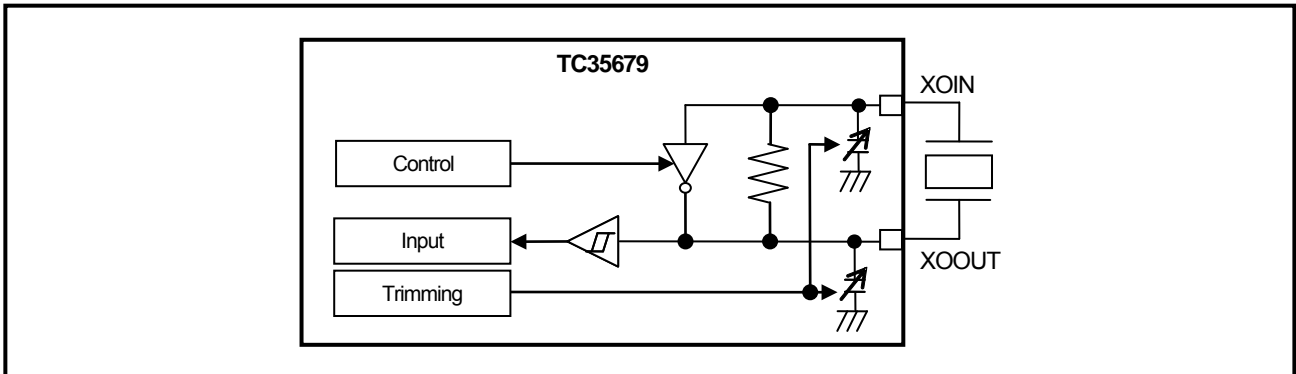


Figure 4-21 Crystal oscillator connection example

4.9. Sleep Clock Interface

TC35679 has the following features for sleep clock interface.

- Crystal oscillator can be connected.
- Clock frequency: 32.768 kHz (please adjust the frequency accuracy to < 500 ppm at the temperature in use)

Crystal oscillator is connected between SLPXOIN pin and SLPXOOUT pin. TC35679 doesn't require external feedback resistors and load capacitor because it has an internal feedback resistor and capacitor array between SLPXOIN pin and SLPXOOUT pin. Please adjust capacitor array based on PCB layout and assembly if necessary within the range of the crystal's specification. When an external oscillator is connected, connect it to SLPXOIN and SLPXOOUT should be connected to the GND. When oscillator is not used and do not supply a clock from the outside, these pins need to be connected to the GND.

4.9.1. Crystal oscillator connection example

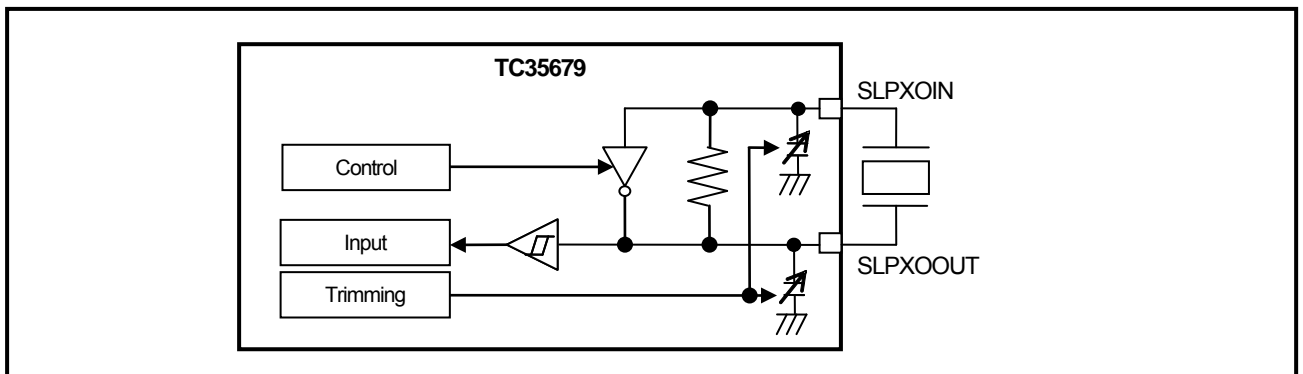


Figure 4-22 Crystal oscillator connection example

4.9.2. External oscillator connection example

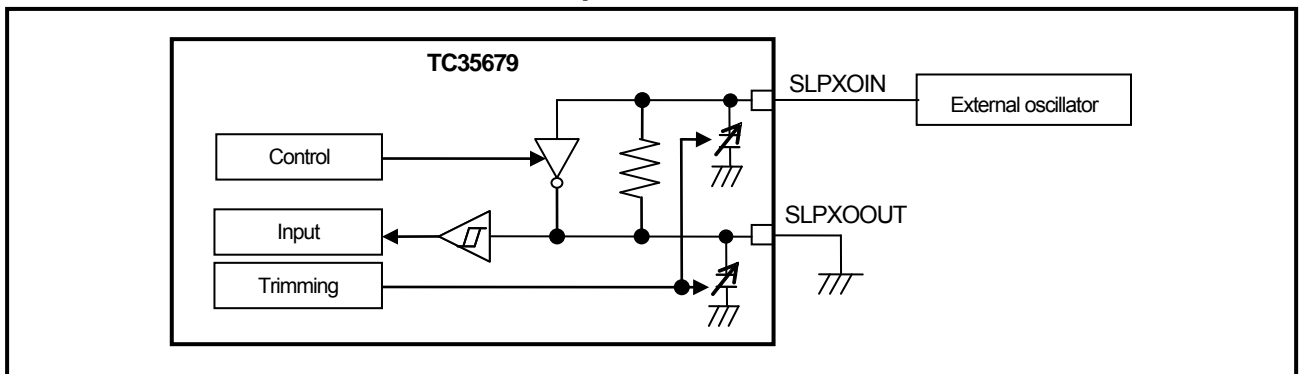


Figure 4-23 External oscillator connection example

5. Electric Characteristics

5.1. Absolute Maximum Ratings

Absolute maximum ratings must not be exceeded even for a moment. Voltages, currents, and temperatures that exceed the absolute maximum ratings can cause break-downs, degradations, and damages not only for ICs but also for other components and boards. Please make sure application designs not to exceed the absolute maximum ratings in any situation.

Table 5-1 Absolute maximum ratings
(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V)

| Items | Symbols (Power supply system) | Ratings | | Unit |
|-----------------------|-------------------------------|---------|---------------------|------|
| | | Min | Max | |
| Power supply | VBAT VDDIO (Note1) | -0.3 | +3.9 | V |
| Input voltage | V _{IN} | -0.3 | VDDIO + 0.3 (Note2) | V |
| Output voltage | V _{OUT} | -0.3 | VDDIO + 0.3 (Note2) | V |
| I/O pin Input current | I _{IN} | -10 | +10 | mA |
| Input power | RFIO | — | +6 | dBm |
| Storage temperature | T _{stg} | -40 | +125 | °C |

Note1: It is not supposed that VBAT is grounded while VDDIO is supplied. It can trigger current path from VDDIO to VBAT through internal circuitry, and may cause degradations and break-downs.

Note2: Keep $VDDIO + 0.3\text{ V} < 3.9\text{ V}$.

5.2. Operating Conditions

TC35679 can operate normally with proven quality under the operating ranges. Any diversion from the operating ranges may cause false operation. Thus, please make sure application design to comply these operating ranges.

Table 5-2 Operating conditions

(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V, Operating ambient temperature range: Ta=-40 to +85°C)

| Items | | Symbols (Pin names, conditions) | Ratings | | | Unit |
|-------------------|--------------------------------|---------------------------------------|-----------|----------------------|-----------|------|
| | | | Min | Typ. | Max | |
| Power supply | VBAT Operating Voltage1(Note1) | VBATopr1 | 1.80 | 3.00 | 3.60 | V |
| | VDDIO Operating Voltage(Note2) | VDDIOopr | 1.80 | 3.00 | 3.60 | V |
| | VDDCORE Voltage(Note2) | VDDCORE1/ VDDCORE2 | — | 1.1 / 1.2 (Note3) | — | V |
| RF frequency | | Fc | 2400 | — | 2483.5 | MHz |
| Clock frequencies | | Reference clock Fck | 25.99870 | 26.00000 | 26.00130 | MHz |
| | | Sleep clock fslclk | 32.751616 | 32.768000 | 32.784384 | kHz |

Table 5-3 Operating conditions

(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V, Operating ambient temperature range: Ta=-40 to +105°C)

| Items | | Symbols (Pin names, conditions) | Ratings | | | Unit |
|---------------------|------------------------------------|---------------------------------------|-----------|----------------------|-----------|------|
| | | | Min | Typ. | Max | |
| Power supply | VBAT Operating Voltage 2 (Note4) | VBATopr2 | 2.70 | 3.00 | 3.60 | V |
| | VDDIO Operating Voltage 2(Note2) | VDDIOopr2 | 2.70 | 3.00 | 3.60 | V |
| | VDDCORE Operating Voltage 2(Note2) | VDDCORE1/ VDDCORE2 | — | 1.1 / 1.2 (Note3) | — | V |
| RF frequency 2 | | Fc2 | 2400 | — | 2483.5 | MHz |
| Clock frequencies 2 | | Reference clock Fck | 25.99870 | 26.00000 | 26.00130 | MHz |
| | | Sleep clock fslclk | 32.751616 | 32.768000 | 32.784384 | kHz |

Note1: The VBAT pin has low voltage detection function and needs more than the minimum voltage of the VBATopr1 at the boot up.

Note2: Please refer to other documents (application note) for our connection examples.

Note3: During RF block operation and 26 MHz operation of CPU, this voltage is 1.2 V (typ.).

In other operation it becomes 1.1 V (typ.).

Note4: With extending the temperature range until Ta=105°C, please note that VBAT 2 operating voltage does not apply to the restriction of which the lower limit of VBAT operating voltage is until Ta=85°C.

5.3. DC electric characteristics

5.3.1. Current Consumption (Design value)

This section shows current consumption. When the operating temperature (Ta) is 25°C, and the operation of each power supply pin is in the recommendation connection state of our company, the current consumption is an average value.

**Table 5-4 Current consumption (VBAT = VDDIO1=VDDIO2 = 3.0 V)
(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V)**

| Items | Symbols | Conditions | Pins (Note) | Ratings | | | Unit |
|--------------------------------------|---------------------------------|--|----------------|---------|------|-----|------|
| | | | | Min | Typ. | Max | |
| Digital operation | IDD _{DIG} (Active1) | — | VBAT | — | 0.7 | — | mA |
| RX | IDD _{RX} (Active2) | — | | — | 3.3 | — | |
| TX | IDD _{TX} (Active3) | Output Power= 0 dBm | | — | 3.3 | — | |
| Low power mode With Connection | IDDS1 (Sleep) | 26 MHz crystal oscillator disabled 32 kHz crystal oscillator enabled When 144 KB-RAM retention is performed | VBAT | — | 1.8 | — | μA |
| Low power mode Without Connection | IDDS2 (Backup) | 26 MHz crystal oscillator disabled 32 kHz crystal oscillator enabled When 64 KB-RAM retention is performed | | — | 1.3 | — | |
| Low power mode Without Connection | IDDS (Deep Sleep) | 26 MHz crystal oscillator disabled 32 kHz crystal oscillator disabled | | — | 0.05 | — | |

Note: Current consumption of IO part in Active operation can be changed by buffer setting.

Table 5-5 shows DC electric characteristics for each pin at 25°C ambient temperature.

**Table 5-5 DC Electric Characteristics (VBAT = VDDIO1= VDDIO2 = 3.0 V)
(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V)**

| Item | Symbol | Condition | | Measuring Pin (Note 1) | Rating | | | Unit |
|---|------------|---|-----------------|---------------------------|-----------|------|-----------|------|
| | | I/F Voltage | Other Condition | | Min | Typ. | Max | |
| High Level Input Voltage | VIH | 3.0 V | LVC MOS | VDDIO | 0.8×VDDIO | — | — | V |
| Low Level Input Voltage | VIL | 3.0 V | LVC MOS | VDDIO | — | — | 0.2×VDDIO | V |
| High Level Input Current | IIH | VDDIO = Input Voltage of each pin | Pull-down Off | VDDIO | -10 | — | 10 | μA |
| | | | Pull-down On | | 10 | — | 200 | |
| Low Level Input Current | IIL | | Pull-up Off | | -10 | — | 10 | |
| | | | Pull-up On | | -200 | — | -10 | |
| High Level Output Voltage | VOH | 3.0 V | IOH = 1 mA | VDDIO | VDDIO-0.6 | — | — | V |
| Low Level Output Voltage | VOL | 3.0 V | IOL = 1 mA | VDDIO | — | — | 0.4 | V |
| External 32 kHz Clock Input level (Note2) | VIH SLPCLK | 3.0 V | — | SLPXOIN | 0.8×VDDIO | — | — | V |
| | VIL SLPCLK | 3.0 V | — | SLPXOIN | — | — | 0.2×VDDIO | V |

Note1: Please refer to Table 2-4 for power supply line for each pin. It shows the power supply system of each functional pin.

Note 2: External oscillator is used for this case instead of crystal oscillator.

5.4. Built-in Regulator Characteristics

Table 5-6 Built-in regulator characteristics (VBAT = 1.8 to 3.6 V Operating temperature range : -40 to 85°C)
(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V)

| Item | Symbol | Pin names and conditions | Ratings | | | Unit |
|-----------------|--------|--------------------------|---------|---------------------|-----|------|
| | | | Min | Typ. | Max | |
| Output voltages | Vout1 | VDDCORE1/ VDDCORE2 | — | 1.1 / 1.2 (Note) | — | V |

Note: During RF block operation and 26 MHz operation of CPU, this voltage is 1.2 V (typ.).

In other operation it becomes 1.1 V (typ.).

5.5. ADC Characteristics

Table 5-7 ADC characteristics (VBAT = 1.8 to 3.6 V (Note))
(VSSX=VSSDC=VSSRFIO=VSSA=VSSD1=VSSD2=0 V)

| Item | Symbol | Condition | Ratings | | | Unit |
|------------------------------------|--------|-----------|---------|------|-------|------|
| | | | Min | Typ. | Max | |
| Analog reference voltage (Note) | VREFH | — | 1.8 | 3.0 | 3.6 | V |
| Analog input voltage | VAIN | — | VSSD | — | VREFH | V |

Note: Operating in -40 to +85°C.

5.6. RF Characteristics

The following conditions are applicable unless otherwise specified.

- Ta = 25°C
- VBAT = 3.0 V
- fx'tal = 26 MHz (Frequency accuracy is adjusted to ±2 ppm at normal temperature)
- PAOUT= 0 dBm

Table 5-8, Table 5-9 shows RF receiving characteristics and RF transmitting characteristics based on Bluetooth® Core Spec. V4.2 low energy.

About some the characteristics data here are design values.

Table 5-8 RF Characteristics

| Test Item | Packet | bit | ch. | Condition | Spec. | | | Unit |
|--------------------------------|------------|----------|-------------|-------------------------------------|-------|-------|------------|----------------|
| | | | | | Min | Typ. | Max | |
| Output Power | 255 octets | PRBS9 | 0,12, 19,39 | peak | — | — | Pavg+ 3 dB | dBm |
| | | | | average | — | 0 | — | |
| In-band Emissions | 255 octets | PRBS9 | 0,12, 19,39 | -5 MHz | — | -60 | -30 | dBm |
| | | | | -4 MHz | — | -55 | -30 | |
| | | | | -3 MHz | — | -53 | -30 | |
| | | | | -2 MHz | — | -48 | -20 | |
| | | | | 2 MHz | — | -50 | -20 | |
| | | | | 3 MHz | — | -53 | -30 | |
| | | | | 4 MHz | — | -56 | -30 | |
| Modulation Characteristics | 255 octets | 11110000 | 0,12, 19,39 | $\Delta f1_{avg}$ (11110000) | 225 | 249.3 | 275 | kHz |
| | | 10101010 | | $\Delta f2_{max}$ (99.9 %) | 99.9 | 100 | — | % |
| | | — | | $\Delta f2_{avg} / \Delta f1_{avg}$ | 0.8 | 0.90 | — | Ratio |
| Carrier frequency offset (CFO) | 255 octets | 10101010 | 0,12, 19,39 | average | — | 4.4 | — | kHz |
| | | | | worst | -150 | — | 150 | |
| Carrier frequency drift | 255 octets | 10101010 | 0,12, 19,39 | Absolute maximum | — | 4.9 | 50 | kHz |
| Carrier frequency drift Rate | 255 octets | 10101010 | 0,12, 19,39 | Absolute maximum | — | 4.9 | 20 | kHz/50 μ s |

Table 5-9 RF Characteristics

| Test Item | Sub Item | Packet | bit | ch. | Condition | Min | Typ. | Max | Unit |
|--|---|-------------|--|-------------------|---|------|-------------|------|------|
| Rx Sensitivity | — | 37 octets | — | 0,12, 19,3 | PER=30.8 % at 1500 packets with dirty | — | -93.5 | — | dBm |
| C/I and Receiver Selectivity Performance | PER=30.8 % at 1500 packets with dirty | 255 octets | D wave: PRBS9 U wave: GFSK PRBS15 | 0,2,12, 19,37, 39 | ≤ -7 MHz | — | -38 or less | — | dB |
| | | | | | -6 MHz | — | -32 | — | |
| | | | | | -5 MHz | — | -26 | — | |
| | | | | | -4 MHz | — | -30 | — | |
| | | | | | -3 MHz | — | -32 | — | |
| | | | | | -2 MHz | — | -35 | — | |
| | | | | | -1 MHz | — | -2 | — | |
| | | | | | 0 MHz | — | 8 | — | |
| | | | | | 1 MHz | — | -2 | — | |
| | | | | | 2 MHz | — | -30 | — | |
| | | | | | 3 MHz | — | -38 | — | |
| | | | | | 4 MHz | — | -40 | — | |
| 5 MHz | — | -44 | — | | | | | | |
| ≥ 6 MHz | — | -38 or less | — | | | | | | |
| Blocking Performance | — | 255 octets | D wave: PRBS9 U wave: CW | 12 | 30-2000 MHz | -30 | — | — | dBm |
| | | | | | 2003-2399 MHz | -35 | — | — | |
| | | | | | 2484-2997 MHz | -35 | — | — | |
| | | | | | 3000 M-12.75 GHz | -30 | — | — | |
| Intermodulation Performance | 1500 packets | 255 octets | f1=-50 dBm with un-modulation f2=-50 dBm with PRBS15 | 0,12, 19,39 | -4 MHz | 30.8 | 0 | — | % |
| | | | | | +4 MHz | | | | |
| Maximum input signal level | PER | 255 octets | PRBS9 | 0,12, 19,39 | -10 dBm | 30.8 | 0 | — | % |
| PER Report Integrity | PER | 255 octets | PRBS9 | 0,12, 19,39 | -30 dBm | 50 | 50 | 65.4 | % |

Note: C/I characteristic and blocking characteristic has the relief specs of the logo attestation test of Bluetooth® maybe applied. The blocking characteristic measures D wave as 12 ch.

5.7. AC Interface Characteristics (Design value)

- Ta = 25°C
- VBAT = 3.0 V

5.7.1. UART Interface

Table 5-10 UART Interface AC characteristics

| Symbols | Items | Min | Typ. | Max | Unit |
|----------|--|-----|------|-----|------|
| tCLDTDLY | Transmit Data ON from CTSX Low level | 192 | — | — | ns |
| tCHDTDLY | Transmit Data OFF from CTSX High level | — | — | 2 | byte |
| tRLDTDLY | Received Data ON from RTSX Low level | 0 | — | — | ns |
| tRHDTDLY | Received Data OFF from RTSX High level | — | — | 8 | byte |

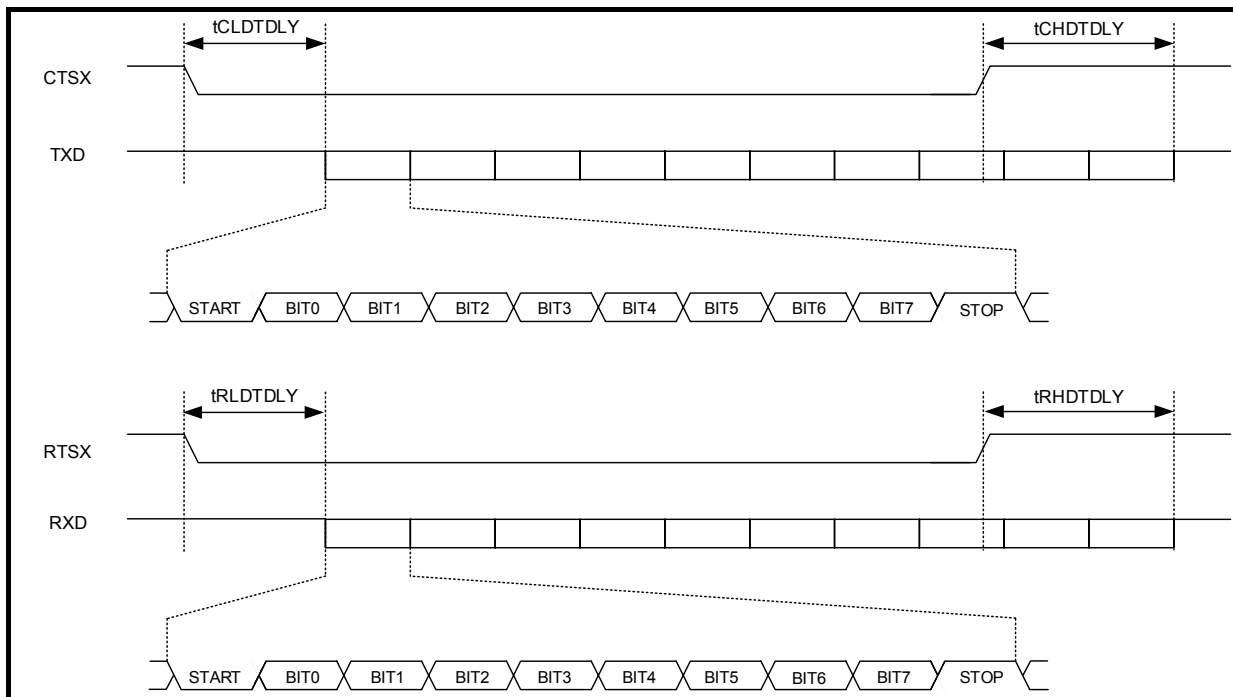


Figure 5-1 UART Interface Timing Diagram

5.7.2. I²C Interface

5.7.2.1. Normal Mode

Table 5-11 I²C Interface Normal mode AC Characteristics

| Symbols | Items | Min | Typ. | Max | Unit |
|-------------------|--|------|------|------|------|
| tDATS | Data setup time | 250 | — | — | ns |
| tDATH | Data hold time | 300 | — | — | ns |
| tDATVD | Data validity period | — | — | 3450 | ns |
| tACKVD | ACK validity period | — | — | 3450 | ns |
| tSTAS | Restart condition setup time | 4700 | — | — | ns |
| tSTAH | Restart condition hold time | 4000 | — | — | ns |
| tSTOS | Stop condition setup time | 4000 | — | — | ns |
| tBUF | Bus open period from stop condition to start condition | 4700 | — | — | ns |
| t _r | Rise up time | — | — | 1000 | ns |
| t _f | Fall down time | — | — | 300 | ns |
| t _{HIGH} | Serial clock period of High | 4000 | — | — | ns |
| t _{LOW} | Serial clock period of Low | 4700 | — | — | ns |
| C _b | Bus load capacitance | — | — | 400 | pF |

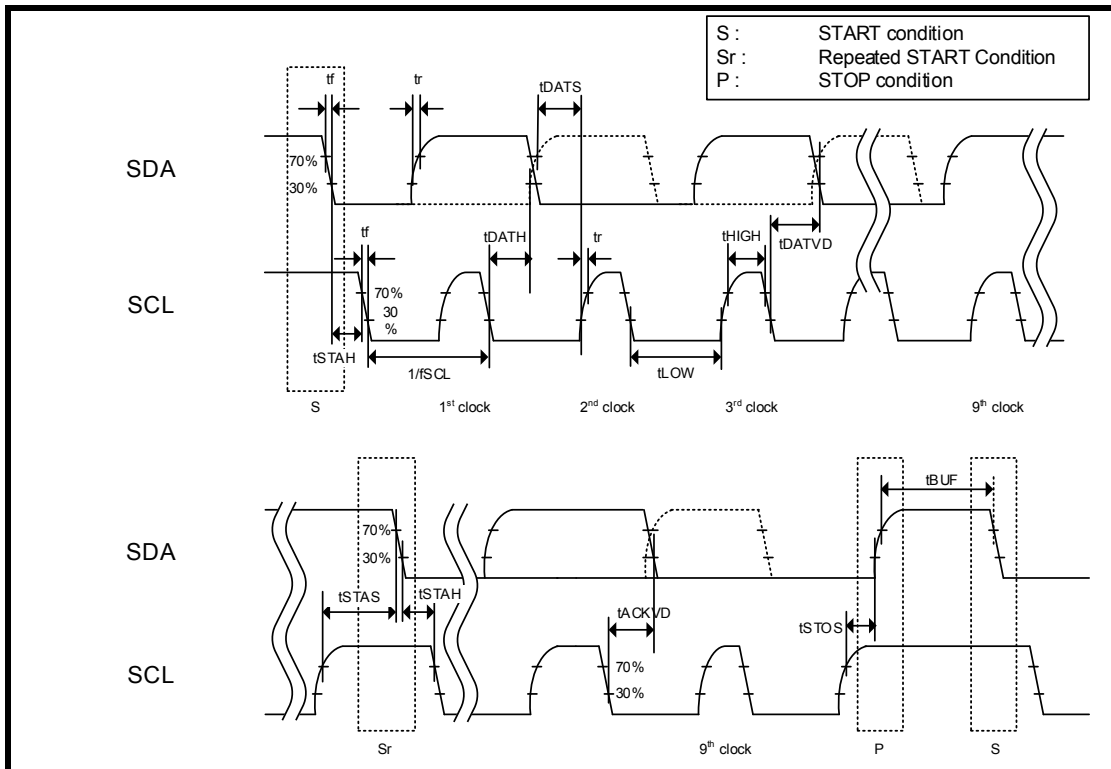


Figure 5-2 I²C Interface Normal mode Timing diagram

5.7.2.2. Fast mode

Table 5-12 I²C Interface Fast mode AC Characteristics

| Symbols | Items | Min | Typ. | Max | Unit |
|----------------|--|-------------------------|------|-----|------|
| tDATS | Data setup time | 100 | — | — | ns |
| tDATH | Data hold time | 300 | — | — | ns |
| tDATVD | Data validity period | — | — | 900 | ns |
| tACKVD | ACK validity period | — | — | 900 | ns |
| tSTAS | Restart condition setup time | 600 | — | — | ns |
| tSTAH | Restart condition hold time | 600 | — | — | ns |
| tSTOS | Stop condition setup time | 600 | — | — | ns |
| tBUF | Bus open period from stop condition to start condition | 1300 | — | — | ns |
| t _r | Rise up time | 20 + 0.1 C _b | — | 300 | ns |
| t _f | Fall down time | 20 + 0.1 C _b | — | 300 | ns |
| tSP | Spike pulse width that can be removed | 0 | — | 50 | ns |
| tHIGH | Serial clock period of High | — | 1423 | — | ns |
| tLOW | Serial clock period of Low | — | 1423 | — | ns |
| C _b | Bus load capacitance | — | — | 400 | pF |

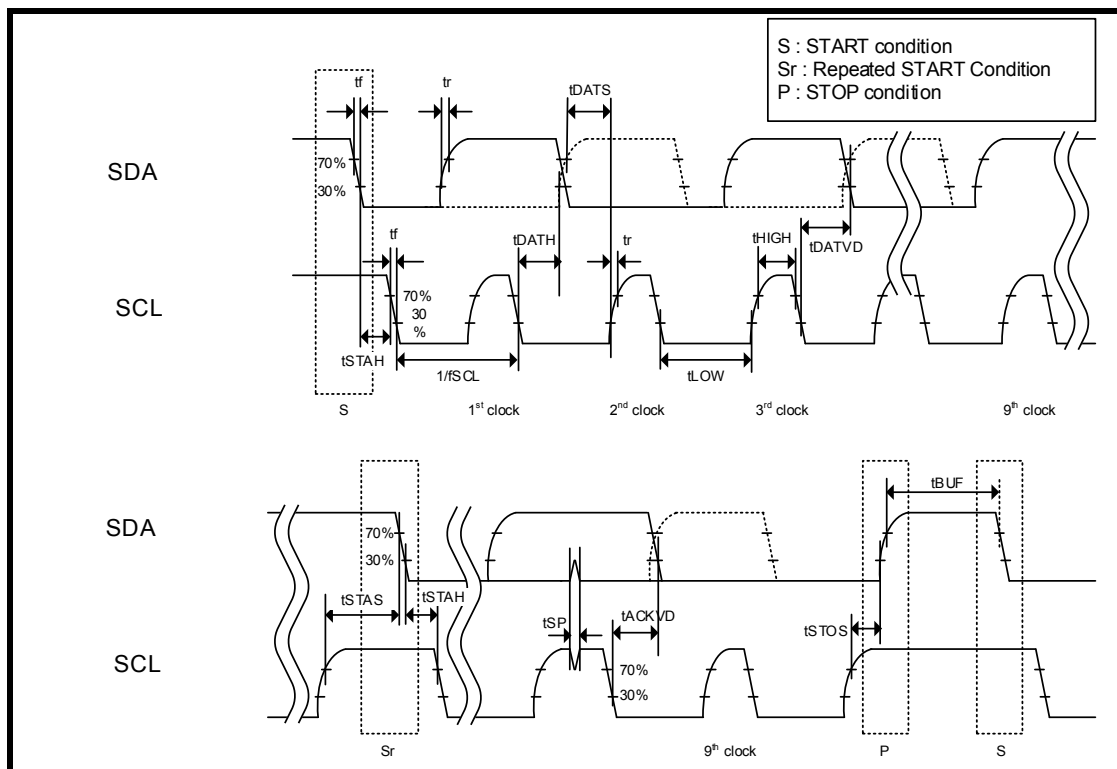


Figure 5-3 I²C Interface Fast mode Timing diagram

5.7.3. SPI Interface

Table 5-13 SPI Interface

| Symbols | Items | Min | Typ. | Max | Unit |
|------------|-------------------------------|-----|------|-----|------|
| tSPICLKCYC | SPI clock cycle | 154 | — | — | ns |
| tSPICLKHPW | SPI clock high pulse width | 77 | — | — | ns |
| tSPICLKPW | SPI clock low pulse width | 77 | — | — | ns |
| tSPICSS | SPI chip select setup time | 38 | — | — | ns |
| tSPICSH | SPI chip select hold time | 77 | — | — | ns |
| tSPIIW | SPI transfer idle pulse width | 54 | — | — | ns |
| tSPIAS | SPI address setup time | 38 | — | — | ns |
| tSPIAH | SPI address hold time | 77 | — | — | ns |
| tSPIDS | SPI data setup time | 38 | — | — | ns |
| tSPIDH | SPI data hold time | 77 | — | — | ns |

Note: SPI Interface operates on the basis of 1/n frequency of half the frequency of ARM® Cortex®-M0 core clock (6.5 MHz for 13 MHz core clock)

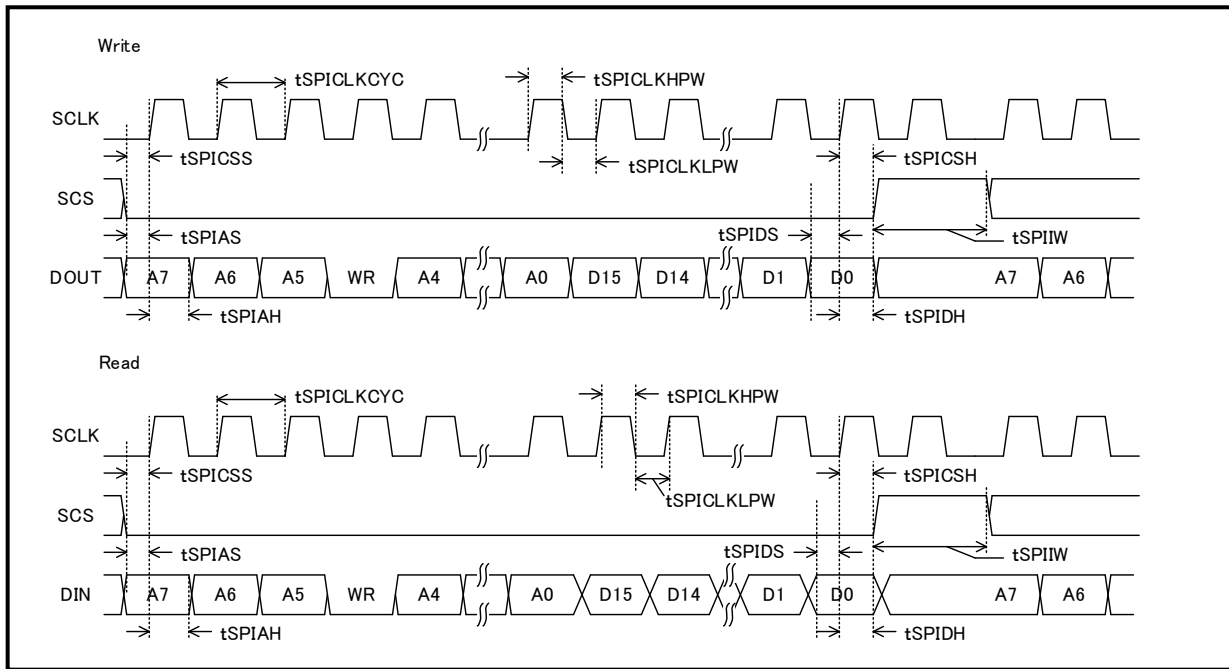


Figure 5-4 SPI Interface timing diagram

6. System Configuration Example

An example of system configuration is shown in the following figures.

6.1. In case of Host CPU connection

- Host interface=UART and 26 MHz Reference Clock= XOSC Connection.
- XOSC (32.768 kHz) of the dotted line enclosure is unnecessary when the external input (HOST common use) is chosen.

The connections of GPIO and SWD are the example of when they are not in use.

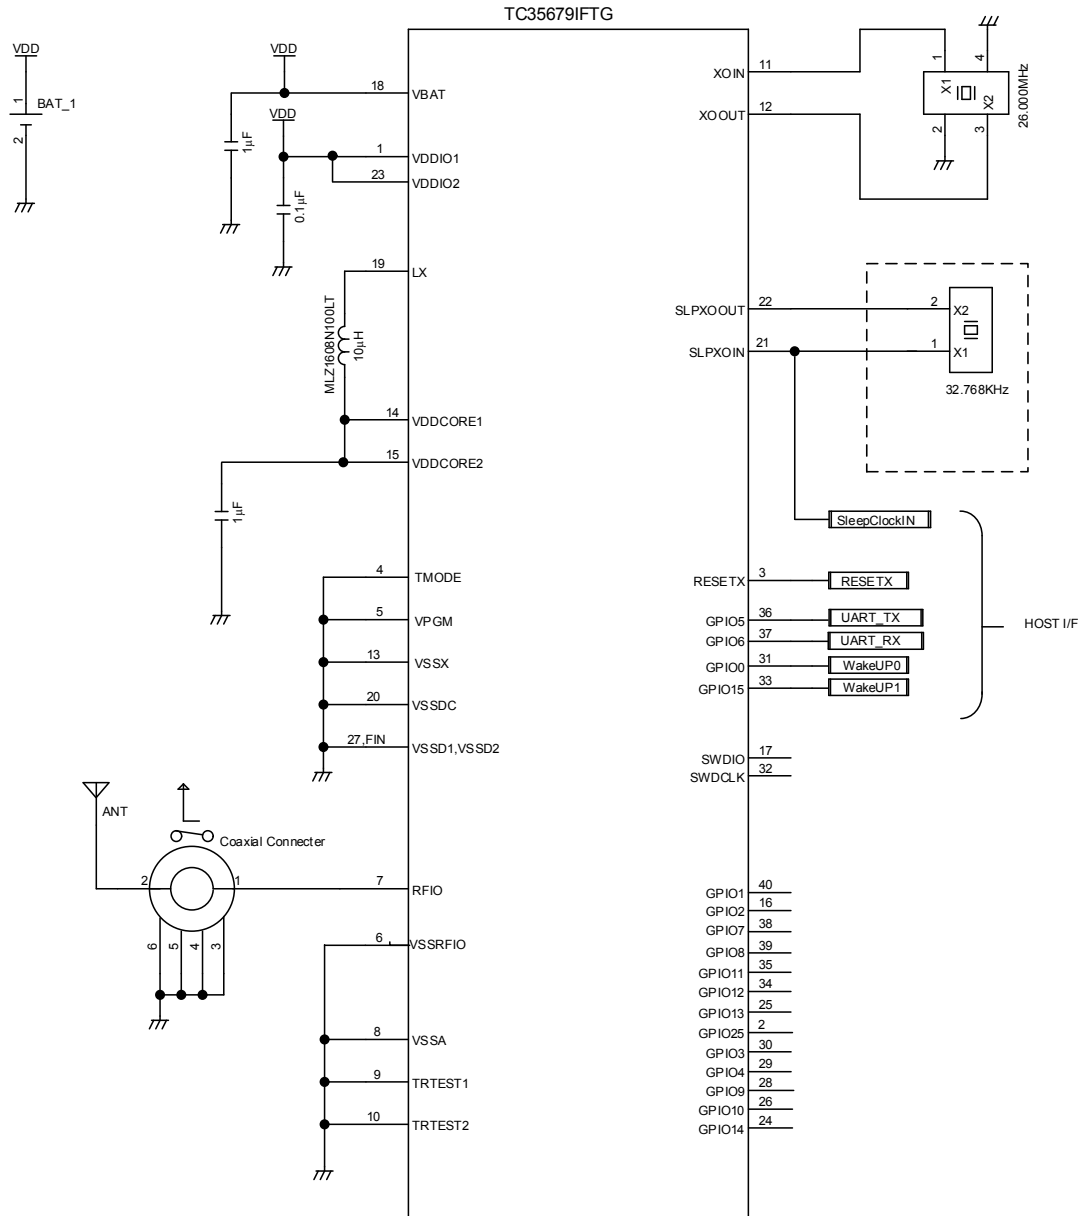


Figure 6-1 Example of TC35679IFTG system configuration (HOST CPU connection)

6.2. In case of Standalone

- XOSC (32.768 kHz) of the dotted line enclosure is unnecessary when the external input is chosen.
- The connections of GPIO and SWD are the example of when they are not in use.


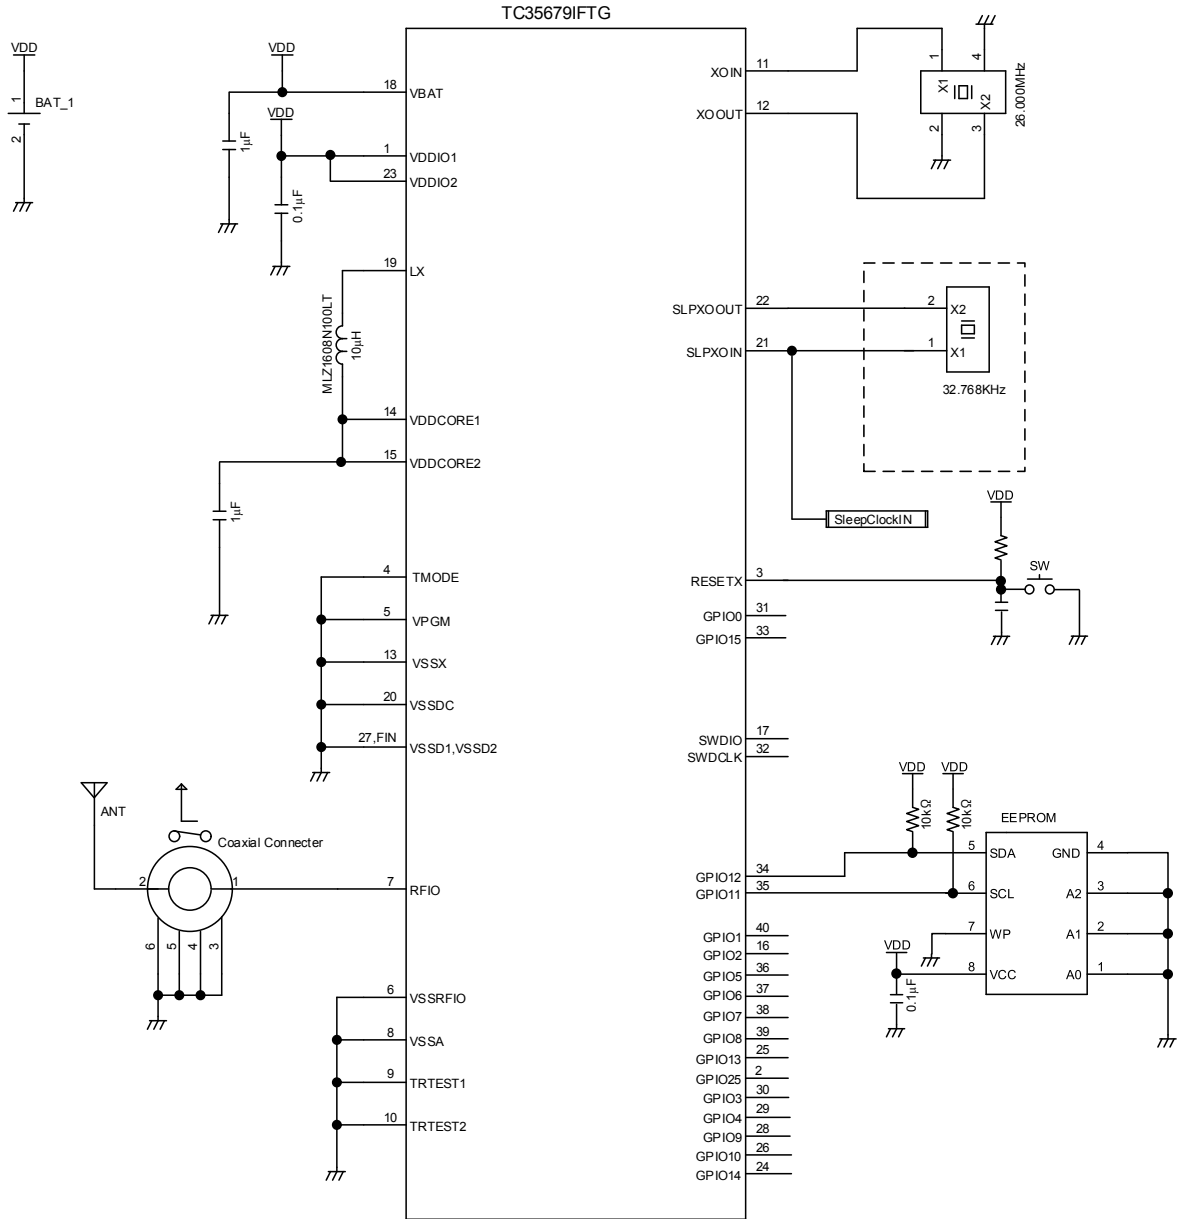


Figure 6-2 Example of TC35679IFTG system configuration (Stand-alone)

7. Package outline

7.1. Outline dimensional drawing TC35679IFTG-002 (P-VQFN40-0606-0.50-002)

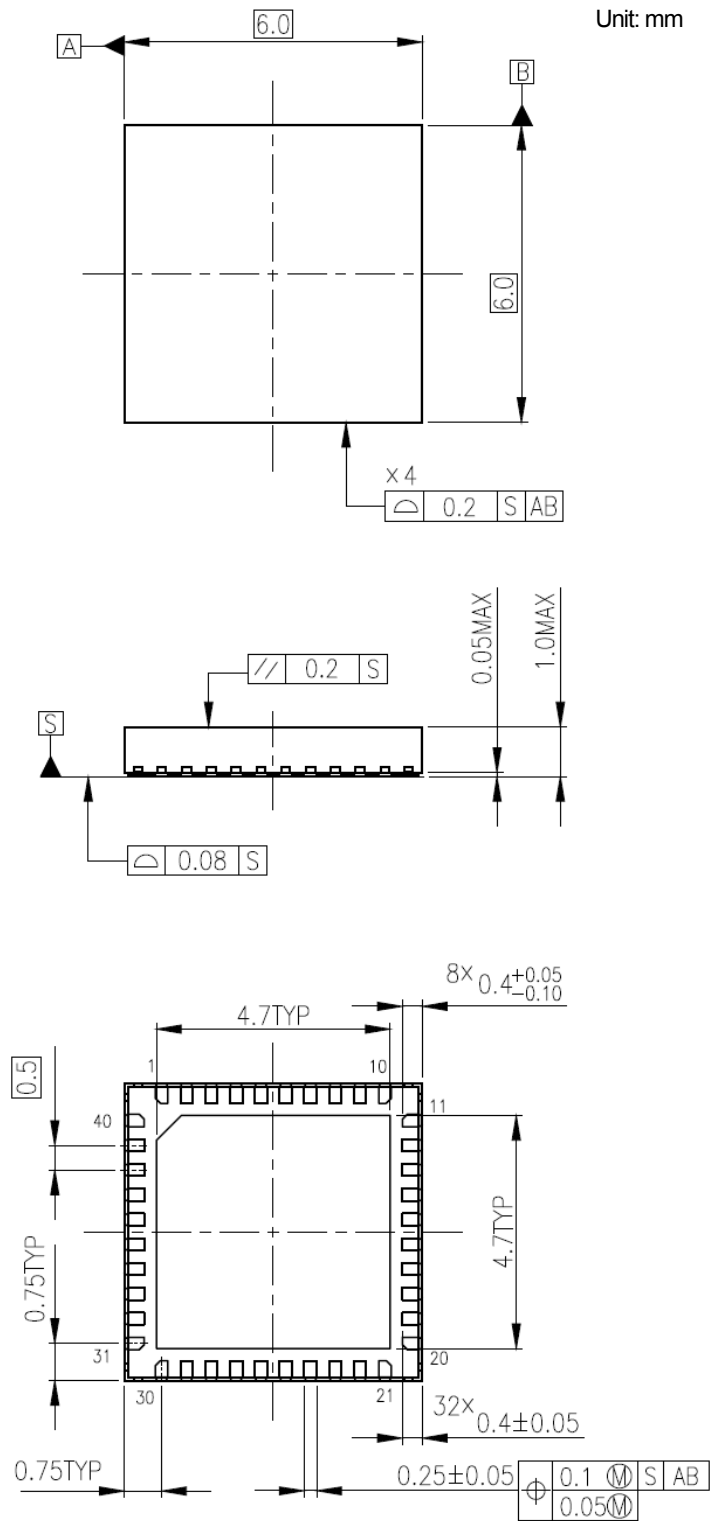

Weight: 0.11 g (Typ.)

Figure 7-1 Package outline (P-VQFN40-0606-0.50-002)

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**