

32-bit RISC Microcontroller
TXZ+ Family
TMPM4H Group(1)

Reference Manual
Product Information
(PINFO-M4H(1))

Revision 1.0

2026-04

Toshiba Electronic Devices & Storage Corporation

Contents

Preface	7
Related Documents	7
Conventions	8
Terms and Abbreviations	10
1. Overview	11
2. Information of Peripheral Function	11
2.1. Register Base Address	11
2.2. Trigger Selector (TRGSEL).....	12
2.2.1. Trigger Selector List for Each Products	13
2.2.2. Operation and Setting.....	19
2.2.3. List of Registers	20
2.2.4. Details of Registers	21
2.2.4.1. [TSELxCR0] (Control Register 0)	21
2.2.4.2. [TSELxCR1] (Control Register1)	23
2.2.4.3. [TSELxCR2] (Control Register 2)	25
2.2.4.4. [TSELxCR3] (Control Register 3)	27
2.2.4.5. [TSELxCR4] (Control Register 4)	29
2.2.4.6. [TSELxCR5] (Control Register 5)	31
2.2.4.7. [TSELxCR6] (Control Register 6)	33
2.2.4.8. [TSELxCR7] (Control Register 7)	35
2.2.4.9. [TSELxCR8] (Control Register 8)	37
2.2.4.10. [TSELxCR9] (Control Register 9)	39
2.2.4.11. [TSELxCR10] (Control Register 10)	41
2.3. Direct Memory Access Controller (DMAC)	43
2.3.1. Built-in Unit	43
2.3.2. DMA Request Table	43
2.4. 32-bit Timer Event Counter (T32A).....	47
2.4.1. Built-in Channel	47
2.4.2. Functional Pins	48
2.4.3. Clock for Prescaler	50
2.4.4. Internal Signal Connection Specification	50
2.4.4.1. Capture Trigger Signal Connection	50
2.4.4.2. Synchronous Control Connection	54
2.4.5. Pulse Counter List for Each Product.....	55
2.4.6. DMA Request	56
2.4.7. Internal Signal Connection Specification	57
2.5. Universal Asynchronous Receiver Transmitter Circuit (UART)	58
2.5.1. Built-in Channel	58
2.5.2. Function Pin and Port	58
2.5.3. Half Clock Mode Support.....	59
2.5.4. Clock for Prescaler	59

2.5.5. DMA Request	59
2.5.6. Internal Signal Connection Specification	60
2.5.6.1. Trigger Transfer Signal Connection	60
2.5.6.2. T32A Connection	61
2.6. Serial Peripheral Interface (TSPI)	62
2.6.1. Built-in Channel	62
2.6.2. Function Pin and Port	62
2.6.3. Transfer Mode of Each Product	63
2.6.4. [TSPIxCR2]<RXDLY> Set Value	63
2.6.5. Clock for Prescaler	63
2.6.6. DMA Request	64
2.6.7. Internal Signal Connection Specification	65
2.6.7.1. Trigger Transfer Signal Connection	65
2.6.7.2. T32A Connection	66
2.7. I ² C Interface (I2C)	67
2.7.1. Built-in Channel	67
2.7.2. Function Pin and Port	67
2.7.3. Clock for Prescaler	67
2.7.4. DMA Request	68
2.8. I ² C Interface Version A (EI2C)	69
2.8.1. Built-in Channel	69
2.8.2. Function Pin and Port	69
2.8.3. Base Address	69
2.8.4. Clock for Prescaler	70
2.8.5. DMA Request	71
2.9. 12-bit Analog to Digital Converter (ADC)	72
2.9.1. Built-in Unit	72
2.9.2. Corresponding Registers	72
2.9.3. Function Pin and Port	73
2.9.4. Conversion Clock of ADC	73
2.9.5. Setting Value of Mode Setting Register 2	74
2.9.6. Trimming Setting Register Setting Value	74
2.9.7. DMA Request	74
2.9.8. Internal Signal Connection Specification	75
2.9.8.1. Startup Trigger Connection Specifications	76
2.9.8.2. Other Connection	78
2.9.9. Trigger Generation Circuit (TRGGEN)	79
2.9.9.1. Function and Operation	79
2.9.9.2. Registers	79
2.9.9.3. [TRGGEN] (Trigger Generation Register)	79
2.10. Advanced Programmable Motor Control Circuit (A-PMD)	80
2.10.1. Built-in Channel	80
2.10.2. Function Pin and Port	80
2.10.3. DMA Request	80

2.10.4. Internal Signal Connection Specification	81
2.10.4.1. Other Connection	81
2.11. Clock Selective Watchdog Timer (SIWDT).....	82
2.11.1. Built-in Channel	82
2.11.2. Count Clock.....	82
2.11.3. Output Control	82
2.12. CRC Calculation Circuit (CRC).....	83
2.13. RAM Parity (RAMP)	83
2.13.1. Built-in Channel	83
2.13.2. Error Detection Block Area	83
2.14. Oscillation Frequency Detection Circuit (OFD).....	84
2.14.1. Built-in Channel	84
2.14.2. Reference Clock.....	84
2.14.3. Clock for Detection	84
2.15. Debug Interface	85
2.15.1. Debug Interface List for Each Product.....	85
2.16. Non Break Debug Interface (NBDIF)	86
2.16.1. Built-in Channel	86
2.16.2. NBDIF List for Each Product.....	86
2.17. Digital Noise Filter (DNF).....	87
2.17.1. Built-in Unit	87
2.17.2. External Interrupt List for Each Product.....	87
2.17.3. Sampling Source Clock	88
2.18. Trimming Circuit (TRM).....	88
2.18.1. Built-in Channel	88
2.18.2. Target Oscillator	88
2.19. Voltage Detection Circuit (LVD).....	89
2.19.1. Built-in Channel	89
2.19.2. Detection Power Supply	89
2.20. Flash Memory	90
2.20.1. Clock for Programming/Erasing.....	90
2.20.2. Code Flash Block Configuration	90
2.20.3. Access Control Register [FCACCR]<FCLC[2:0]> Setting.....	91
2.20.4. Macro Code at ID-Read.....	91
2.20.5. Single Boot Resource.....	91
3. Revision History	92
RESTRICTIONS ON PRODUCT USE.....	93

List of Figures

Figure 2.1	Example of Trigger Selector Connection.....	12
Figure 2.2	Connecting of ADC and Peripheral Functions.....	75

List of Tables

Table 2.1	Type of Register Base Address	11
Table 2.2	Trigger Selector List for Each Product (1/6)	13
Table 2.3	Trigger Selector List for Each Product (2/6)	14
Table 2.4	Trigger Selector List for Each Product (3/6)	15
Table 2.5	Trigger Selector List for Each Product (4/6)	16
Table 2.6	Trigger Selector List for Each Product (5/6)	17
Table 2.7	Trigger Selector List for Each Product (6/6)	18
Table 2.8	DMAC Built-in Unit	43
Table 2.9	DMA Request Table (1/4)	43
Table 2.10	DMA Request Table (2/4)	44
Table 2.11	DMA Request Table (3/4)	45
Table 2.12	DMA Request Table (4/4)	46
Table 2.13	T32A Built-in Channel	47
Table 2.14	T32A Functional Pin and Port (1/2)	48
Table 2.15	T32A Functional Pins and Port (2/2).....	49
Table 2.16	T32A Clock for Prescaler	50
Table 2.17	T32A Capture Trigger Connection (1/3)	51
Table 2.18	T32A Capture Trigger Connection (2/3)	52
Table 2.19	T32A Capture Trigger Connection (3/3)	53
Table 2.20	T32A Synchronous Control Connection Specifications	54
Table 2.21	T32A Pulse Counter List for Each Product	55
Table 2.22	T32A DMA Request (1/2).....	56
Table 2.23	T32A DMA Request (2/2).....	57
Table 2.24	UART Built-in Channel.....	58
Table 2.25	UART Functional Pin and Port.....	58
Table 2.26	UART Clock for Prescaler	59
Table 2.27	UART DMA Request	59
Table 2.28	UART Trigger Transfer Signal Connection	60
Table 2.29	UART Inside Connection List: Output.....	61
Table 2.30	TSPI Built-in Channel.....	62
Table 2.31	TSPI Function Pin and Port	62
Table 2.32	TSPI Mode List.....	63
Table 2.33	[TSPIxCR2]<RXDLY[2:0]> Set Value	63
Table 2.34	TSPI Clock for Prescaler.....	63
Table 2.35	TSPI DMA Request.....	64
Table 2.36	TSPI Trigger Transfer	65
Table 2.37	TSPI Inside Connection (Output).....	66
Table 2.38	I2C Built-in Channel	67
Table 2.39	I2C Function Pin and Port.....	67
Table 2.40	I2C Clock for Prescaler	67
Table 2.41	I2C DMA Request	68
Table 2.42	EI2C Built-in Channel.....	69
Table 2.43	EI2C Function Pin and Port	69
Table 2.44	EI2C Base Address.....	69
Table 2.45	EI2C Clock for Prescaler.....	70
Table 2.46	EI2C DMA Request.....	71
Table 2.47	ADC Built-in Unit	72
Table 2.48	ADC Corresponding Registers.....	72
Table 2.49	ADC Function Pin and Port.....	73

Table 2.50	Conversion Clock of ADC	73
Table 2.51	Setting Value of ADC Mode Setting Register 2	74
Table 2.52	Setting Value of Trimming Setting Register	74
Table 2.53	ADC DMA Request	74
Table 2.54	ADC Startup Trigger Connection Specifications	77
Table 2.55	ADC Inside Connection: Output	78
Table 2.56	A-PMD Built-in Channel	80
Table 2.57	A-PMD Function Pin	80
Table 2.58	A-PMD DMA Request	80
Table 2.59	A-PMD Inside Connection List: Input	81
Table 2.60	A-PMD Inside Connection List: Output	81
Table 2.61	SIWDT Built-in Channel	82
Table 2.62	SIWDT Count Clock	82
Table 2.63	SIWDT Output Control	82
Table 2.64	CRC Built-in Channel	83
Table 2.65	RAMP Built-in Channel	83
Table 2.66	RAM Area and Address of RAMP	83
Table 2.67	OFD Built-in Channel	84
Table 2.68	OFD Reference Clock	84
Table 2.69	OFD Clock for Detection	84
Table 2.70	Debug Interface List	85
Table 2.71	NBDIF Built-in Channel	86
Table 2.72	NBDIF Interface List	86
Table 2.73	DNF Built-in Unit	87
Table 2.74	External Interrupt and DNF	87
Table 2.75	DNF Sampling Source Clock	88
Table 2.76	TRM Built-in Channel	88
Table 2.77	TRM Trimming Target Oscillator	88
Table 2.78	LVD Built-in Channel	89
Table 2.79	LVD Detection Power Supply	89
Table 2.80	Clock for Programming/Erasing	90
Table 2.81	Code Flash	90
Table 2.82	Access Control Register [FCACCR]<FCLC[2:0]> Setting	91
Table 2.83	Macro Code at ID-Read	91
Table 2.84	Single Boot Resource	91
Table 3.1	Revision History	92

Preface

Related Documents

Document name	IP Symbol
Input/Output Ports	PORT-M4H(1)
Exception	EXCEPT-M4H(1)
Clock Control and Operation Mode	CG-M4H(1)
DMA Controller	DMAC-B
32-bit Timer Event Counter	T32A-C
Asynchronous Serial Communication Circuit	UART-C
Serial Peripheral Interface	TSPI-E
I ² C interface	I2C-B
I ² C interface Version A	EI2C-A2
12-bit Analog to Digital Converter	ADC-G2
Advanced Programmable Motor Control Circuit	A-PMD-A
Clock Selective Watchdog Timer	SIWDT-A
Oscillation Frequency Detector	OFD-A
Debug Interface	DEBUG-A
Non-break Debug Interface	NBDIF-A
Digital Noise Filter Circuit	DNF-A
Trimming Circuit	TRM-B
Voltage Detection Circuit	LVD-D
CRC Calculation Circuit	CRC-A
RAM Parity	RAMP-B
Flash Memory	FLASH256U2-A

Conventions

- Numeric formats follow the rules as shown below:

Hexadecimal:	0xABC	
Decimal:	123 or 0d123	- Only when it needs to be explicitly shown that they are decimal numbers.
Binary:	0b111	- It is possible to omit the "0b" when the number of bits can be distinctly understood from a sentence.
- "_N" is added to the end of signal names to indicate low active signals.
- It is called "assert" that a signal moves to its active level, "deassert" to its inactive level.
- When two or more signal names are referred, they are described like as [m:n].
 Example: S[3:0] shows four signal names S3, S2, S1 and S0 together.
- The characters surrounded by [] defines the register.
 Example: [ABCD]
- "N" substitutes suffix number of two or more same kind of registers, fields, and bit names.
 Example: [XYZ1], [XYZ2], [XYZ3] → [XYZn]
- "x" substitutes suffix number or character of units and channels in the register list.
- In case of unit, "x" means A, B, and C, ...
 Example: [ADACR0], [ADBCR0], [ADCCR0] → [ADxCR0]
- In case of channel, "x" means 0, 1, and 2, ...
 Example: [T32A0RUNA], [T32A1RUNA], [T32A2RUNA] → [T32AxRUNA]
- The bit range of a register is written like as [m: n].
 Example: Bit[3: 0] expresses the range of bit 3 to 0.
- The configuration value of a register is expressed by either the hexadecimal number or the binary number.
 Example: [ABCD]<EFG> = 0x01 (hexadecimal), [XYZn]<VW> = 1 (binary)
- Word and byte represent the following bit length.

Byte:	8 bits
Half word:	16 bits
Word:	32 bits
Double word:	64 bits
- Properties of each bit in a register are expressed as follows:

R:	Read only
W:	Write only
R/W:	Read and write are possible.
- Unless otherwise specified, register access supports only word access.
- The register defined as "Reserved" must not be rewritten. Moreover, do not use the read value.
- The value read from the bit having default value of "-" is unknown.
- When a register containing both of writable bits and read-only bits is written, read-only bits should be written with their default value, In the cases that default is "-", follow the definition of each register.
- Reserved bits of the write-only register should be written with their default value. In the cases that default is "-", follow the definition of each register.
- Do not use read-modified-write processing to the register of a definition which is different by writing and read out.

Arm, Cortex and Thumb are registered trademarks of Arm Limited (or its subsidiaries) in the US
and/or elsewhere. All rights reserved.



All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Terms and Abbreviations

Some of abbreviations used in this document are as follows:

ADC	Analog to Digital Converter
A-PMD	Advanced Programmable Motor Control Circuit
CRC	Cyclic Redundancy Check
DMAC	Direct Memory Access Controller
DNF	Digital Noise Filter
EHOSC	External High-speed Oscillator
EI2C	I ² C Interface Version A
IHOSC	Internal High-speed Oscillator
INT	Interrupt
I2C	Inter-Integrated Circuit
LVD	Voltage Detection Circuit
NBDIF	Non Break Debug Interface
OFD	Oscillation Frequency Detector
RAMP	RAM Parity
SIWDT	Clock Selective Watchdog Timer
TRGSEL	Trigger Selection Circuit
TRM	Trimming Circuit
TSPI	Serial Peripheral Interface
T32A	32-bit Timer Event Counter
UART	Asynchronous Serial Communication Circuit

1. Overview

This chapter describes peripheral function-related channels or number of units, information of pins and product-specific function information. Use this chapter in conjunction with Reference Manual for Peripheral Function.

2. Information of Peripheral Function

2.1. Register Base Address

The following table shows the type of base address of each peripheral.

Table 2.1 Type of Register Base Address

Product	Type of base address
TPM4H Group(1)	TYPE1

To develop each peripheral function, please refer to the above type of base address.

In case of no information of Type1/2 of the base address in the Reference manual, it use as Type1.

Note: For the base address of the I²C interface version A (EI2C), refer to "2.8.3 Base Address" in this document.

2.2. Trigger Selector (TRGSEL)

The trigger selector is the circuit which chooses the one trigger and outputs the trigger signal to the peripheral function from two or more triggers inputted from the peripheral function, the port, etc.

The trigger chosen from eight triggers by $[TSEL0CRn]<INSELM>$ is outputted to the peripheral function of a connection destination.

"Figure 2.1 Example of Trigger Selector Connection" is an example of connection DMA transmission end interrupts to DMAC via trigger selector. The setup of input trigger selection, edge detection condition selection, trigger output selection, and trigger output control is performed by $[TSEL0CR3]$.

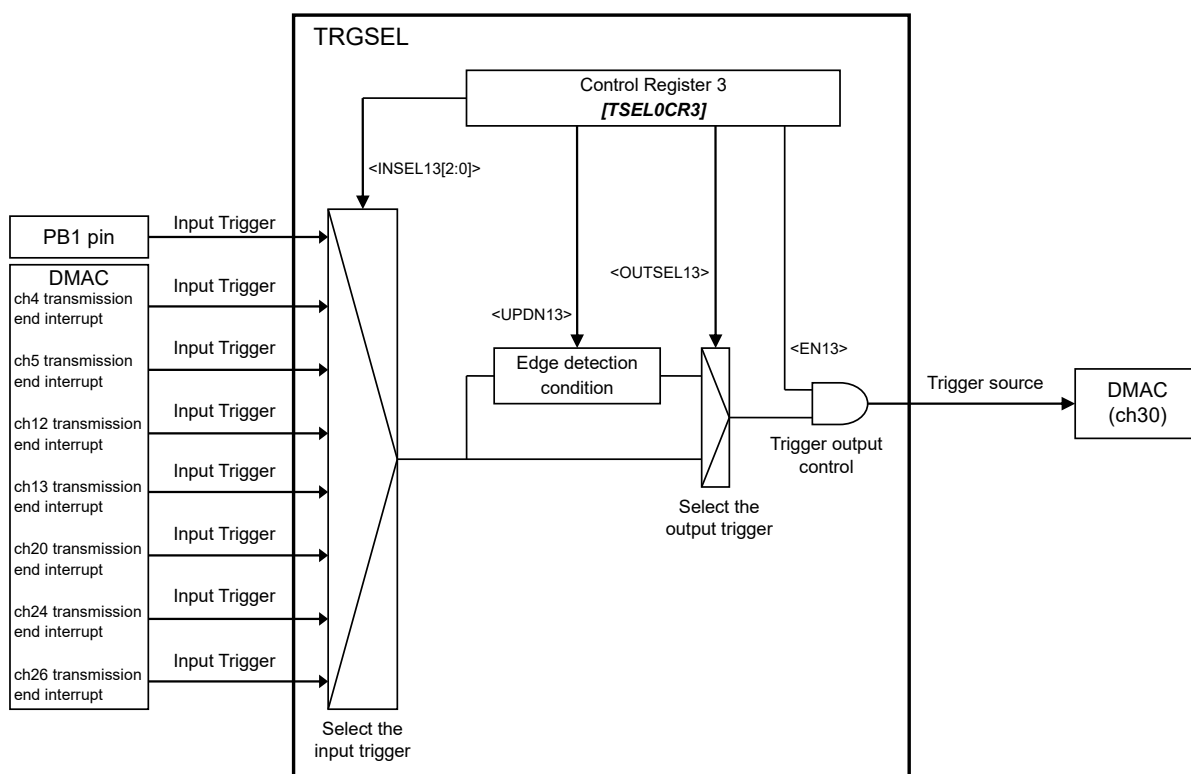


Figure 2.1 Example of Trigger Selector Connection

2.2.1. Trigger Selector List for Each Products

Trigger selector of TPM4H Group(1) consist of 11 control registers (*[TSEL0CR0 to 10]*), and 42 triggers are controlled.

The following table shows "Trigger Selector List of each Product".

Table 2.2 Trigger Selector List for Each Product (1/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)		
				M4H4	M4H2	M4H1
<i>[TSEL0CR0]</i>	INSEL0	DMA ch7	TSPI ch3 transmit DMA request	✓	-	-
	INSEL1	DMA ch18	ADC unit A general purpose trigger DMA request ADC unit A single conversion DMA request ADC unit A continuous conversion DMA request	✓	✓	✓
	INSEL2	DMA ch19	T32A ch0 DMA request at match A1 register T32A ch0 DMA request at match C1 register T32A ch1 DMA request at match A1 register T32A ch1 DMA request at match C1 register A-PMD ch0 PWM interrupt	✓	✓	✓
	INSEL3	DMA ch20	T32A ch2 DMA request at match A1 register T32A ch2 DMA request at match C1 register T32A ch3 DMA request at match A1 register T32A ch3 DMA request at match C1 register	✓	✓	✓
<i>[TSEL0CR1]</i>	INSEL4	DMA ch21	T32A ch4 DMA request at match A1 register T32A ch4 DMA request at match C1 register T32A ch5 DMA request at match A1 register T32A ch5 DMA request at match C1 register	✓	✓	✓
	INSEL5	DMA ch22	T32A ch0 DMA request at match B1 register T32A ch1 DMA request at match B1 register T32A ch2 DMA request at match B1 register T32A ch3 DMA request at match B1 register T32A ch4 DMA request at match B1 register T32A ch5 DMA request at match B1 register	✓	✓	✓
	INSEL6	DMA ch23	T32A ch0 DMA request at capture A0 register T32A ch0 DMA request at capture A1 register T32A ch1 DMA request at capture A0 register T32A ch1 DMA request at capture A1 register T32A ch0 DMA request at capture C0 register T32A ch0 DMA request at capture C1 register T32A ch1 DMA request at capture C0 register T32A ch1 DMA request at capture C1 register	✓	✓	✓
	INSEL7	DMA ch24	T32A ch2 DMA request at capture A0 register T32A ch2 DMA request at capture A1 register T32A ch3 DMA request at capture A0 register T32A ch3 DMA request at capture A1 register T32A ch2 DMA request at capture C0 register T32A ch2 DMA request at capture C1 register T32A ch3 DMA request at capture C0 register T32A ch3 DMA request at capture C1 register	✓	✓	✓

Table 2.3 Trigger Selector List for Each Product (2/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)		
				M4H4	M4H2	M4H1
[TSEL0CR2]	INSEL8	DMA ch25	T32A ch4 DMA request at capture A0 register T32A ch4 DMA request at capture A1 register T32A ch5 DMA request at capture A0 register T32A ch5 DMA request at capture A1 register T32A ch4 DMA request at capture C0 register T32A ch4 DMA request at capture C1 register T32A ch5 DMA request at capture C0 register T32A ch5 DMA request at capture C1 register	✓	✓	✓
	INSEL9	DMA ch26	T32A ch0 DMA request at capture B0 register T32A ch0 DMA request at capture B1 register T32A ch1 DMA request at capture B0 register T32A ch1 DMA request at capture B1 register T32A ch2 DMA request at capture B0 register T32A ch2 DMA request at capture B1 register	✓	✓	✓
	INSEL10	DMA ch27	T32A ch3 DMA request at capture B0 register T32A ch3 DMA request at capture B1 register T32A ch4 DMA request at capture B0 register T32A ch4 DMA request at capture B1 register T32A ch5 DMA request at capture B0 register T32A ch5 DMA request at capture B1 register	✓	✓	✓
	INSEL11	DMA ch28	DMAC ch0 transfer completion DMAC ch1 transfer completion DMAC ch8 transfer completion DMAC ch9 transfer completion DMAC ch16 transfer completion DMAC ch17 transfer completion DMAC ch22 transfer completion	✓	✓	✓
[TSEL0CR3]	INSEL12	DMA ch29	DMAC ch2 transfer completion DMAC ch3 transfer completion	✓	-	-
			DMAC ch10 transfer completion DMAC ch11 transfer completion DMAC ch18 transfer completion DMAC ch19 transfer completion DMAC ch23 transfer completion	✓	✓	✓
			PF0 (TRGIN0)	✓	✓	✓
			DMAC ch4 transfer completion DMAC ch5 transfer completion DMAC ch12 transfer completion DMAC ch13 transfer completion DMAC ch20 transfer completion DMAC ch24 transfer completion DMAC ch26 transfer completion	✓	✓	✓
	INSEL13	DMA ch30	PB1 (TRGIN1)	✓	✓	✓
			DMAC ch6 transfer completion DMAC ch14 transfer completion DMAC ch15 transfer completion	✓	-	-
	INSEL14	DMA ch31	DMAC ch7 transfer completion DMAC ch21 transfer completion DMAC ch25 transfer completion DMAC ch27 transfer completion	✓	✓	✓
			PF2 (TRGIN2)	✓	-	-
			PF0 (TRGIN0)	✓	✓	✓
	INSEL15	ADC unit A	PB1 (TRGIN1)	✓	✓	✓
PF2 (TRGIN2)			✓	-	-	
T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger Trigger generation circuit output (TRGGEN)			✓	✓	✓	

Table 2.4 Trigger Selector List for Each Product (3/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)			
				M4H4	M4H2	M4H1	
[TSEL0CR4]	INSEL16	-	-	-	-	-	
	INSEL17	TSPI ch0	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	✓	✓	
	INSEL18	TSPI ch1	PF0 (TRGIN0)	✓	-	-	
			PB1 (TRGIN1)	✓	-	-	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	-	-	
	INSEL19	TSPI ch2	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	✓	✓	
	[TSEL0CR5]	INSEL20	TSPI ch3	PF0 (TRGIN0)	✓	-	-
				PB1 (TRGIN1)	✓	-	-
				PF2 (TRGIN2)	✓	-	-
T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger				✓	-	-	
INSEL21		UART ch0	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	✓	✓	
INSEL22		UART ch1	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	✓	✓	
INSEL23		UART ch2	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	✓	✓	

Table 2.5 Trigger Selector List for Each Product (4/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)			
				M4H4	M4H2	M4H1	
[TSEL0CR6]	INSEL24	UART ch3	PF0 (TRGIN0)	✓	-	-	
			PB1 (TRGIN1)	✓	-	-	
			PF2 (TRGIN2)	✓	-	-	
			T32A ch5 Timer register A1 match trigger T32A ch5 Timer register B1 match trigger T32A ch5 Timer register C1 match trigger	✓	-	-	
	INSEL25	T32A ch0 Timer A	PF0 (TRGIN0)	✓	✓	✓	
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			UART ch0 transmission completion trigger UART ch0 reception completion trigger TSPI ch0 transmit completion TSPI ch0 receive completion	✓	✓	✓	
	INSEL26	T32A ch0 Timer B	T32A ch0 Timer register A0 match trigger T32A ch0 Timer register A1 match trigger T32A ch0 Timer A overflow trigger T32A ch0 Timer A underflow trigger	✓	✓	✓	
			INSEL27	T32A ch0 Timer C	T32A ch5 Timer register C0 match trigger T32A ch5 Timer register C1 match trigger T32A ch5 Timer C overflow trigger T32A ch5 Timer C underflow trigger	✓	✓
	INSEL28	T32A ch1 Timer A			PF0 (TRGIN0)	✓	✓
			PB1 (TRGIN1)	✓	✓	✓	
			PF2 (TRGIN2)	✓	-	-	
			UART ch1 transmission completion trigger UART ch1 reception completion trigger	✓	✓	✓	
			TSPI ch1 transmit completion TSPI ch1 receive completion	✓	-	-	
			INSEL29	T32A ch1 Timer B	T32A ch1 Timer register A0 match trigger T32A ch1 Timer register A1 match trigger T32A ch1 Timer A overflow trigger T32A ch1 Timer A underflow trigger	✓	✓
INSEL30	T32A ch1 Timer C	T32A ch0 Timer register C0 match trigger T32A ch0 Timer register C1 match trigger T32A ch0 Timer C overflow trigger T32A ch0 Timer C underflow trigger			✓	✓	✓
		INSEL31			T32A ch2 Timer A	PF0 (TRGIN0)	✓
			PB1 (TRGIN1)	✓		✓	✓
PF2 (TRGIN2)	✓		-	-			
UART ch2 transmission completion trigger UART ch2 reception completion trigger TSPI ch2 transmit completion TSPI ch2 receive completion	✓		✓	✓			

Table 2.6 Trigger Selector List for Each Product (5/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)			
				M4H4	M4H2	M4H1	
[TSEL0CR8]	INSEL32	T32A ch2 Timer B	T32A ch2 Timer register A0 match trigger T32A ch2 Timer register A1 match trigger T32A ch2 Timer A overflow trigger T32A ch2 Timer A underflow trigger	✓	✓	✓	
	INSEL33	T32A ch2 Timer C	T32A ch1 Timer register C0 match trigger T32A ch1 Timer register C1 match trigger T32A ch1 Timer C overflow trigger T32A ch1 Timer C underflow trigger	✓	✓	✓	
	INSEL34	T32A ch3 Timer A	PF0 (TRGIN0)		✓	✓	✓
			PB1 (TRGIN1)		✓	✓	✓
			PF2 (TRGIN2)		✓	-	-
			UART ch3 transmission completion trigger UART ch3 reception completion trigger TSPI ch3 transmit completion TSPI ch3 receive completion		✓	-	-
			I2C ch0 interrupt EI2C ch0 status interrupt		✓	✓	✓
	INSEL35	T32A ch3 Timer B	T32A ch3 Timer register A0 match trigger T32A ch3 Timer register A1 match trigger T32A ch3 Timer A overflow trigger T32A ch3 Timer A underflow trigger	✓	✓	✓	
	[TSEL0CR9]	INSEL36	T32A ch3 Timer C	T32A ch2 Timer register C0 match trigger T32A ch2 Timer register C1 match trigger T32A ch2 Timer C overflow trigger T32A ch2 Timer C underflow trigger	✓	✓	✓
		INSEL37	T32A ch4 Timer A	PF0 (TRGIN0)		✓	✓
PB1 (TRGIN1)					✓	✓	✓
PF2 (TRGIN2)					✓	-	-
INSEL38		T32A ch4 Timer B	T32A ch4 Timer register A0 match trigger T32A ch4 Timer register A1 match trigger T32A ch4 Timer A overflow trigger T32A ch4 Timer A underflow trigger	✓	✓	✓	
INSEL39		T32A ch4 Timer C	T32A ch3 Timer register C0 match trigger T32A ch3 Timer register C1 match trigger T32A ch3 Timer C overflow trigger T32A ch3 Timer C underflow trigger	✓	✓	✓	

Table 2.7 Trigger Selector List for Each Product (6/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)		
				M4H4	M4H2	M4H1
[TSEL0CR10]	INSEL40	T32A ch5 Timer A	PF0 (TRGIN0)	✓	✓	✓
			PB1 (TRGIN1)	✓	✓	✓
			PF2 (TRGIN2)	✓	-	-
			ADC unit A general purpose trigger interrupt ADC unit A single conversion interrupt ADC unit A continuous conversion interrupt ADC unit A monitor function 0 Interrupt ADC unit A monitor function 1 Interrupt	✓	✓	✓
			T32A ch5 Timer register A0 match trigger T32A ch5 Timer register A1 match trigger T32A ch5 Timer A overflow trigger T32A ch5 Timer A underflow trigger	✓	✓	✓
	INSEL41	T32A ch5 Timer B	T32A ch4 Timer register C0 match trigger T32A ch4 Timer register C1 match trigger T32A ch4 Timer C overflow trigger T32A ch4 Timer C underflow trigger	✓	✓	✓
	INSEL42	T32A ch5 Timer C	T32A ch5 Timer register A0 match trigger T32A ch5 Timer register A1 match trigger T32A ch5 Timer A overflow trigger T32A ch5 Timer A underflow trigger	✓	✓	✓

2.2.2. Operation and Setting

When using TRGSEL, please set an applicable clock enable bit to "1" (clock supply) in fsys supply stop register A (*JCGFSYSENA*), fsys supply stop register B (*JCGFSYSENB*), and fc supply stop registers (*JCGFCEN*).

An applicable register and the bit position vary according to a product. Therefore, the register may not exist with the product. Please refer to "Clock Control and Operation Mode" of the reference manual for the details.

Setting procedure of Trigger selector is as following.

(1) Selection of an input trigger (*JTSEL0CRn* <INSELM>)

Selection of the input trigger used for the trigger source is performed.

Please set up selection of the input trigger by the input trigger subdevice bit (*JTSEL0CRn* <INSELM>) of the control register. (n: register number, m: trigger number)

(2) Selection of edge detection conditions (*JTSEL0CRn* <UPDNm>)

For the input trigger signal which needs edge detection, selection of rising edge or falling edge detection is performed.

Please set up selection of edge detection conditions in the selection bit (*JTSEL0CRn*<UPDNm>) of a control register.

The following shows the trigger signal which needs edge detection.

- External trigger input (TRGIN0, TRGIN1, and TRGIN2)

(3) Selection of a trigger output (*JTSEL0CRn*<OUTSELM>)

Selection of an output without or with edge detection is performed.

Please set up selection of a trigger output in the selection bit (*JTSEL0CRn*<OUTSELM>) of a control register.

(4) Output enable (*JTSEL0CRn*<ENm>)

The output (enable/disable) of the selected trigger signal is chosen.

Please set up selection of output (enable/disable) in the setting bit (*JTSEL0CRn*<ENm>) of a control register. A trigger output will be enabled if *JTSEL0CRn*<ENm> is set as "1".

2.2.3. List of Registers

The table below shows control registers and their addresses.

Peripheral function		Channel/unit	Base address
Trigger selector	TRGSEL	ch0	0x400BB800

Register name		Address (Base+)
Control Register 0	<i>[TSELxCR0]</i>	0x0000
Control Register 1	<i>[TSELxCR1]</i>	0x0004
Control Register 2	<i>[TSELxCR2]</i>	0x0008
Control Register 3	<i>[TSELxCR3]</i>	0x000C
Control Register 4	<i>[TSELxCR4]</i>	0x0010
Control Register 5	<i>[TSELxCR5]</i>	0x0014
Control Register 6	<i>[TSELxCR6]</i>	0x0018
Control Register 7	<i>[TSELxCR7]</i>	0x001C
Control Register 8	<i>[TSELxCR8]</i>	0x0020
Control Register 9	<i>[TSELxCR9]</i>	0x0024
Control Register 10	<i>[TSELxCR10]</i>	0x0028

2.2.4. Details of Registers

The following chapters show the detail of registers. The sign in the functional column parenthesis of each table expresses each function signal name.

2.2.4.1. [TSELxCR0] (Control Register 0)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL3[2:0]	000	R/W	Select the input trigger (DMA ch20) 000: T32A ch2 DMA request at match A1 register (T32A02DMAREQCPA1) 001: T32A ch2 DMA request at match C1 register (T32A02DMAREQCMPC1) 010: T32A ch3 DMA request at match A1 register (T32A03DMAREQCPA1) 011: T32A ch3 DMA request at match C1 register (T32A03DMAREQCMPC1) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN3	0	R/W	Edge detection 0: Rising edge detection 1: falling edge detection
25	OUTSEL3	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN3	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL2[2:0]	000	R/W	Select the input trigger (DMA ch19) 000: T32A ch0 DMA request at match A1 register (T32A00DMAREQCPA1) 001: T32A ch0 DMA request at match C1 register (T32A00DMAREQCMPC1) 010: T32A ch1 DMA request at match A1 register (T32A01DMAREQCPA1) 011: T32A ch1 DMA request at match C1 register (T32A01DMAREQCMPC1) 100: A-PMD ch0 PWM interrupt (INTPWM0) 101: Reserved 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN2	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL2	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN2	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
14:12	INSEL1[2:0]	000	R/W	Select the input trigger (DMA ch18) 000: ADC unit A general purpose trigger DMA request (ADATRG_DMAREQ) 001: ADC unit A single conversion DMA request (ADASGL_DMAREQ) 010: ADC unit A continuous conversion DMA request (ADACNT_DMAREQ) 011: Reserved 100: Reserved 101: Reserved 110: Reserved 111: Reserved
11	-	0	R	Read as "0".
10	UPDN1	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL1	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN1	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL0[2:0]	000	R/W	Select the input trigger (DMA ch7) 000: TSPI ch3 transmit DMA request (TSPI3TX_DMA) 001: Reserved 010: Reserved 011: Reserved 100: Reserved 101: Reserved 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN0	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL0	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN0	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.2. [TSELxCR1] (Control Register1)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL7[2:0]	000	R/W	Select the input trigger (DMA ch24) 000: T32A ch2 DMA request capture A0 (T32A02DMAREQCAPA0) 001: T32A ch2 DMA request capture A1 (T32A02DMAREQCAPA1) 010: T32A ch3 DMA request capture A0 (T32A03DMAREQCAPA0) 011: T32A ch3 DMA request capture A1 (T32A03DMAREQCAPA1) 100: T32A ch2 DMA request capture C0 (T32A02DMAREQCAPC0) 101: T32A ch2 DMA request capture C1 (T32A02DMAREQCAPC1) 110: T32A ch3 DMA request capture C0 (T32A03DMAREQCAPC0) 111: T32A ch3 DMA request capture C1 (T32A03DMAREQCAPC1)
27	-	0	R	Read as "0".
26	UPDN7	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL7	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN7	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL6[2:0]	000	R/W	Select the input trigger (DMA ch23) 000: T32A ch0 DMA request capture A0 (T32A00DMAREQCAPA0) 001: T32A ch0 DMA request capture A1 (T32A00DMAREQCAPA1) 010: T32A ch1 DMA request capture A0 (T32A01DMAREQCAPA0) 011: T32A ch1 DMA request capture A1 (T32A01DMAREQCAPA1) 100: T32A ch0 DMA request capture C0 (T32A00DMAREQCAPC0) 101: T32A ch0 DMA request capture C1 (T32A00DMAREQCAPC1) 110: T32A ch1 DMA request capture C0 (T32A01DMAREQCAPC0) 111: T32A ch1 DMA request capture C1 (T32A01DMAREQCAPC1)
19	-	0	R	Read as "0".
18	UPDN6	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL6	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN6	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL5[2:0]	000	R/W	Select the input trigger (DMA ch22) 000: T32A ch0 DMA request at match B1 register (T32A00DMAREQCMPB1) 001: T32A ch1 DMA request at match B1 register (T32A01DMAREQCMPB1) 010: T32A ch2 DMA request at match B1 register (T32A02DMAREQCMPB1) 011: T32A ch3 DMA request at match B1 register (T32A03DMAREQCMPB1) 100: T32A ch4 DMA request at match B1 register (T32A04DMAREQCMPB1) 101: T32A ch5 DMA request at match B1 register (T32A05DMAREQCMPB1) 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN5	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL5	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN5	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL4[2:0]	000	R/W	Select the input trigger (DMA ch21) 000: T32A ch4 DMA request at match A1 register (T32A04DMAREQCPA1) 001: T32A ch4 DMA request at match C1 register (T32A04DMAREQCMP1) 010: T32A ch5 DMA request at match A1 register (T32A05DMAREQCPA1) 011: T32A ch5 DMA request at match C1 register (T32A05DMAREQCMP1) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN4	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL4	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN4	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.3. [TSELxCR2] (Control Register 2)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL11[2:0]	000	R/W	Select the input trigger (DMA ch28) 000: DMAC ch0 transfer completion (INTDMAATC0) 001: DMAC ch1 transfer completion (INTDMAATC1) 010: DMAC ch8 transfer completion (INTDMAATC8) 011: DMAC ch9 transfer completion (INTDMAATC9) 100: DMAC ch16 transfer completion (INTDMAATC16) 101: DMAC ch17 transfer completion (INTDMAATC17) 110: DMAC ch22 transfer completion (INTDMAATC22) 111: Reserved
27	-	0	R	Read as "0".
26	UPDN11	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL11	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN11	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL10[2:0]	000	R/W	Select the input trigger (DMA ch27) 000: T32A ch3 DMA request capture B0 (T32A03DMAREQCAPB0) 001: T32A ch3 DMA request capture B1 (T32A03DMAREQCAPB1) 010: T32A ch4 DMA request capture B0 (T32A04DMAREQCAPB0) 011: T32A ch4 DMA request capture B1 (T32A04DMAREQCAPB1) 100: T32A ch5 DMA request capture B0 (T32A05DMAREQCAPB0) 101: T32A ch5 DMA request capture B1 (T32A05DMAREQCAPB1) 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN10	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL1	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN10	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL9[2:0]	000	R/W	Select the input trigger (DMA ch26) 000: T32A ch0 DMA request capture B0 (T32A00DMAREQCAPB0) 001: T32A ch0 DMA request capture B1 (T32A00DMAREQCAPB1) 010: T32A ch1 DMA request capture B0 (T32A01DMAREQCAPB0) 011: T32A ch1 DMA request capture B1 (T32A01DMAREQCAPB1) 100: T32A ch2 DMA request capture B0 (T32A00DMAREQCAPB0) 101: T32A ch2 DMA request capture B1 (T32A01DMAREQCAPB1) 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN9	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL9	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN9	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL8[2:0]	000	R/W	Select the input trigger (DMA ch25) 000: T32A ch4 DMA request capture A0 (T32A04DMAREQCAPA0) 001: T32A ch4 DMA request capture A1 (T32A04DMAREQCAPA1) 010: T32A ch5 DMA request capture A0 (T32A05DMAREQCAPA0) 011: T32A ch5 DMA request capture A1 (T32A05DMAREQCAPA1) 100: T32A ch4 DMA request capture C0 (T32A04DMAREQCAPC0) 101: T32A ch4 DMA request capture C1 (T32A04DMAREQCAPC1) 110: T32A ch5 DMA request capture C0 (T32A05DMAREQCAPC0) 111: T32A ch5 DMA request capture C1 (T32A05DMAREQCAPC1)
3	-	0	R	Read as "0".
2	UPDN8	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL8	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN8	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.4. [TSELxCR3] (Control Register 3)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL15[2:0]	000	R/W	Select the input trigger (ADC unit A general purpose trigger) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Trigger generation circuit output (TRGGEN) 111: Reserved
27	-	0	R	Read as "0".
26	UPDN15	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL15	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN15	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL14[2:0]	000	R/W	Select the input trigger (DMA ch31) 000: DMAC ch6 transfer completion (INTDMAATC6) 001: DMAC ch7 transfer completion (INTDMAATC7) 010: DMAC ch14 transfer completion (INTDMAATC14) 011: DMAC ch15 transfer completion (INTDMAATC15) 100: DMAC ch21 transfer completion (INTDMAATC21) 101: DMAC ch25 transfer completion (INTDMAATC25) 110: DMAC ch27 transfer completion (INTDMAATC27) 111: PF2 (TRGIN2)
19	-	0	R	Read as "0".
18	UPDN14	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL14	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN14	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL13[2:0]	000	R/W	Select the input trigger (DMA ch30) 000: DMAC ch4 transfer completion (INTDMAATC4) 001: DMAC ch5 transfer completion (INTDMAATC5) 010: DMAC ch12 transfer completion (INTDMAATC12) 011: DMAC ch13 transfer completion (INTDMAATC13) 100: DMAC ch20 transfer completion (INTDMAATC20) 101: DMAC ch24 transfer completion (INTDMAATC24) 110: DMAC ch26 transfer completion (INTDMAATC26) 111: PB1 (TRGIN1)
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN13	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL13	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN13	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL12[2:0]	000	R/W	Select the input trigger (DMA ch29) 000: DMAC ch2 transfer completion (INTDMAATC2) 001: DMAC ch3 transfer completion (INTDMAATC3) 010: DMAC ch10 transfer completion (INTDMAATC10) 011: DMAC ch11 transfer completion (INTDMAATC11) 100: DMAC ch18 transfer completion (INTDMAATC18) 101: DMAC ch19 transfer completion (INTDMAATC19) 110: DMAC ch23 transfer completion (INTDMAATC23) 111: PF0 (TRGIN0)
3	-	0	R	Read as "0".
2	UPDN12	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL12	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN12	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.5. [TSELxCR4] (Control Register 4)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL19[2:0]	000	R/W	Select the input trigger (TSPI ch2 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN19	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL19	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN19	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL18[2:0]	000	R/W	Select the input trigger (TSPI ch1 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN18	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL18	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN18	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL17[2:0]	000	R/W	Select the input trigger (TSPI ch0 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN17	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL17	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN17	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL16[2:0]	000	R/W	Write as "000".
3	-	0	R	Read as "0".
2	UPDN16	0	R/W	Write as "0".
1	OUTSEL16	0	R/W	Write as "0".
0	EN16	0	R/W	Write as "0".

2.2.4.6. [TSELxCR5] (Control Register 5)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL23[2:0]	000	R/W	Select the input trigger (UART ch2 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN23	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL23	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN23	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL22[2:0]	000	R/W	Select the input trigger (UART ch1 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN22	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL22	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN22	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL21[2:0]	000	R/W	Select the input trigger (UART ch0 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN21	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL21	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN21	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL20[2:0]	000	R/W	Select the input trigger (TSPI ch3 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN20	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL20	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN20	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.7. [TSELxCR6] (Control Register 6)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL27[2:0]	000	R/W	Select the input trigger (T32A ch0 Timer C internal trigger input) 000: T32A ch5 Timer register C0 match trigger (T32A05TRGOUTCMPC0) 001: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 010: T32A ch5 Timer C overflow trigger (T32A05TRGOUTOFC) 011: T32A ch5 Timer C underflow trigger (T32A05TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN27	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL27	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN27	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL26[2:0]	000	R/W	Select the input trigger (T32A ch0 Timer B internal trigger input) 000: T32A ch0 Timer register A0 match trigger (T32A00TRGOUTCMPA0) 001: T32A ch0 Timer register A1 match trigger (T32A00TRGOUTCMPA1) 010: T32A ch0 Timer A overflow trigger (T32A00TRGOUTOFA) 011: T32A ch0 Timer A underflow trigger (T32A00TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN26	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL26	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN26	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL25[2:0]	000	R/W	Select the input trigger (T32A ch0 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: UART ch0 transmission completion trigger (UART0TXTRG) 100: UART ch0 reception completion trigger (UART0RXTRG) 101: TSPI ch0 transmit completion (TSPI0TXEND) 110: TSPI ch0 receive completion (TSPI0RXEND) 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN25	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL25	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN25	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL24[2:0]	000	R/W	Select the input trigger (UART ch3 trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 100: T32A ch5 Timer register B1 match trigger (T32A05TRGOUTCMPB1) 101: T32A ch5 Timer register C1 match trigger (T32A05TRGOUTCMPC1) 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN24	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL24	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN24	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.8. [TSELxCR7] (Control Register 7)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL31[2:0]	000	R/W	Select the input trigger (T32A ch2 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: UART ch2 transmission completion trigger (UART2TXTRG) 100: UART ch2 reception completion trigger (UART2RXTRG) 101: TSPI ch2 transmit completion (TSPI2TXEND) 110: TSPI ch2 receive completion (TSPI2RXEND) 111: Reserved
27	-	0	R	Read as "0".
26	UPDN31	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL31	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN31	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL30[2:0]	000	R/W	Select the input trigger (T32A ch1 Timer C internal trigger input) 000: T32A ch0 Timer register C0 match trigger (T32A00TRGOUTCMPC0) 001: T32A ch0 Timer register C1 match trigger (T32A00TRGOUTCMPC1) 010: T32A ch0 Timer C overflow trigger (T32A00TRGOUTOFC) 011: T32A ch0 Timer C underflow trigger (T32A00TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN30	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL30	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN30	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL29[2:0]	000	R/W	Select the input trigger (T32A ch1 Timer B internal trigger input) 000: T32A ch1 Timer register A0 match trigger (T32A01TRGOUTCMPA0) 001: T32A ch1 Timer register A1 match trigger (T32A01TRGOUTCMPA1) 010: T32A ch1 Timer A overflow trigger (T32A01TRGOUTOFA) 011: T32A ch1 Timer A underflow trigger (T32A01TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN29	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL29	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN29	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL28[2:0]	000	R/W	Select the input trigger (T32A ch1 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: UART ch1 transmission completion trigger (UART1TXTRG) 100: UART ch1 reception completion trigger (UART1RXTRG) 101: TSPI ch1 transmit completion (TSPI1TXEND) 110: TSPI ch1 receive completion (TSPI1RXEND) 111: Reserved
3	-	0	R	Read as "0".
2	UPDN28	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL28	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN28	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.9. [TSELxCR8] (Control Register 8)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL35[2:0]	000	R/W	Select the input trigger (T32A ch3 Timer B internal trigger input) 000: T32A ch3 Timer register A0 match trigger (T32A03TRGOUTCMPA0) 001: T32A ch3 Timer register A1 match trigger (T32A03TRGOUTCMPA1) 010: T32A ch3 Timer A overflow trigger (T32A03TRGOUTOFA) 011: T32A ch3 Timer A underflow trigger (T32A03TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN35	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL35	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN35	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL34[2:0]	000	R/W	Select the input trigger (T32A ch3 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: UART ch3 transmission completion trigger (UART3TXTRG) 100: UART ch3 reception completion trigger (UART3RXTRG) 101: TSPI ch3 transmit completion (TSPI3TXEND) 110: TSPI ch3 receive completion (TSPI3RXEND) 111: I2C ch0 interrupt (INTI2C0)/EI2C ch0 status interrupt (INTI2C0ST)
19	-	0	R	Read as "0".
18	UPDN34	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL34	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN34	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL33[2:0]	000	R/W	Select the input trigger (T32A ch2 Timer C internal trigger input) 000: T32A ch1 Timer register C0 match trigger (T32A01TRGOUTCMPC0) 001: T32A ch1 Timer register C1 match trigger (T32A01TRGOUTCMPC1) 010: T32A ch1 Timer C overflow trigger (T32A01TRGOUTOFC) 011: T32A ch1 Timer C underflow trigger (T32A01TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN33	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL33	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN33	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL32[2:0]	000	R/W	Select the input trigger (T32A ch2 Timer B internal trigger input) 000: T32A ch2 Timer register A0 match trigger (T32A02TRGOUTCMPA0) 001: T32A ch2 Timer register A1 match trigger (T32A02TRGOUTCMPA1) 010: T32A ch2 Timer A overflow trigger (T32A02TRGOUTOFA) 011: T32A ch2 Timer A underflow trigger (T32A02TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN32	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL32	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN32	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.10. [TSELxCR9] (Control Register 9)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as "0".
30:28	INSEL39[2:0]	000	R/W	Select the input trigger (T32A ch4 Timer C internal trigger input) 000: T32A ch3 Timer register C0 match trigger (T32A03TRGOUTCMPC0) 001: T32A ch3 Timer register C1 match trigger (T32A03TRGOUTCMPC1) 010: T32A ch3 Timer C overflow trigger (T32A03TRGOUTOFC) 011: T32A ch3 Timer C underflow trigger (T32A03TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
27	-	0	R	Read as "0".
26	UPDN39	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
25	OUTSEL39	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN39	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as "0".
22:20	INSEL38[2:0]	000	R/W	Select the input trigger (T32A ch4 Timer B internal trigger input) 000: T32A ch4 Timer register A0 match trigger (T32A04TRGOUTCMPA0) 001: T32A ch4 Timer register A1 match trigger (T32A04TRGOUTCMPA1) 010: T32A ch4 Timer A overflow trigger (T32A04TRGOUTOFA) 011: T32A ch4 Timer A underflow trigger (T32A04TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN38	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL38	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN38	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL37[2:0]	000	R/W	Select the input trigger (T32A ch4 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: Reserved 100: Reserved 101: Reserved 110: Reserved 111: Reserved
11	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
10	UPDN37	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL37	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN37	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL36[2:0]	000	R/W	Select the input trigger (T32A ch3 Timer C internal trigger input) 000: T32A ch2 Timer register C0 match trigger (T32A02TRGOUTCMPC0) 001: T32A ch2 Timer register C1 match trigger (T32A02TRGOUTCMPC1) 010: T32A ch2 Timer C overflow trigger (T32A02TRGOUTOFC) 011: T32A ch2 Timer C underflow trigger (T32A02TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
3	-	0	R	Read as "0".
2	UPDN36	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL36	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN36	0	R/W	Trigger output control 0: Disable 1: Enable

2.2.4.11. [TSELxCR10] (Control Register 10)

Bit	Bit symbol	After reset	Type	Function
31:23	-	0	R	Read as "0".
22:20	INSEL42[2:0]	000	R/W	Select the input trigger (T32A ch5 Timer C internal trigger input) 000: T32A ch4 Timer register C0 match trigger (T32A04TRGOUTCMPC0) 001: T32A ch4 Timer register C1 match trigger (T32A04TRGOUTCMPC1) 010: T32A ch4 Timer C overflow trigger (T32A04TRGOUTOFC) 011: T32A ch4 Timer C underflow trigger (T32A04TRGOUTUFC) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
19	-	0	R	Read as "0".
18	UPDN42	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL42	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN42	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as "0".
14:12	INSEL41[2:0]	000	R/W	Select the input trigger (T32A ch5 Timer B internal trigger input) 000: T32A ch5 Timer register A0 match trigger (T32A05TRGOUTCMPA0) 001: T32A ch5 Timer register A1 match trigger (T32A05TRGOUTCMPA1) 010: T32A ch5 Timer A overflow trigger (T32A05TRGOUTOFA) 011: T32A ch5 Timer A underflow trigger (T32A05TRGOUTUFA) 100: Reserved 101: Reserved 110: Reserved 111: Reserved
11	-	0	R	Read as "0".
10	UPDN41	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL41	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN41	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as "0".
6:4	INSEL40[2:0]	000	R/W	Select the input trigger (T32A ch5 Timer A internal trigger input) 000: PF0 (TRGIN0) 001: PB1 (TRGIN1) 010: PF2 (TRGIN2) 011: ADC unit A general purpose trigger interrupt (INTADATRG) 100: ADC unit A single conversion interrupt (INTADASGL) 101: ADC unit A continuous conversion interrupt (INTADACNT) 110: ADC unit A monitor function 0 Interrupt (INTADACP0) 111: ADC unit A monitor function 1 Interrupt (INTADACP1)
3	-	0	R	Read as "0".

Bit	Bit symbol	After reset	Type	Function
2	UPDN40	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL40	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN40	0	R/W	Trigger output control 0: Disable 1: Enable

2.3. Direct Memory Access Controller (DMAC)

2.3.1. Built-in Unit

Following table shows the built-in unit of each product.

Table 2.8 DMAC Built-in Unit

Product name	DMAC unit (✓: Available, - : N/A)
	Unit A
M4H4	✓
M4H2	✓
M4H1	✓

2.3.2. DMA Request Table

Following table shows the DMA request List.

The channel which has a register name in the trigger selector column of a table should choose the request used by a trigger selector.

"-" in the table does not have an applicable function.

Table 2.9 DMA Request Table (1/4)

ch No	Single transfer		Trigger selector	Burst transfer	
		Signal name			Signal name
0	TSPI ch0 reception	TSPI0RX_DMA	-	TSPI ch0 reception	TSPI0RX_DMA
1	TSPI ch0 transmission	TSPI0TX_DMA	-	TSPI ch0 transmission	TSPI0TX_DMA
2	TSPI ch1 reception	TSPI1RX_DMA	-	TSPI ch1 reception	TSPI1RX_DMA
3	TSPI ch1 transmission	TSPI1TX_DMA	-	TSPI ch1 transmission	TSPI1TX_DMA
4	TSPI ch2 reception	TSPI2RX_DMA	-	TSPI ch2 reception	TSPI2RX_DMA
5	TSPI ch2 transmission	TSPI2TX_DMA	-	TSPI ch2 transmission	TSPI2TX_DMA
6	TSPI ch3 reception	TSPI3RX_DMA	-	TSPI ch3 reception	TSPI3RX_DMA
7	TSPI ch3 transmission	TSPI3TX_DMA	[TSEL0CR0] <INSEL0>	TSPI ch3 transmission	TSPI3TX_DMA
8	UART ch0 reception	UART0RX_DMAREQ	-	UART ch0 reception	UART0RX_DMAREQ
9	UART ch0 transmission	UART0TX_DMAREQ	-	UART ch0 transmission	UART0TX_DMAREQ
10	UART ch1 reception	UART1RX_DMAREQ	-	UART ch1 reception	UART1RX_DMAREQ
11	UART ch1 transmission	UART1TX_DMAREQ	-	UART ch1 transmission	UART1TX_DMAREQ
12	UART ch2 reception	UART2RX_DMAREQ	-	UART ch2 reception	UART2RX_DMAREQ
13	UART ch2 transmission	UART2TX_DMAREQ	-	UART ch2 transmission	UART2TX_DMAREQ
14	UART ch3 reception	UART3RX_DMAREQ	-	UART ch3 reception	UART3RX_DMAREQ
15	UART ch3 transmission	UART3TX_DMAREQ	-	UART ch3 transmission	UART3TX_DMAREQ
16	-	-		I2C/EI2C ch0 reception	I2C0ARXDMAREQ/ I2C0RXDMAREQ

Note: The ch7 is set by trigger source of DMA request. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

Table 2.10 DMA Request Table (2/4)

ch No	Single transfer		Burst transfer		
		Signal name	Trigger selector		Signal name
17	-	-		I2C/EI2C ch0 transmission	I2C0ATXDMAREQ/ I2C0TXDMAREQ
18	-	-	[TSEL0CR0] <INSEL1>	ADC unit A general purpose trigger	ADATRG_DMAREQ
				ADC unit A single conversion	ADASGL_DMAREQ
				ADC unit A continue conversion	ADACNT_DMAREQ
19	-	-	[TSEL0CR0] <INSEL2>	T32A ch0 compare A1 matched	T32A00DMAREQCMPA1
				T32A ch0 compare C1 matched	T32A00DMAREQCMPC1
				T32A ch1 compare A1 matched	T32A01DMAREQCMPA1
				T32A ch1 compare C1 matched	T32A01DMAREQCMPC1
				A-PMD ch0 PWM interrupt	INTPWM0
20	-	-	[TSEL0CR0] <INSEL3>	T32A ch2 compare A1 matched	T32A02DMAREQCMPA1
				T32A ch2 compare C1 matched	T32A02DMAREQCMPC1
				T32A ch3 compare A1 matched	T32A03DMAREQCMPA1
				T32A ch3 compare C1 matched	T32A03DMAREQCMPC1
21	-	-	[TSEL0CR1] <INSEL4>	T32A ch4 compare A1 matched	T32A04DMAREQCMPA1
				T32A ch4 compare C1 matched	T32A04DMAREQCMPC1
				T32A ch5 compare A1 matched	T32A05DMAREQCMPA1
				T32A ch5 compare C1 matched	T32A05DMAREQCMPC1
22	-	-	[TSEL0CR1] <INSEL5>	T32A ch0 compare B1 matched	T32A00DMAREQCMPB1
				T32A ch1 compare B1 matched	T32A01DMAREQCMPB1
				T32A ch2 compare B1 matched	T32A02DMAREQCMPB1
				T32A ch3 compare B1 matched	T32A03DMAREQCMPB1
				T32A ch4 compare B1 matched	T32A04DMAREQCMPB1
				T32A ch5 compare B1 matched	T32A05DMAREQCMPB1
23	-	-	[TSEL0CR1] <INSEL6>	T32A ch0 capture A0	T32A00DMAREQCAPA0
				T32A ch0 capture A1	T32A00DMAREQCAPA1
				T32A ch1 capture A0	T32A01DMAREQCAPA0
				T32A ch1 capture A1	T32A01DMAREQCAPA1
				T32A ch0 capture C0	T32A00DMAREQCAPC0
				T32A ch0 capture C1	T32A00DMAREQCAPC1
				T32A ch1 capture C0	T32A01DMAREQCAPC0
				T32A ch1 capture C1	T32A01DMAREQCAPC1
24	-	-	[TSEL0CR1] <INSEL7>	T32A ch2 capture A0	T32A02DMAREQCAPA0
				T32A ch2 capture A1	T32A02DMAREQCAPA1
				T32A ch3 capture A0	T32A03DMAREQCAPA0
				T32A ch3 capture A1	T32A03DMAREQCAPA1
				T32A ch2 capture C0	T32A02DMAREQCAPC0
				T32A ch2 capture C1	T32A02DMAREQCAPC1
				T32A ch3 capture C0	T32A03DMAREQCAPC0
				T32A ch3 capture C1	T32A03DMAREQCAPC1

Note: The ch18 to 24 are set by trigger source of DMA request. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)"

Table 2.11 DMA Request Table (3/4)

ch No	Single transfer		Burst transfer		
		Signal name	Trigger selector		Signal name
25	-	-	[TSEL0CR2] <INSEL8>	T32A ch4 capture A0	T32A04DMAREQCAPA0
				T32A ch4 capture A1	T32A04DMAREQCAPA1
				T32A ch5 capture A0	T32A05DMAREQCAPA0
				T32A ch5 capture A1	T32A05DMAREQCAPA1
				T32A ch4 capture C0	T32A04DMAREQCAPC0
				T32A ch4 capture C1	T32A04DMAREQCAPC1
				T32A ch5 capture C0	T32A05DMAREQCAPC0
				T32A ch5 capture C1	T32A05DMAREQCAPC1
26	-	-	[TSEL0CR2] <INSEL9>	T32A ch0 capture B0	T32A00DMAREQCAPB0
				T32A ch0 capture B1	T32A00DMAREQCAPB1
				T32A ch1 capture B0	T32A01DMAREQCAPB0
				T32A ch1 capture B1	T32A01DMAREQCAPB1
				T32A ch2 capture B0	T32A02DMAREQCAPB0
				T32A ch2 capture B1	T32A02DMAREQCAPB1
27	-	-	[TSEL0CR2] <INSEL10>	T32A ch3 capture B0	T32A03DMAREQCAPB0
				T32A ch3 capture B1	T32A03DMAREQCAPB1
				T32A ch4 capture B0	T32A04DMAREQCAPB0
				T32A ch4 capture B1	T32A04DMAREQCAPB1
				T32A ch5 capture B0	T32A05DMAREQCAPB0
				T32A ch5 capture B1	T32A05DMAREQCAPB1
28	-	-	[TSEL0CR2] <INSEL11>	DMAC ch0 transfer completion	INTDMAATC0
				DMAC ch1 transfer completion	INTDMAATC1
				DMAC ch8 transfer completion	INTDMAATC8
				DMAC ch9 transfer completion	INTDMAATC9
				DMAC ch16 transfer completion	INTDMAATC16
				DMAC ch17 transfer completion	INTDMAATC17
				DMAC ch22 transfer completion	INTDMAATC22
29	-	-	[TSEL0CR3] <INSEL12>	DMAC ch2 transfer completion	INTDMAATC2
				DMAC ch3 transfer completion	INTDMAATC3
				DMAC ch10 transfer completion	INTDMAATC10
				DMAC ch11 transfer completion	INTDMAATC11
				DMAC ch18 transfer completion	INTDMAATC18
				DMAC ch19 transfer completion	INTDMAATC19
				DMAC ch23 transfer completion	INTDMAATC23
				TRGIN0 (PF0)	TRGIN0

Note: The ch25 to 29 are set by trigger source of DMA request. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)

Table 2.12 DMA Request Table (4/4)

ch no.	Single transfer		Burst transfer		
	Signal name	TRG selector	Signal name	Signal name	
30	-	-	[TSEL0CR3] <INSEL13>	DMAC ch4 transfer completion	INTDMAATC4
				DMAC ch5 transfer completion	INTDMAATC5
				DMAC ch12 transfer completion	INTDMAATC12
				DMAC ch13 transfer completion	INTDMAATC13
				DMAC ch20 transfer completion	INTDMAATC20
				DMAC ch24 transfer completion	INTDMAATC24
				DMAC ch26 transfer completion	INTDMAATC26
				TRGIN1 (PB1)	TRGIN1
31	-	-	[TSEL0CR3] <INSEL14>	DMAC ch6 transfer completion	INTDMAATC6
				DMAC ch7 transfer completion	INTDMAATC7
				DMAC ch14 transfer completion	INTDMAATC14
				DMAC ch15 transfer completion	INTDMAATC15
				DMAC ch21 transfer completion	INTDMAATC21
				DMAC ch25 transfer completion	INTDMAATC25
				DMAC ch27 transfer completion	INTDMAATC27
				TRGIN2 (PF2)	TRGIN2

Note: The ch30 and ch31 are set by trigger source of DMA request. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)"

2.4. 32-bit Timer Event Counter (T32A)

2.4.1. Built-in Channel

Following table shows the T32A built-in channel of each product.

Table 2.13 T32A Built-in Channel

Product	T32A channel (✓: Available, - : N/A)					
	ch0	ch1	ch2	ch3	ch4	ch5
M4H4	✓	✓	✓	✓	✓	✓
M4H2	✓	✓	✓	✓	✓	✓
M4H1	✓	✓	✓	✓	✓	✓

2.4.2. Functional Pins

The functional pins are assigned to the port of the following tables.

Please do not use simultaneously the same function currently assigned to two or more pins.

There is also a channel which does not have functional pins depending on a product.

Table 2.14 T32A Functional Pin and Port (1/2)

Channel	Functional pin (Signal name)		Port	Ports for products (✓: Available, - : N/A)		
				M4H4	M4H2	M4H1
ch0	T32A00INA0	Input	PK1	✓	✓	✓
	T32A00INA1	Input	-	-	-	-
	T32A00OUTA	Output	PK0	✓	✓	✓
	T32A00INB0	Input	-	-	-	-
	T32A00INB1	Input	-	-	-	-
	T32A00OUTB	Output	-	-	-	-
	T32A00INC0	Input	PK1	✓	✓	✓
	T32A00INC1	Input	-	-	-	-
	T32A00OUTC	Output	PK0	✓	✓	✓
ch1	T32A01INA0	Input	PA1	✓	✓	-
	T32A01INA1	Input	PA2	✓	-	-
	T32A01OUTA	Output	PA2	✓	-	-
	T32A01INB0	Input	PA0	✓	✓	✓
	T32A01INB1	Input	-	-	-	-
	T32A01OUTB	Output	PA0	✓	✓	✓
	T32A01INC0	Input	PA1	✓	✓	-
	T32A01INC1	Input	PA2	✓	-	-
	T32A01OUTC	Output	PA2	✓	-	-
ch2	T32A02INA0	Input	PG1	✓	✓	✓
	T32A02INA1	Input	PG2	✓	✓	✓
	T32A02OUTA	Output	PG0	✓	✓	✓
	T32A02INB0	Input	-	-	-	-
	T32A02INB1	Input	-	-	-	-
	T32A02OUTB	Output	-	-	-	-
	T32A02INC0	Input	PG1	✓	✓	✓
	T32A02INC1	Input	PG2	✓	✓	✓
	T32A02OUTC	Output	PG0	✓	✓	✓

Table 2.15 T32A Functional Pins and Port (2/2)

Channel	Functional pin (Signal name)		Port	Ports for products (✓: Available, - : N/A)		
				M4H4	M4H2	M4H1
ch3	T32A03INA0	Input	PC1	✓	-	-
	T32A03INA1	Input	PC2	✓	-	-
	T32A03OUTA	Output	PC0	✓	✓	✓
	T32A03INB0	Input	-	-	-	-
	T32A03INB1	Input	-	-	-	-
	T32A03OUTB	Output	-	-	-	-
	T32A03INC0	Input	PC1	✓	-	-
	T32A03INC1	Input	PC2	✓	-	-
	T32A03OUTC	Output	PC0	✓	✓	✓
ch4	T32A04INA0	Input	PF1	✓	-	-
	T32A04INA1	Input	PF2	✓	-	-
	T32A04OUTA	Output	PF0	✓	✓	✓
	T32A04INB0	Input	-	-	-	-
	T32A04INB1	Input	-	-	-	-
	T32A04OUTB	Output	-	-	-	-
	T32A04INC0	Input	PF1	✓	-	-
	T32A04INC1	Input	PF2	✓	-	-
	T32A04OUTC	Output	PF0	✓	✓	✓
ch5	T32A05INA0	Input	PB1	✓	✓	✓
	T32A05INA1	Input	-	-	-	-
	T32A05OUTA	Output	PB0	✓	✓	✓
	T32A05INB0	Input	-	-	-	-
	T32A05INB1	Input	-	-	-	-
	T32A05OUTB	Output	PB1	✓	✓	✓
	T32A05INC0	Input	PB1	✓	✓	✓
	T32A05INC1	Input	-	-	-	-
	T32A05OUTC	Output	PB0	✓	✓	✓

2.4.3. Clock for Prescaler

The 32-bit timer event counter uses the clock of the following table as a prescaler clock.

Table 2.16 T32A Clock for Prescaler

Clock
$\Phi T0$

2.4.4. Internal Signal Connection Specification

2.4.4.1. Capture Trigger Signal Connection

In the 32-bit timer event counter, capture trigger signal is connected to signals of the following table.

The input trigger signal which has a register name in the trigger selector column of the following table should choose the input trigger used by a trigger selector.

Table 2.17 T32A Capture Trigger Connection (1/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch0	Timer A	T32A00TRGINAPHCK (Other timer output)	-	-	-
		T32A00TRGINAPCK (Internal trigger input)	[TSEL0CR6] <INSEL25>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
				PF2 (TRGIN2)	TRGIN2
				UART ch0 transmission completion trigger	UART0TXTRG
				UART ch0 reception completion trigger	UART0RXTRG
				TSPI ch0 transmit completion	TSPI0TXEND
	TSPI ch0 receive completion	TSPI0RXEND			
	Timer B	T32A00TRGINBPHCK (Other timer output)	-	T32A ch0 timer A output	T32A00OUTA
		T32A00TRGINBPKC (other timer input)	[TSEL0CR6] <INSEL26>	T32A ch0 timer register A0 match trigger	T32A00TRGOUTCMPA0
				T32A ch0 timer register A1 match trigger	T32A00TRGOUTCMPA1
				T32A ch0 timer A overflow trigger	T32A00TRGOUTOFA
	T32A ch0 timer A underflow trigger	T32A00TRGOUTUFA			
	Timer C	T32A00TRGINCPHCK (Other timer output)	-	-	-
		T32A00TRGINCPCK (Internal trigger input)	[TSEL0CR6] <INSEL27>	T32A ch5 timer register C0 match trigger	T32A05TRGOUTCMPC0
T32A ch5 timer register C1 match trigger				T32A05TRGOUTCMPC1	
T32A ch5 timer C overflow trigger				T32A05TRGOUTOFC	
T32A ch5 timer C underflow trigger	T32A05TRGOUTUFC				
ch1	Timer A	T32A01TRGINAPHCK (Other timer output)	-	-	-
		T32A01TRGINAPCK (Internal trigger input)	[TSEL0CR7] <INSEL28>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
				PF2 (TRGIN2)	TRGIN2
				UART ch1 transmission completion trigger	UART1TXTRG
				UART ch1 reception completion trigger	UART1RXTRG
				TSPI ch1 transmit completion	TSPI1TXEND
	TSPI ch1 receive completion	TSPI1RXEND			
	Timer B	T32A01TRGINBPHCK (Other timer output)	-	T32A ch1 timer A output	T32A01OUTA
		T32A01TRGINBPKC (Internal trigger input)	[TSEL0CR7] <INSEL29>	T32A ch1 timer register A0 match trigger	T32A01TRGOUTCMPA0
				T32A ch1 timer register A1 match trigger	T32A01TRGOUTCMPA1
				T32A ch1 timer A overflow trigger	T32A01TRGOUTOFA
	T32A ch1 timer A underflow trigger	T32A01TRGOUTUFA			
	Timer C	T32A01TRGINCPHCK (Other timer output)	-	-	-
		T32A00TRGINCPCK (Internal trigger input)	[TSEL0CR7] <INSEL30>	T32A ch0 timer register C0 match trigger	T32A00TRGOUTCMPC0
T32A ch0 timer register C1 match trigger				T32A00TRGOUTCMPC1	
T32A ch0 timer C overflow trigger				T32A00TRGOUTOFC	
T32A ch0 timer C underflow trigger	T32A00TRGOUTUFC				

Note: [TSEL0CRn]<INSELM> is set the internal trigger of trigger source by trigger selector. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

Table 2.18 T32A Capture Trigger Connection (2/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch2	Timer A	T32A02TRGINAPHCK (Other timer output)	-	-	-
		T32A02TRGINAPCK (Internal trigger input)	[TSEL0CR7] <INSEL31>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
				PF2 (TRGIN2)	TRGIN2
				UART ch2 transmission completion trigger	UART2TXTRG
				UART ch2 reception completion trigger	UART2RXTRG
				TSPI ch2 transmit completion	TSPI2TXEND
	TSPI ch2 receive completion	TSPI2RXEND			
	Timer B	T32A02TRGINBPHCK (Other timer output)	-	T32A ch2 timer A output	T32A02OUTA
		T32A02TRGINBPKCK (Internal trigger input)	[TSEL0CR8] <INSEL32>	T32A ch2 timer register A0 match trigger	T32A02TRGOUTCMPA0
				T32A ch2 timer register A1 match trigger	T32A02TRGOUTCMPA1
				T32A ch2 timer A overflow trigger	T32A02TRGOUTOFA
	T32A ch2 timer A underflow trigger			T32A02TRGOUTUFA	
	Timer C	T32A02TRGINCPHCK (Other timer output)	-	-	-
		T32A02TRGINCPCK (Internal trigger input)	[TSEL0CR8] <INSEL33>	T32A ch1 timer register C0 match trigger	T32A01TRGOUTCMPC0
				T32A ch1 timer register C1 match trigger	T32A01TRGOUTCMPC1
T32A ch1 timer C overflow trigger				T32A01TRGOUTOFC	
T32A ch1 timer C underflow trigger	T32A01TRGOUTUFC				
ch3	Timer A	T32A03TRGINAPHCK (Other timer output)	-	-	-
		T32A03TRGINAPCK (Internal trigger input)	[TSEL0CR8] <INSEL34>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
				PF2 (TRGIN2)	TRGIN2
				UART ch3 transmission completion trigger	UART3TXTRG
				UART ch3 reception completion trigger	UART3RXTRG
				TSPI ch3 transmit completion	TSPI3TXEND
	TSPI ch3 receive completion	TSPI3RXEND			
	I2C ch0 interrupt/ EI2C ch0 status interrupt	INTI2C0/INTI2C0ST			
	Timer B	T32A03TRGINBPHCK (Other timer output)	-	T32A ch3 timer A output	T32A03OUTA
		T32A03TRGINBPKCK (Internal trigger input)	[TSEL0CR8] <INSEL35>	T32A ch3 timer register A0 match trigger	T32A03TRGOUTCMPA0
				T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
				T32A ch3 timer A overflow trigger	T32A03TRGOUTOFA
	T32A ch3 timer A underflow trigger			T32A03TRGOUTUFA	
	Timer C	T32A03TRGINCPHCK (Other timer output)	-	-	-
		T32A03TRGINCPCK (Internal trigger input)	[TSEL0CR9] <INSEL36>	T32A ch2 timer register C0 match trigger	T32A02TRGOUTCMPC0
T32A ch2 timer register C1 match trigger				T32A02TRGOUTCMPC1	
T32A ch2 timer C overflow trigger				T32A02TRGOUTOFC	
T32A ch2 timer C underflow trigger	T32A02TRGOUTUFC				

Note: [TSEL0CRn]<INSELn> is set the internal trigger of trigger source by trigger selector. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

Table 2.19 T32A Capture Trigger Connection (3/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch4	Timer A	T32A04TRGINAPHCK (Other timer output)	-	-	-
		T32A04TRGINAPCK (Internal trigger input)	[TSEL0CR9] <INSEL37>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
	PF2 (TRGIN2)			TRGIN2	
	Timer B	T32A04TRGINBPHCK (Other timer output)	-	T32A ch4 timer A output	T32A04OUTA
		T32A04TRGINBPKCK (Internal trigger input)	[TSEL0CR9] <INSEL38>	T32A ch4 timer register A0 match trigger	T32A04TRGOUTCMPA0
				T32A ch4 timer register A1 match trigger	T32A04TRGOUTCMPA1
				T32A ch4 timer A overflow trigger	T32A04TRGOUTOFA
	T32A ch4 timer A underflow trigger			T32A04TRGOUTUFA	
	Timer C	T32A04TRGINCPHCK (Other timer output)	-	-	-
		T32A04TRGINCPCK (Internal trigger input)	[TSEL0CR9] <INSEL39>	T32A ch3 timer register C0 match trigger	T32A03TRGOUTCMPC0
				T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
				T32A ch3 timer C overflow trigger	T32A03TRGOUTOFC
	T32A ch3 timer C underflow trigger			T32A03TRGOUTUFC	
	ch5	Timer A	T32A05TRGINAPHCK (Other timer output)	-	-
T32A05TRGINAPCK (Internal trigger input)			[TSEL0CR10] <INSEL40>	PF0 (TRGIN0)	TRGIN0
				PB1 (TRGIN1)	TRGIN1
				PF2 (TRGIN2)	TRGIN2
				ADC unit A general purpose trigger interrupt	INTADATRG
				ADC unit A single conversion interrupt	INTADASGL
				ADC unit A continuous conversion interrupt	INTADACNT
				ADC unit A monitor function 0 interrupt	INTADACP0
		ADC unit A monitor function 1 interrupt		INTADACP1	
Timer B		T32A05TRGINBPHCK (Other timer output)	-	T32A ch5 timer A output	T32A05OUTA
		T32A05TRGINBPKCK (Internal trigger input)	[TSEL0CR10] <INSEL41>	T32A ch5 timer register A0 match trigger	T32A05TRGOUTCMPA0
				T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
				T32A ch5 timer A overflow trigger	T32A05TRGOUTOFA
T32A ch5 timer A underflow trigger				T32A05TRGOUTUFA	
Timer C		T32A05TRGINCPHCK (Other timer output)	-	-	-
	T32A05TRGINCPCK (Internal trigger input)	[TSEL0CR10] <INSEL42>	T32A ch4 timer register C0 match trigger	T32A04TRGOUTCMPC0	
			T32A ch4 timer register C1 match trigger	T32A04TRGOUTCMPC1	
			T32A ch4 timer C overflow trigger	T32A04TRGOUTOFC	
T32A ch4 timer C underflow trigger			T32A04TRGOUTUFC		

Note: [TSEL0CRn]<INSELM> is set the internal trigger of trigger source by trigger selector. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

2.4.4.2. Synchronous Control Connection

In the 32-bit timer event counter, as shown in the following tables, synchronous connection of the timer is carried out within the same channel.

Table 2.20 T32A Synchronous Control Connection Specifications

Channel	Timer	Output		Timer	Input	
		Function	Signal name		Function	Signal name
ch0	Timer A	Synchronous start output A	T32A00SYNCSTARTOUTA	Timer B	Synchronous start B	T32A00SYNCSTARTB
		Synchronous stop output A	T32A00SYNCSTOPOUTA		Synchronous stop B	T32A00SYNCSTOPB
		Synchronous Reload output A	T32A00SYNCRELOADOUTA		Synchronous Reload B	T32A00SYNCRELOADB
ch1	Timer A	Synchronous start output A	T32A01SYNCSTARTOUTA	Timer B	Synchronous start B	T32A01SYNCSTARTB
		Synchronous stop output A	T32A01SYNCSTOPOUTA		Synchronous stop B	T32A01SYNCSTOPB
		Synchronous Reload output A	T32A01SYNCRELOADOUTA		Synchronous Reload B	T32A01SYNCRELOADB
ch2	Timer A	Synchronous start output A	T32A02SYNCSTARTOUTA	Timer B	Synchronous start B	T32A02SYNCSTARTB
		Synchronous stop output A	T32A02SYNCSTOPOUTA		Synchronous stop B	T32A02SYNCSTOPB
		Synchronous Reload output A	T32A02SYNCRELOADOUTA		Synchronous Reload B	T32A02SYNCRELOADB
ch3	Timer A	Synchronous start output A	T32A03SYNCSTARTOUTA	Timer B	Synchronous start B	T32A03SYNCSTARTB
		Synchronous stop output A	T32A03SYNCSTOPOUTA		Synchronous stop B	T32A03SYNCSTOPB
		Synchronous Reload output A	T32A03SYNCRELOADOUTA		Synchronous Reload B	T32A03SYNCRELOADB
ch4	Timer A	Synchronous start output A	T32A04SYNCSTARTOUTA	Timer B	Synchronous start B	T32A04SYNCSTARTB
		Synchronous stop output A	T32A04SYNCSTOPOUTA		Synchronous stop B	T32A04SYNCSTOPB
		Synchronous Reload output A	T32A04SYNCRELOADOUTA		Synchronous Reload B	T32A04SYNCRELOADB
ch5	Timer A	Synchronous start output A	T32A05SYNCSTARTOUTA	Timer B	Synchronous start B	T32A05SYNCSTARTB
		Synchronous stop output A	T32A05SYNCSTOPOUTA		Synchronous stop B	T32A05SYNCSTOPB
		Synchronous Reload output A	T32A05SYNCRELOADOUTA		Synchronous Reload B	T32A05SYNCRELOADB

2.4.5. Pulse Counter List for Each Product

In the 32-bit timer event counter, as shown in the following tables, correspondence of a pulse counter changes with products.

Table 2.21 T32A Pulse Counter List for Each Product

Channel	M4H4	M4H2	M4H1
ch0	1-phase pulse count		
ch1	2-phase pulse count 1-phase pulse count	1-phase pulse count	-
ch2	2-phase pulse count 1-phase pulse count		
ch3	2-phase pulse count 1-phase pulse count	-	
ch4	2-phase pulse count 1-phase pulse count	-	
ch5	1-phase pulse count		

2.4.6. DMA Request

In the 32-bit timer event counter, DMA request are shown in the following table.

What has the statement of a register name in the trigger selector column of a table should choose the request used by a trigger selector.

Table 2.22 T32A DMA Request (1/2)

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch0	DMA request at match A1 register	T32A00DMAREQCMPA1	[TSEL0CR0] <INSEL2>	19	-	✓
	DMA request at match C1 register	T32A00DMAREQCMPC1				
	DMA request at match B1 register	T32A00DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A00DMAREQCAPA0	[TSEL0CR1] <INSEL6>	23	-	✓
	DMA request at capture A1 register	T32A00DMAREQCAPA1				
	DMA request at capture C0 register	T32A00DMAREQCAPC0				
	DMA request at capture C1 register	T32A00DMAREQCAPC1				
	DMA request at capture B0 register	T32A00DMAREQCAPB0	[TSEL0CR2] <INSEL9>	26	-	✓
DMA request at capture B1 register	T32A00DMAREQCAPB1					
ch1	DMA request at match A1 register	T32A01DMAREQCMPA1	[TSEL0CR0] <INSEL2>	19	-	✓
	DMA request at match C1 register	T32A01DMAREQCMPC1				
	DMA request at match B1 register	T32A01DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A01DMAREQCAPA0	[TSEL0CR1] <INSEL6>	23	-	✓
	DMA request at capture A1 register	T32A01DMAREQCAPA1				
	DMA request at capture C0 register	T32A01DMAREQCAPC0				
	DMA request at capture C1 register	T32A01DMAREQCAPC1				
	DMA request at capture B0 register	T32A01DMAREQCAPB0	[TSEL0CR2] <INSEL9>	26	-	✓
DMA request at capture B1 register	T32A01DMAREQCAPB1					

Note: ✓: Available, -: N/A

Table 2.23 T32A DMA Request (2/2)

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch2	DMA request at match A1 register	T32A02DMAREQCMPA1	[TSEL0CR0] <INSEL3>	20	-	✓
	DMA request at match C1 register	T32A02DMAREQCMPA1				
	DMA request at match B1 register	T32A02DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A02DMAREQCAPA0				
	DMA request at capture A1 register	T32A02DMAREQCAPA1	[TSEL0CR1] <INSEL7>	24	-	✓
	DMA request at capture C0 register	T32A02DMAREQCAPC0				
	DMA request at capture C1 register	T32A02DMAREQCAPC1				
	DMA request at capture B0 register	T32A02DMAREQCAPB0	[TSEL0CR2] <INSEL9>	26	-	✓
DMA request at capture B1 register	T32A02DMAREQCAPB1					
ch3	DMA request at match A1 register	T32A03DMAREQCMPA1	[TSEL0CR0] <INSEL3>	20	-	✓
	DMA request at match C1 register	T32A03DMAREQCMPA1				
	DMA request at match B1 register	T32A03DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A03DMAREQCAPA0				
	DMA request at capture A1 register	T32A03DMAREQCAPA1	[TSEL0CR1] <INSEL7>	24	-	✓
	DMA request at capture C0 register	T32A03DMAREQCAPC0				
	DMA request at capture C1 register	T32A03DMAREQCAPC1				
	DMA request at capture B0 register	T32A03DMAREQCAPB0	[TSEL0CR2] <INSEL10>	27	-	✓
DMA request at capture B1 register	T32A03DMAREQCAPB1					
ch4	DMA request at match A1 register	T32A04DMAREQCMPA1	[TSEL0CR1] <INSEL4>	21	-	✓
	DMA request at match C1 register	T32A04DMAREQCMPA1				
	DMA request at match B1 register	T32A04DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A04DMAREQCAPA0				
	DMA request at capture A1 register	T32A04DMAREQCAPA1	[TSEL0CR2] <INSEL8>	25	-	✓
	DMA request at capture C0 register	T32A04DMAREQCAPC0				
	DMA request at capture C1 register	T32A04DMAREQCAPC1				
	DMA request at capture B0 register	T32A04DMAREQCAPB0	[TSEL0CR2] <INSEL10>	27	-	✓
DMA request at capture B1 register	T32A04DMAREQCAPB1					
ch5	DMA request at match A1 register	T32A05DMAREQCMPA1	[TSEL0CR1] <INSEL4>	21	-	✓
	DMA request at match C1 register	T32A05DMAREQCMPA1				
	DMA request at match B1 register	T32A05DMAREQCMPB1	[TSEL0CR1] <INSEL5>	22	-	✓
	DMA request at capture A0 register	T32A05DMAREQCAPA0				
	DMA request at capture A1 register	T32A05DMAREQCAPA1	[TSEL0CR2] <INSEL8>	25	-	✓
	DMA request at capture C0 register	T32A05DMAREQCAPC0				
	DMA request at capture C1 register	T32A05DMAREQCAPC1				
	DMA request at capture B0 register	T32A05DMAREQCAPB0	[TSEL0CR2] <INSEL10>	27	-	✓
DMA request at capture B1 register	T32A05DMAREQCAPB1					

Note: ✓: Available, -: N/A

2.4.7. Internal Signal Connection Specification

Every count interrupt (INTT32AxEVRYC) does not correspond in the TPM4H Group(1).

2.5. Universal Asynchronous Receiver Transmitter Circuit (UART)

2.5.1. Built-in Channel

Following table show the UART built-in channel of each product.

In TPM4H Group(1), Maximum Communication speed of UART is 5 Mbps.

Table 2.24 UART Built-in Channel

Product	UART channel (✓: Available, - : N/A)			
	ch0	ch1	ch2	ch3
M4H4	✓	✓	✓	✓
M4H2	✓	✓	✓	-
M4H1	✓	✓	✓	-

2.5.2. Function Pin and Port

The functional pins are assigned to the port of the following tables.

Please do not use simultaneously the same function currently assigned to two or more pins.

There is also a channel which does not have functional pins depending on a product.

Table 2.25 UART Functional Pin and Port

Channel	Function Pin (signal name)		Port	Products list (✓: Available, - : N/A)		
				M4H4	M4H2	M4H1
ch0	UT0TXDA	Output	PK1	✓	✓	✓
			PK3	✓	✓	✓
			PK0	✓	✓	✓
			PK2	✓	✓	✓
	UT0RXD	Input	PK0	✓	✓	✓
			PK2	✓	✓	✓
			PK1	✓	✓	✓
			PK3	✓	✓	✓
ch1	UT1TXDA	Output	PA0	✓	✓	-
			PA1	✓	✓	-
			PB1	✓	✓	✓
			PB0	✓	✓	✓
	UT1RXD	Input	PA1	✓	✓	-
			PA0	✓	✓	-
			PB0	✓	✓	✓
			PB1	✓	✓	✓
ch2	UT2TXDA	Output	PG0	✓	✓	✓
	UT2RXD	Input	PG1	✓	✓	✓
ch3	UT3TXDA	Output	PC0	✓	-	-
			PC1	✓	-	-
	UT3RXD	Input	PC1	✓	-	-
			PC0	✓	-	-

2.5.3. Half Clock Mode Support

Half clock mode of the UART corresponds to 1-pin mode only.

2.5.4. Clock for Prescaler

The UART use the clock of the following table as a prescaler clock.

Table 2.26 UART Clock for Prescaler

Clock
$\Phi T0$

2.5.5. DMA Request

The following table shows the DMA request in the UART.

"-" in the table does not have an applicable function.

Table 2.27 UART DMA Request

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch0	UART ch0 reception	UART0RX_DMAREQ	-	8	✓	✓
	UART ch0 transmission	UART0TX_DMAREQ		9	✓	✓
ch1	UART ch1 reception	UART1RX_DMAREQ	-	10	✓	✓
	UART ch1 transmission	UART1TX_DMAREQ		11	✓	✓
ch2	UART ch2 reception	UART2RX_DMAREQ	-	12	✓	✓
	UART ch2 transfer	UART2TX_DMAREQ		13	✓	✓
ch3	UART ch3 reception	UART3RX_DMAREQ	-	14	✓	✓
	UART ch3 transmission	UART3TX_DMAREQ	-	15	✓	✓

Note: ✓: Available, -: N/A

2.5.6. Internal Signal Connection Specification

2.5.6.1. Trigger Transfer Signal Connection

Transfer function of the UART has a trigger signal control.

A trigger control signal is selected with the trigger source and use it as the following table.

Table 2.28 UART Trigger Transfer Signal Connection

Channel		Trigger source		
Signal	Trigger selector	Input trigger signal		Signal name
ch0	UART0TRGIN	[TSEL0CR5] <INSEL21>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch1	UART1TRGIN	[TSEL0CR5] <INSEL22>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch2	UART2TRGIN	[TSEL0CR5] <INSEL23>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch3	UART3TRGIN	[TSEL0CR6] <INSEL24>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1

Note: [TSEL0CRn]<INSELm> is set the internal trigger of trigger source by trigger selector. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

2.5.6.2. T32A Connection

In the UART, there is a signal connected with the peripheral function inside in addition to this as shown in the following table.

Table 2.29 UART Inside Connection List: Output

Channel	Function output		Trigger selector	Output destination	
		Signal name			Signal name
ch0	UART ch0 transmission completion trigger output	UART0TXTRG	[TSEL0CR6] <INSEL25>	T32A ch0 Timer A	T32A00TRGINAPCK
	UART ch0 reception completion trigger output	UART0RXTRG			
ch1	UART ch1 transmission completion trigger output	UART1TXTRG	[TSEL0CR7] <INSEL28>	T32A ch1 Timer A	T32A01TRGINAPCK
	UART ch1 reception completion trigger output	UART1RXTRG			
ch2	UART ch2 transmission completion trigger output	UART2TXTRG	[TSEL0CR7] <INSEL31>	T32A ch2 Timer A	T32A02TRGINAPCK
	UART ch2 reception completion trigger output	UART2RXTRG			
ch3	UART ch3 transmission completion trigger output	UART3TXTRG	[TSEL0CR8] <INSEL34>	T32A ch3 Timer A	T32A03TRGINAPCK
	UART ch3 reception completion trigger output	UART3RXTRG			

2.6. Serial Peripheral Interface (TSPI)

2.6.1. Built-in Channel

The following table shows the TSPI built-in channel of each product.

In TPM4H Group(1), Maximum Communication speed of TSPI is 20 Mbps.

Table 2.30 TSPI Built-in Channel

Product	TSPI channel (✓: Available, -: N/A)			
	ch0	ch1	ch2	ch3
M4H4	✓	✓	✓	✓
M4H2	✓	-	✓	-
M4H1	✓	-	✓	-

2.6.2. Function Pin and Port

The function pins are assigned to the port of the following tables.

Please do not use simultaneously the same function currently assigned to two or more pins.

There is also a channel which does not have functional pins depending on a product.

Table 2.31 TSPI Function Pin and Port

Channel	function pin (signal name)		Port	Products list (✓: Available, -: N/A)		
				M4H4	M4H2	M4H1
ch0	TSPI0SCK	I/O	PK4	✓	✓	✓
	TSPI0TXD	Output	PK3	✓	✓	✓
	TSPI0RXD	Input	PK2	✓	✓	✓
ch1	TSPI1SCK	I/O	PA2	✓	-	-
	TSPI1TXD	Output	PA0	✓	-	-
	TSPI1RXD	Input	PA1	✓	-	-
ch2	TSPI2SCK	I/O	PG2	✓	✓	✓
	TSPI2TXD	Output	PG0	✓	✓	✓
	TSPI2RXD	Input	PG1	✓	✓	✓
ch3	TSPI3SCK	I/O	PC2	✓	-	-
	TSPI3TXD	Output	PC0	✓	-	-
	TSPI3RXD	Input	PC1	✓	-	-

Note: In TPM4H Group(1), there is no TSPIxCSIN pin, TSPIxCS0 pin, TSPIxCS1 pin, TSPIxCS2 pin and TSPIxCS3 pin.

2.6.3. Transfer Mode of Each Product

The transfer modes which can be used with the product as TSPI is shown in the following tables differ.

Table 2.32 TSPI Mode List

Channel	Support Mode		
	M4H4	M4H2	M4H1
ch0	SIO mode		
ch1	SIO mode	-	-
ch2	SIO mode		
ch3	SIO mode	-	-

2.6.4. [TSPIxCR2]<RXDLY> Set Value

TMPM4H Group(1) products setting value of TSPI control register 2 ([TSPIxCR2]<RXDLY[2:0]>) is as follows:

Table 2.33 [TSPIxCR2]<RXDLY[2:0]> Set Value

Bit	Bit symbol	After reset	Function
18:16	<RXDLY[2:0]>	001	000: fsys ≤ 40MHz 001: fsys > 40MHz

2.6.5. Clock for Prescaler

The TSPI use the clock of the following table as a prescaler clock.

Table 2.34 TSPI Clock for Prescaler

Clock
ΦT0

2.6.6. DMA Request

The following table shows the DMA request in the TSPI.

"-" in the table does not have an applicable function.

Table 2.35 TSPI DMA Request

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch0	TSPI ch0 reception	TSPI0RX_DMA	-	0	✓	✓
	TSPI ch0 transmission	TSPI0TX_DMA		1	✓	✓
ch1	TSPI ch1 reception	TSPI1RX_DMA	-	2	✓	✓
	TSPI ch1 transmission	TSPI1TX_DMA		3	✓	✓
ch2	TSPI ch2 reception	TSPI2RX_DMA	-	4	✓	✓
	TSPI ch2 transmission	TSPI2TX_DMA	-	5	✓	✓
ch3	TSPI ch3 reception	TSPI3RX_DMA	-	6	✓	✓
	TSPI ch3 transmission	TSPI3TX_DMA	[TSEL0CR0] <INSEL0>	7	✓	✓

Note: ✓: Available, -: N/A

2.6.7. Internal Signal Connection Specification

2.6.7.1. Trigger Transfer Signal Connection

Transfer function of the TSPI has a trigger signal control.

A trigger control signal is selected with the trigger source and use it as the following table.

Table 2.36 TSPI Trigger Transfer

Channel		Trigger source		
Signal name	Trigger selector	Input trigger signal		Signal name
ch0	TSPI0TRG (input)	[TSEL0CR4] <INSEL17>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch1	TSPI1TRG (input)	[TSEL0CR4] <INSEL18>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch2	TSPI2TRG (input)	[TSEL0CR4] <INSEL19>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1
ch3	TSPI3TRG (input)	[TSEL0CR5] <INSEL20>	PF0 (TRGIN0)	TRGIN0
			PB1 (TRGIN1)	TRGIN1
			PF2 (TRGIN2)	TRGIN2
			T32A ch5 timer register A1 match trigger	T32A05TRGOUTCMPA1
			T32A ch5 timer register B1 match trigger	T32A05TRGOUTCMPB1
			T32A ch5 timer register C1 match trigger	T32A05TRGOUTCMPC1

Note: [TSEL0CR4]<INSELm>, [TSEL0CR5]<INSELm> is set the trigger source by trigger selector. For the detail of connection, refer to the "2.2. Trigger Selector (TRGSEL)".

2.6.7.2. T32A Connection

In the TSPI, there is a signal connected with the peripheral function inside in addition to this as shown in the following table.

Table 2.37 TSPI Inside Connection (Output)

Channel	Function output		Trigger selector	Output destination	
		Signal name			Signal name
ch0	TSPI ch0 transmission completion	TSPI0TXEND	[TSEL0CR6] <INSEL25>	T32A ch0 Timer A	T32A00TRGINAPCK
	TSPI ch0 reception completion	TSPI0RXEND			
ch1	TSPI ch1 transmission completion	TSPI1TXEND	[TSEL0CR7] <INSEL28>	T32A ch1 Timer A	T32A01TRGINAPCK
	TSPI ch1 reception completion	TSPI1RXEND			
ch2	TSPI ch2 transmission completion	TSPI2TXEND	[TSEL0CR7] <INSEL31>	T32A ch2 Timer A	T32A02TRGINAPCK
	TSPI ch2 reception completion	TSPI2RXEND			
ch3	TSPI ch3 transmission completion	TSPI3TXEND	[TSEL0CR8] <INSEL34>	T32A ch3 Timer A	T32A03TRGINAPCK
	TSPI ch3 reception completion	TSPI3RXEND			

2.7. I²C Interface (I2C)

The I2C and EI2C must be used exclusively.

2.7.1. Built-in Channel

The following table show the I2C built-in channel of each product.

The I²C interface of TPM4H Group(1) products supports "Standard Mode" and "Fast Mode".

Table 2.38 I2C Built-in Channel

Product	I2C channel (✓: Available, - : N/A)
	ch0
M4H4	✓
M4H2	✓
M4H1	✓

2.7.2. Function Pin and Port

The functional pins are assigned to the port of the following tables.

Table 2.39 I2C Function Pin and Port

Channel	Function pin (signal name)		Port	Product list (✓: Available, - : N/A)		
				M4H4	M4H2	M4H1
ch0	I2C0SCL	I/O	PB1	✓	✓	✓
	I2C0SDA	I/O	PB0	✓	✓	✓

2.7.3. Clock for Prescaler

The I2C use the clock of the following table as a prescaler clock.

Table 2.40 I2C Clock for Prescaler

Clock
fsys

2.7.4. DMA Request

The following table shows the DMA request in the I²C interface.

"-" in the table does not have an applicable function.

Table 2.41 I2C DMA Request

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch0	I2C ch0 reception	I2C0RXDMAREQ	-	16	-	✓
	I2C ch0 transmission	I2C0TXDMAREQ	-	17	-	✓

Note: ✓: Available, -: N/A

2.8. I²C Interface Version A (EI2C)

Use I2C and EI2C exclusively.

2.8.1. Built-in Channel

The following table shows the I²C interface version A built-in channel of each product.

In the TPM4H Group(1), the I²C interface version A supports Standard mode, Fast mode, and Fast mode plus.

Table 2.42 EI2C Built-in Channel

Product	EI2C channel (✓: Available, -: N/A)
	ch0
M4H4	✓
M4H2	✓
M4H1	✓

2.8.2. Function Pin and Port

The function pins are assigned to the port of the following table.

Table 2.43 EI2C Function Pin and Port

Channel	Function pin		Port	Product list (✓: Available, -: N/A)		
				M4H4	M4H2	M4H1
ch0	EI2C0SCL	I/O	PB1	✓	✓	✓
	EI2C0SDA	I/O	PB0	✓	✓	✓

2.8.3. Base Address

Table 2.44 shows the EI2C base addresses for TPM4H Group(1).

Note: The EI2C base address is different from that described in the reference manual.

Table 2.44 EI2C Base Address

Function name	Channel / unit	Base address
I ² C Interface	EI2C ch0	0x400A0100

2.8.4. Clock for Prescaler

The I²C interface version A uses the clock of the following table as a prescaler clock.

Table 2.45 I2C Clock for Prescaler

Clock
f _{sys}

2.8.5. DMA Request

The following table shows the DMA request in the I²C interface version A.

Table 2.46 I²C DMA Request

Channel	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
ch0	I ² C ch0 reception	I2C0ARXDMAREQ	-	16	-	✓
	I ² C ch0 transmission	I2C0ATXDMAREQ	-	17	-	✓

Note: ✓: Available, -: N/A

2.9. 12-bit Analog to Digital Converter (ADC)

2.9.1. Built-in Unit

The following table shows the ADC built-in unit of each product.

Table 2.47 ADC Built-in Unit

Product	ADC unit (✓: Available, - : N/A)
	Unit A
M4H4	✓
M4H2	✓
M4H1	✓

2.9.2. Corresponding Registers

The following table shows the correspondence registers for TPM4H Group(1).

Table 2.48 ADC Corresponding Registers

Unit	General purpose start-up factor program register	Conversion result storage register
A	[ADATSET0] to [ADATSET23]	[ADAREG0] to [ADAREG23]

2.9.3. Function Pin and Port

The functional pins are assigned to the port of the following tables.

There is also a channel which does not have functional pins depending on a product.

Table 2.49 ADC Function Pin and Port

Input channel	Function pin (signal name)	Port	Product list (✓: Available, - : N/A)		
			M4H4	M4H2	M4H1
ch0	-	-	-	-	-
ch1	AINA01	PE4	✓	-	-
ch2	AINA02	PE3	✓	-	-
ch3	AINA03	PE2	✓	✓	-
ch4	AINA04	PE1	✓	✓	✓
ch5	AINA05	PE0	✓	✓	✓
ch6	AINA06	PD6	✓	✓	✓
ch7	AINA07	PD5	✓	✓	✓
ch8	AINA08	PD4	✓	✓	✓
ch9	AINA09	PD3	✓	✓	✓
ch10	AINA10	PD2	✓	✓	✓
ch11	AINA11	PD0	✓	✓	✓
ch12	AINA12	PD1	✓	✓	✓
ch13	-	-	-	-	-
ch14	-	-	-	-	-
ch15	-	-	-	-	-
ch16	VREFH	-	✓	✓	✓
ch17	VREFL (Note2)	-	✓	✓	✓
ch18	Reference power (Note3)	-	✓	✓	✓

Note1: Ch16 to ch18 are connected internally for self-check function support.

Note2: The VREFL is connected to AVSS.

Note3: For reference power supply, refer to the electrical characteristics of "TPM4H Group(1) Data Sheet".

2.9.4. Conversion Clock of ADC

The 12-bit ADC uses the clock of the following table as a conversion clock.

Table 2.50 Conversion Clock of ADC

Clock
ADCLK

2.9.5. Setting Value of Mode Setting Register 2

For the setting value of mode setting register 2 (*[ADxMOD2]*), set the values in the table below.

Table 2.51 Setting Value of ADC Mode Setting Register 2

Register name	Value
<i>[ADxMOD2]</i> <MOD2[31:0]>	0x00000000

2.9.6. Trimming Setting Register Setting Value

For the trimming setting register (*[ADxTRM]*), set the values in the table below.

Table 2.52 Setting Value of Trimming Setting Register

Register name	Conditions	Value
<i>[ADxTRM]</i> <TRM[31:0]>	$4.5V \leq AVDD5 \leq 5.5V$	0x0000E000
	$2.7V \leq AVDD5 < 4.5V$	0x00000000

2.9.7. DMA Request

The following table shows the DMA request in the 12-bit ADC.

Table 2.53 ADC DMA Request

Unit	Request	Signal name	Trigger selector	DMA request channel		
				Single transfer	Burst transfer	
A	General purpose trigger DMA request	ADATRGM_DMAREQ	<i>[TSEL0CR0]</i> <INSEL1>	18	-	✓
	Single conversion DMA request	ADASGL_DMAREQ			-	✓
	Continuous conversion DMA request	ADACNT_DMAREQ			-	✓

Note: ✓: Available, -: N/A

2.9.8. Internal Signal Connection Specification

Figure 2.2 shows the connections between the 12-bit analog to digital converter and peripheral functions.

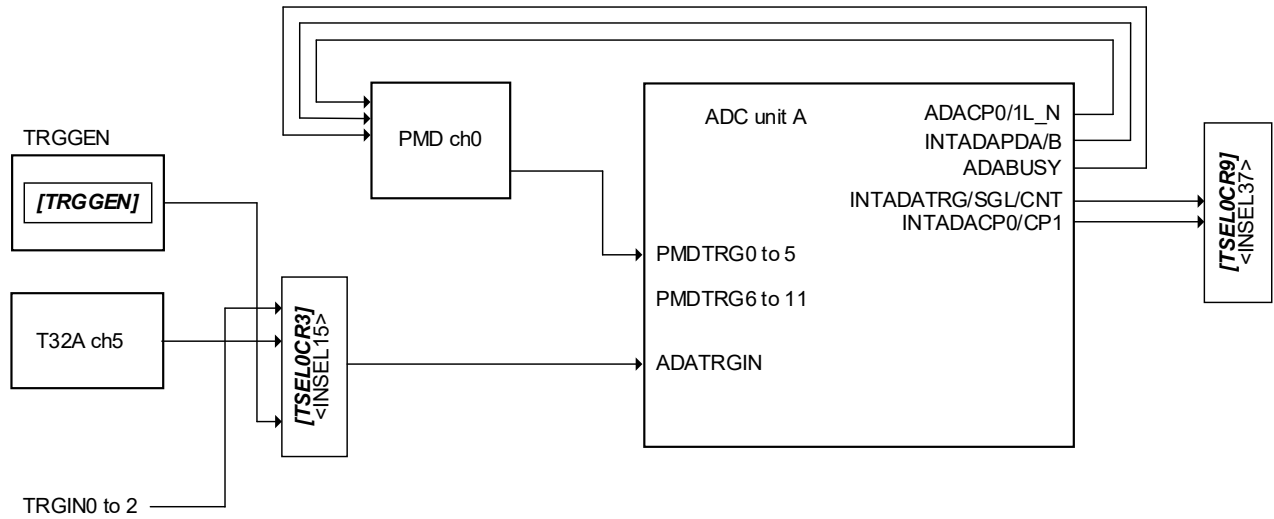


Figure 2.2 Connecting of ADC and Peripheral Functions

2.9.8.1. Startup Trigger Connection Specifications

The 12-bit analog to digital converter can start AD conversion by trigger signals. The trigger signal connections are shown in Table 2.54.

If a register is listed in the Trigger selector column, select the trigger in the listed register. "-" in the table does not have an applicable function.

There are two types of triggers: A-PMD output triggers and general purpose triggers.

General-purpose trigger sources include terminal inputs, timer outputs, and the output of the trigger generation circuit (TRGGEN). TRGGEN is a circuit that controls the trigger signal by register setting. See "2.9.9 Trigger Generation Circuit (TRGGEN)" for details.

Table 2.54 ADC Startup Trigger Connection Specifications

Unit	Function input		Trigger selector	Input source		
		Signal name			Signal name	
A	PMD0 PMD trigger 0	PMDTRG0	-	A-PMD ch0	PMD0TRG0	
	PMD0 PMD trigger 1	PMDTRG1	-		PMD0TRG1	
	PMD0 PMD trigger 2	PMDTRG2	-		PMD0TRG2	
	PMD0 PMD trigger 3	PMDTRG3	-		PMD0TRG3	
	PMD0 PMD trigger 4	PMDTRG4	-		PMD0TRG4	
	PMD0 PMD trigger 5	PMDTRG5	-		PMD0TRG5	
	PMD1 PMD trigger 0	PMDTRG6	-	-	-	
	PMD1 PMD trigger 1	PMDTRG7	-		-	
	PMD1 PMD trigger 2	PMDTRG8	-		-	
	PMD1 PMD trigger 3	PMDTRG9	-		-	
	PMD1 PMD trigger 4	PMDTRG10	-		-	
	PMD1 PMD trigger 5	PMDTRG11	-		-	
	General purpose trigger	ADATRGIN		[TSEL0CR3] <INSEL15>	PF0 (TRGIN0)	TRGIN0
					PB1 (TRGIN1)	TRGIN1
					PF2 (TRGIN2)	TRGIN2
					T32A ch5	T32A05TRGOUTCMPA1
T32A05TRGOUTCMPB1						
T32A05TRGOUTCMPC1						
TRGGEN	TRGGEN					

Note: [TSEL0CR3]<INSEL15> is set the trigger source by trigger selector. For the detail of connection, refer to the "2.2 Trigger Selector (TRGSEL)".

2.9.8.2. Other Connection

The output of the 12-bit analog to digital converter is connected to peripheral functions as shown in Table 2.55.

"-" in the table does not have an applicable function.

For T32A and A-PMD, refer to respective reference manuals.

Table 2.55 ADC Inside Connection: Output

Unit	Function output	Signal name	Trigger selector	Output destination	Signal name
A	General purpose trigger interrupt	INTADATRG	[TSEL0CR10] <INSEL40>	T32A ch5 Timer A	T32A05TRGINAPCK
	Single conversion interrupt	INTADASGL			
	Continuous conversion interrupt	INTADACNT			
	Monitor function 0 interrupt	INTADACP0			
	Monitor function 1 interrupt	INTADACP1			
	Monitor function 0 output for PMD protect function	ADACP0L_N	-	A-PMD ch0	ADACMP0L_N
	Monitor function 1 output for PMD protect function	ADACP1L_N	-		ADACMP1L_N
	PMD conversion end interrupt A	INTADAPDA	-		INTADAPDA
	PMD conversion end interrupt B	INTADAPDB	-		INTADAPDB
	AD conversion flag	ADABUSY	-		ADABUSY

2.9.9. Trigger Generation Circuit (TRGGEN)

2.9.9.1. Function and Operation

TRGGEN is a circuit that generates a general purpose trigger for 12-bit analog to digital converters.

To generate a general purpose trigger, set $[TRGGEN]<GEN>$ to "1". After the generation of a general purpose trigger, clear $[TRGGEN]<GEN>$ to "0" to enable the next general purpose trigger generation.

2.9.9.2. Registers

The control registers and their addresses are shown as follows:

Peripheral function		Channel/unit	Base address
Trigger Generation Circuit	TRG	-	0x400FF000

Register name	Address (Base+)	
Trigger Generation Register	$[TRGGEN]$	0x0000

2.9.9.3. $[TRGGEN]$ (Trigger Generation Register)

Bit	Bit symbol	After reset	Type	Function
31:1	-	0	R	Read as "0".
0	GEN	0	R/W	Generate general purpose trigger for ADC 0: Preparation for generating general purpose trigger 1: Generate general purpose trigger

2.10. Advanced Programmable Motor Control Circuit (A-PMD)

2.10.1. Built-in Channel

The following table shows the A-PMD built-in channel of each product.

Table 2.56 A-PMD Built-in Channel

Product	A-PMD channel (✓: Available, - : N/A)
	ch0
M4H4	✓
M4H2	✓
M4H1	✓

2.10.2. Function Pin and Port

The functional pins are assigned to the port of the following tables.

Table 2.57 A-PMD Function Pin

Channel	Function pin		Signal name	Port	Product list (✓: Available, - : N/A)		
					M4H4	M4H2	M4H1
ch0	XO0	Output	XO0	PJ1	✓	✓	✓
	YO0	Output	YO0	PJ3	✓	✓	✓
	ZO0	Output	ZO0	PJ5	✓	✓	✓
	UO0	Output	UO0	PJ0	✓	✓	✓
	VO0	Output	VO0	PJ2	✓	✓	✓
	WO0	Output	WO0	PJ4	✓	✓	✓
	EMG0	Input	EMG0	PD6	✓	✓	✓
				PH2	✓	✓	✓
				PJ6	✓	✓	✓
	OVV0	Input	OVV0	PJ7	✓	-	-
	Debug output	Output	PMD0DBG	PB0	✓	✓	✓
				PG0	✓	✓	✓
				PJ0	✓	✓	✓

2.10.3. DMA Request

The following table shows the DMA request in the A-PMD.

Table 2.58 A-PMD DMA Request

Channel	Request	Signal name	Trigger selector	DMA request channel		
					Single transfer	Burst transfer
ch0	A-PMD ch0 PWM interrupt	INTPWM0	[TSEL0CR0] <INSEL2>	19	-	✓

Note: ✓: Available, - : N/A

2.10.4. Internal Signal Connection Specification

2.10.4.1. Other Connection

In the A-PMD, there is a signal connected with the peripheral function inside in addition to this as shown in the following table.

Table 2.59 A-PMD Inside Connection List: Input

Channel	Function input	Signal name	Input source	Signal name
ch0	ADC conversion completion interrupt A	INTADAPDA	ADC unit A	INTADAPDA
	ADC conversion completion interrupt B	INTADAPDB		INTADAPDB
	ADC conversion signal	ADABUSY		ADABUSY
	ADC monitor function 0 (OVV detection)	ADACMP0L_N		ADACP0L_N
	ADC monitor function 1 (OVV detection)	ADACMP1L_N		ADACP1L_N
	ADC conversion completion interrupt C	INTADxPDC	-	-
	ADC conversion completion interrupt D	INTADxPDD		
	ADC conversion priority interrupt	INTADxPFLG		
	Commutation trigger (A-ENC32 position detect synchronous)	INTENC00	T32A ch0	T32A00TRGOUTCMPA0
	Commutation trigger (General purpose timer synchronous)	PMD0TMR		
	Commutation trigger (A-ENC MCMP completion synchronous)	ENC0CTRGO	-	-
	VE U-phase PWM duty	VExCMPU		
	VE V-phase PWM duty	VExCMPV		
	VE W-phase PWM duty	VExCMPW		
	VE Trigger comparison 0	VExTRGCMP0		
	VE Trigger comparison 1	VExTRGCMP1		
	VE Trigger output selection	VExTRGSEL		
	VE Conduction control / Output control	VExOUTCR		
	VE EMG release	VExEMGRS		
	VE Task transition signal	VExTASKP		
VE interrupt	INTVCNx			

Table 2.60 A-PMD Inside Connection List: Output

Channel	Function output	Signal name	Output destination	Signal name
ch0	ADC synchronous trigger output 0	PMD0TRG0	ADC unit A	PMD0TRG0
	ADC synchronous trigger output 1	PMD0TRG1	ADC unit A	PMD0TRG1
	ADC synchronous trigger output 2	PMD0TRG2	ADC unit A	PMD0TRG2
	ADC synchronous trigger output 3	PMD0TRG3	ADC unit A	PMD0TRG3
	ADC synchronous trigger output 4	PMD0TRG4	ADC unit A	PMD0TRG4
	ADC synchronous trigger output 5	PMD0TRG5	ADC unit A	PMD0TRG5
	PWM signal for the encoder input	PMD0PWMON	-	-
	PWM interrupt	INTPWM0		

2.11. Clock Selective Watchdog Timer (SIWDT)

2.11.1. Built-in Channel

The following table shows the SIWDT built-in channel of each product.

Table 2.61 SIWDT Built-in Channel

Product	SIWDT channel (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.11.2. Count Clock

The Clock Selective Watchdog Timer can select the clock to count.

The following table shows the selectable clock.

Table 2.62 SIWDT Count Clock

Clock	Signal	Selection
System clock	fsys	Selected by [SIWD0MOD]<WDCLS>
Internal high-speed oscillator1 clock	fIHOSC1	
Internal high-speed oscillator2 clock	fIHOSC2	

2.11.3. Output Control

To select the internal high-speed oscillator 2 (fIHOSC2), rewriting of the internal high-speed oscillator2 can be forbidden.

Table 2.63 SIWDT Output Control

Output control	Signal name	Remark
Protect signal of internal high-speed oscillator 2 control bit ([CGOSCCR]<IHOSC2EN>)	OSCPRO	Setting by [SIWD0OSCCR]<OSCPRO>

2.12. CRC Calculation Circuit (CRC)

The following table shows the CRC built-in channel of each product.

Table 2.64 CRC Built-in Channel

Product	CRC built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.13. RAM Parity (RAMP)

2.13.1. Built-in Channel

The following table shows the RAMP built-in channel of each product.

Table 2.65 RAMP Built-in Channel

Product	RAMP built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.13.2. Error Detection Block Area

The following table shows the detection RAM block area of each product.

Table 2.66 RAM Area and Address of RAMP

Register name	RAM area address	Products (✓: Available, - : N/A)		
		M4H4	M4H2	M4H1
<i>[RPARST]</i> <RPARFG2>	0x20002000-0x200047FF	✓	✓	✓
<i>[RPARST]</i> <RPARFG1>	0x20001000-0x20001FFF	✓	✓	✓
<i>[RPARST]</i> <RPARFG0>	0x20000000-0x20000FFF	✓	✓	✓

2.14. Oscillation Frequency Detection Circuit (OFD)

2.14.1. Built-in Channel

The following table shows the OFD built-in channel of each product.

Table 2.67 OFD Built-in Channel

Product	OFD built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.14.2. Reference Clock

The Oscillation frequency detection circuit operates considering the clock of the following tables as a reference clock.

Table 2.68 OFD Reference Clock

Reference clock	Signal name	Divide value
Internal high-speed oscillator 2	f _{IHOSC2}	256

2.14.3. Clock for Detection

The Oscillation frequency detection circuit chooses the clock to monitor from the detection object clock of the following tables.

Table 2.69 OFD Clock for Detection

Clock for detection		Signal name
Input signal	External high-speed oscillator clock	f _{EHOSC}
	Selected clock by the [CGOSCCR] <OSCSEL> and [CGPLLOSEL] <PLL0SEL> in CG (Clock control block)	fc

2.15. Debug Interface

2.15.1. Debug Interface List for Each Product

Table 2.70 Debug Interface List

Debug function	Debug pin (Signal name)	Port	support pin list (✓: Available, -: N/A)		
			M4H4	M4H2	M4H1
Serial wire	SWDIO	PK2	✓	✓	✓
	SWCLK	PK3	✓	✓	✓
	SWV	PK1	✓	✓	✓
JTAG	TMS	PK2	✓	✓	✓
	TCK	PK3	✓	✓	✓
	TDO	PK1	✓	✓	✓
	TDI	PK0	✓	✓	✓
	TRST_N	PK4	✓	✓	✓
ETM trace	TRACECLK	PL4	✓	-	-
	TRACEDATA0	PL0	✓	-	-
	TRACEDATA1	PL1	✓	-	-
	TRACEDATA2	PL2	✓	-	-
	TRACEDATA3	PL3	✓	-	-

2.16. Non Break Debug Interface (NBDIF)

2.16.1. Built-in Channel

The following table shows the NBDIF built-in channel of each product.

Table 2.71 NBDIF Built-in Channel

Product	NBDIF built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	-
M4H1	-

2.16.2. NBDIF List for Each Product

Table 2.72 NBDIF Interface List

Debug pin (Signal name)	Port	Pin (✓: Available, - : N/A)		
		M4H4	M4H2	M4H1
NBDSYNC	PK4	✓	-	-
NBDCLK	PL4	✓	-	-
NBDDATA0	PL0	✓	-	-
NBDDATA1	PL1	✓	-	-
NBDDATA2	PL2	✓	-	-
NBDDATA3	PL3	✓	-	-

2.17. Digital Noise Filter (DNF)

2.17.1. Built-in Unit

The following table shows the DNF built-in unit of each product.

Table 2.73 DNF Built-in Unit

Product	DNF built-in (✓: Available, - : N/A)
	Unit A
M4H4	✓
M4H2	✓
M4H1	✓

2.17.2. External Interrupt List for Each Product

The digital noise filter circuit corresponds to the following external interrupt pins.

Table 2.74 External Interrupt and DNF

External interrupt pin (Signal name)	Port	Setting register name	DNF (✓: Available, - : N/A)		
			M4H4	M4H2	M4H1
INT00a	PK0	<i>[DNFAENCR]</i> <NFEN0>	✓	✓	✓
INT00b	PF1	<i>[DNFAENCR]</i> <NFEN11>	✓	-	-
INT01a	PK1	<i>[DNFAENCR]</i> <NFEN1>	✓	✓	✓
INT01b	PF2	<i>[DNFAENCR]</i> <NFEN12>	✓	-	-
INT02a	PK2	<i>[DNFAENCR]</i> <NFEN2>	✓	✓	✓
INT02b	PB0	<i>[DNFAENCR]</i> <NFEN13>	✓	✓	✓
INT03a	PK3	<i>[DNFAENCR]</i> <NFEN3>	✓	✓	✓
INT03b	PB1	<i>[DNFAENCR]</i> <NFEN14>	✓	✓	✓
INT04	PG0	<i>[DNFAENCR]</i> <NFEN4>	✓	✓	✓
INT05	PG1	<i>[DNFAENCR]</i> <NFEN5>	✓	✓	✓
INT06	PK4	<i>[DNFAENCR]</i> <NFEN6>	✓	✓	✓
INT07a	PA0	<i>[DNFAENCR]</i> <NFEN7>	✓	✓	✓
INT07b	PC2	<i>[DNFAENCR]</i> <NFEN15>	✓	-	-
INT08	PC0	<i>[DNFAENCR]</i> <NFEN8>	✓	✓	✓
INT09	PA1	<i>[DNFAENCR]</i> <NFEN9>	✓	✓	-
INT10	PC1	<i>[DNFAENCR]</i> <NFEN10>	✓	-	-

2.17.3. Sampling Source Clock

The clock which shows a digital noise filter circuit in the following tables as a source clock of a sampling is used.

Table 2.75 DNF Sampling Source Clock

Clock
fc

2.18. Trimming Circuit (TRM)

2.18.1. Built-in Channel

The following table shows the TRM built-in channel of each product.

Table 2.76 TRM Built-in Channel

Product	TRM built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.18.2. Target Oscillator

The target oscillator of the trimming circuit is the oscillator shown in the following tables.

Table 2.77 TRM Trimming Target Oscillator

Target oscillator	Oscillator
Internal high-speed oscillator 1	IHOSC1

2.19. Voltage Detection Circuit (LVD)

2.19.1. Built-in Channel

The following table shows the LVD built-in channel of each product.

Table 2.78 LVD Built-in Channel

Product	LVD built-in (✓: Available, - : N/A)
M4H4	✓
M4H2	✓
M4H1	✓

2.19.2. Detection Power Supply

A voltage detecting circuit monitors the power supply of the following tables.

Table 2.79 LVD Detection Power Supply

Detection power supply	Power supply name
Digital power source	DVDD5A/DVDD5B/DVDD5C

2.20. Flash Memory

2.20.1. Clock for Programming/Erasing

As for flash memory, the clock of the following tables is used for programming/erasing of the code flash.

Table 2.80 Clock for Programming/Erasing

Clock for programming/erasing
f _{IHOSC1}

2.20.2. Code Flash Block Configuration

The code flash has the block configuration shown in the table below.

Table 2.81 Code Flash

Block name		M4H4FYUG M4H2FYDUG M4H1FYUG	Block size (KB)
Block0	PG0	✓	4
	PG1	✓	4
	PG2	✓	4
	PG3	✓	4
	PG4	✓	4
	PG5	✓	4
	PG6	✓	4
	PG7	✓	4
Block1		✓	32
Block2		✓	32
Block3		✓	32
Block4		✓	32
Block5		✓	32
Block6		✓	32
Block7		✓	32

Note: ✓: Available, -: N/A

2.20.3. Access Control Register [FCACCR]<FCLC[2:0]> Setting

The settings of access control register [FCACCR]<FCLC[2:0]> is as follows:
 In TPM4H Group(1), use <FCLC[2:0]> with the value after reset.

Table 2.82 Access Control Register [FCACCR]<FCLC[2:0]> Setting

Bit	Bit symbol	After reset	Function
2:0	<FCLC[2:0]>	011	Code flash read clock control

2.20.4. Macro Code at ID-Read

The macro code values for this product are as follows:

Table 2.83 Macro Code at ID-Read

Code	ID[15:0]
Macro code (Code Flash)	0x0421

2.20.5. Single Boot Resource

The peripheral function of the following table is used in single boot.

Table 2.84 Single Boot Resource

Peripheral function	Channel	Function	Pin name
BOOT	-	-	PJ6 (BOOT_N)
UART	ch0	RXD	PK0 (UT0RXD)
		TXD	PK1 (UT0TXDA)
T32A	ch0	-	-

3. Revision History

Table 3.1 Revision History

Revision	Date	Description
1.0	2026-04-24	- First release

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**