

32-bit RISC Microcontroller

TXZ+ Family
TMPM4L Group(1)

Reference Manual
Product Information
(PINFO-M4L(1))

Revision 1.0

2026-01

Toshiba Electronic Devices & Storage Corporation

Contents

Preface	5
Related Documents	5
Conventions	6
Terms and Abbreviations	8
1. Outlines	9
2. Register Base Address	10
3. Trigger Selector (TRGSEL)	12
3.1. Operation and Setting	13
3.2. Register	14
3.2.1. List of Registers	14
3.2.2. Details of Registers	15
3.2.2.1. [TSELxCRn] (Control Register n) (n = 0 to 10)	15
3.3. Trigger Selector List	17
4. Direct Memory Access Controller (DMAC)	23
4.1. DMA Request List	23
5. Communication Function	27
5.1. Asynchronous Serial Communication Circuit (UART)	27
5.1.1. Half Clock Mode Support	27
5.1.2. Internal Signal Connection Specification	27
5.1.2.1. Trigger Transfer Signal Connection	27
5.1.2.2. T32A Connection	29
5.2. Serial Peripheral Interface (TSPI)	30
5.2.1. Transfer Mode	30
5.2.2. [TSPIxCR2]<RXDLY> Set Value	30
5.2.3. Internal Signal Connection Specification	30
5.2.3.1. Trigger Transfer Signal Connection	30
5.2.3.2. T32A Connection	31
5.3. Serial Memory Interface (SMIF)	32
5.3.1. Capacity of Primary and Secondary Buffer	32
6. Timer Function	33
6.1. 32-bit Timer Event Counter (T32A)	33
6.1.1. Internal Signal Connection Specification	33
6.1.1.1. Capture Trigger Signal Connection	33
6.1.1.2. Synchronous Control Connection	37
6.1.2. Pulse Counter	37
7. Motor Control Function	38
7.1. Motor Control Function Connection	38
7.2. Advanced Vector Engine 2 (A-VE2)	39
7.2.1. Internal Signal Connection Specification	39
7.3. Advanced Programmable Motor Control Circuit 2 (A-PMD2)	40

7.3.1. Internal Signal Connection Specification	40
7.4. Advanced Encoder Input Circuit 2 (A-ENC2).....	42
7.4.1. Internal Signal Connection Specification	42
7.4.1.1. T32A/A-ENC2 Connection	42
8. Analog Function	43
8.1. 12-bit Analog to Digital Converter (ADC).....	43
8.1.1. Corresponding Registers.....	43
8.1.2. Function Pin and Port.....	43
8.1.3. Setting Value of Mode Setting Register 2.....	44
8.1.4. Trimming Setting Register Setting Value.....	44
8.1.5. Internal Signal Connection Specification	44
8.2. ADC Connection Selection Circuit (ASEL)	47
8.2.1. Outlines	47
8.2.2. Configuration	48
8.2.3. Explanation of Functions and Operation.....	49
8.2.4. Register	49
8.2.4.1. [ASELADCS] (ADC Selection Register)	50
8.3. Comparator (COMP).....	51
8.3.1. Internal Signal Connection Specification	51
8.4. 8-bit Digital to Analog Converter (DAC).....	53
8.4.1. Internal Signal Connection Specification	53
9. System Function	54
9.1. Voltage Detection Circuit (LVD).....	54
9.1.1. Detection Power Supply	54
9.1.2. LVD Control Register Setting.....	54
9.2. Clock Selective Watchdog Timer (SIWDT).....	55
9.2.1. Output Control	55
9.3. Oscillation Frequency Detection Circuit (OFD).....	55
9.3.1. Reference Clock.....	55
10. Memory.....	56
10.1. Flash Memory	56
10.1.1. Access Control Register [FCACCR] Setting	56
10.1.2. Macro Code at ID-Read.....	56
10.1.3. Single Boot Resource.....	56
10.2. RAM Parity (RAMP)	56
10.2.1. Error Detection Block Area	56
11. Other Function.....	58
11.1. Digital Noise Filter (DNF).....	58
11.1.1. External Interrupt Pin and Setting Register	58
12. Revision History	59
RESTRICTIONS ON PRODUCT USE.....	60

List of Figures

Figure 3.1	Trigger Selector Connection	12
Figure 7.1	Motor Control Function Connection (Outline).....	38
Figure 8.1	Connection Between ASEL and Peripheral Functions.....	47
Figure 8.2	ASEL Block Diagram	48

List of Tables

Table 2.1	Register Base Address (1/2).....	10
Table 2.2	Register Base Address (2/2).....	11
Table 3.1	Trigger Selector List for Each Product (1/6)	17
Table 3.2	Trigger Selector List for Each Product (2/6)	18
Table 3.3	Trigger Selector List for Each Product (3/6)	19
Table 3.4	Trigger Selector List for Each Product (4/6)	20
Table 3.5	Trigger Selector List for Each Product (5/6)	21
Table 3.6	Trigger Selector List for Each Product (6/6)	22
Table 4.1	DMA Request List (1/4).....	23
Table 4.2	DMA Request List (2/4).....	24
Table 4.3	DMA Request List (3/4).....	25
Table 4.4	DMA Request List (4/4).....	26
Table 5.1	UART Trigger Transfer Signal Connection (1/2)	27
Table 5.2	UART Trigger Transfer Signal Connection (2/2)	28
Table 5.3	UART Inside Connection List: Output.....	29
Table 5.4	[TSPIxCR2]<RXDLY[2:0]> Set Value	30
Table 5.5	TSPI Trigger Transfer Signal Connection Specification	30
Table 5.6	TSPI Inside Connection: Output	31
Table 5.7	SMIF Capacity of Buffer.....	32
Table 6.1	T32A Capture Trigger Connection (1/3)	34
Table 6.2	T32A Capture Trigger Connection (2/3)	35
Table 6.3	T32A Capture Trigger Connection (3/3)	36
Table 6.4	T32A Synchronous Control Connection Specifications	37
Table 7.1	A-VE2 Internal Connection Specification: Input.....	39
Table 7.2	A-VE2 Internal Connection Specification: Output.....	39
Table 7.3	A-PMD2 Inside Connection Specification: Input.....	40
Table 7.4	A-PMD2 Inside Connection Specification: Output.....	41
Table 7.5	A-ENC2 Internal Connection Specification: Input.....	42
Table 7.6	A-ENC2 Internal Connection Specification: Output.....	42
Table 8.1	ADC Corresponding Registers for Each Unit	43
Table 8.2	ADC Function Pin and Port.....	43
Table 8.3	Setting Value of ADC Mode Setting Register 2	44
Table 8.4	Setting Value of Trimming Setting Register.....	44
Table 8.5	ADC Startup Trigger Connection Specifications.....	45
Table 8.6	ADC Inside Connection: Output.....	46
Table 8.7	List of Signal.....	48
Table 8.8	COMP Internal Connection Specification: Input	51
Table 8.9	COMP Internal Connection Specification: Output	52
Table 8.10	DAC Internal Connection Specification: Output.....	53
Table 9.1	LVD Detection Power Supply.....	54
Table 9.2	LVD Control Register [LVDCR]<LVL[2:0]> Setting.....	54
Table 9.3	SIWDT Output Control	55
Table 9.4	OFD Reference Clock.....	55
Table 10.1	Access Control Register [FCACCR] Setting.....	56
Table 10.2	Macro Code at ID-Read	56
Table 10.3	Single Boot Resource	56
Table 10.4	RAM Area and Address of RAMP.....	56
Table 11.1	External Interrupt Pins and DNF Setting Registers	58
Table 12.1	Revision History	59

Preface

Related Documents

Document name	IP symbol
Clock Control and Operation Mode	CG-M4L(1)
Exception	EXCEPT-M4L(1)
Input/Output Ports	PORT-M4L(1)
Trimming Circuit	TRM-C
Oscillation Frequency Detector	OFD-A
Voltage Detection Circuit	LVD-D2
Digital Noise Filter Circuit	DNF-A
Debug Interface	DEBUG-A
DMA Controller	DMAC-B
Asynchronous Serial Communication Circuit	UART-C
Serial Peripheral Interface	TSPI-E
Serial Memory Interface	SMIF-D
I ² C Interface Version A	EI2C-A2
8-bit Digital to Analog Converter	DAC-B
12-bit Analog to Digital Converter	ADC-F
Comparator	COMP-D
Advanced Programmable Motor Control Circuit 2	A-PMD2-A
Advanced Encoder Input Circuit 2	A-ENC2-A
Advanced vector engine 2	A-VE2-A
32-bit Timer Event Counter	T32A-C
Clock Selective Watchdog Timer	SIWDT-A
Flash Memory	FLASH256F-A
Secure Access Memory	SAM-A
CRC Calculation Circuit	CRC-A
RAM Parity	RAMP-B

Conventions

- Numeric formats follow the rules as shown below:

Hexadecimal:	0xABC	
Decimal:	123 or 0d123	- Only when it needs to be explicitly shown that they are decimal numbers.
Binary:	0b111	- It is possible to omit the "0b" when the number of bits can be distinctly understood from a sentence.
- "_N" is added to the end of signal names to indicate low active signals.
- It is called "assert" that a signal moves to its active level, "deassert" to its inactive level.
- When two or more signal names are referred, they are described like as [m:n].
 Example: S[3:0] shows four signal names S3, S2, S1 and S0 together.
- The characters surrounded by [] defines the register.
 Example: [ABCD]
- "N" substitutes suffix number of two or more same kind of registers, fields, and bit names.
 Example: [XYZ1], [XYZ2], [XYZ3] → [XYZn]
- "x" substitutes suffix number or character of units and channels in the register list.
- In case of unit, "x" means A, B, and C, ...
 Example: [ADACR0], [ADBCR0], [ADCCR0] → [ADxCR0]
- In case of channel, "x" means 0, 1, and 2, ...
 Example: [T32A0RUNA], [T32A1RUNA], [T32A2RUNA] → [T32AxRUNA]
- The bit range of a register is written like as [m: n].
 Example: Bit[3: 0] expresses the range of bit 3 to 0.
- The configuration value of a register is expressed by either the hexadecimal number or the binary number.
 Example: [ABCD]<EFG> = 0x01 (hexadecimal), [XYZn]<VW> = 1 (binary)
- Word and byte represent the following bit length.

Byte:	8 bits
Half word:	16 bits
Word:	32 bits
Double word:	64 bits
- Properties of each bit in a register are expressed as follows:

R:	Read only
W:	Write only
R/W:	Read and write are possible.
- Unless otherwise specified, register access supports only word access.
- The register defined as "Reserved" must not be rewritten. Moreover, do not use the read value.
- The value read from the bit having default value of "-" is unknown.
- When a register containing both of writable bits and read-only bits is written, read-only bits should be written with their default value. In the cases that default is "-", follow the definition of each register.
- Reserved bits of the write-only register should be written with their default value. In the cases that default is "-", follow the definition of each register.
- Do not use read-modified-write processing to the register of a definition which is different by writing and read out.

Arm, Cortex and Thumb are registered trademarks of Arm Limited (or its subsidiaries) in the US
and/or elsewhere. All rights reserved.



All other company names, product names, and service names mentioned herein may be trademarks of their
respective companies.

Terms and Abbreviations

Some of abbreviations used in this document are as follows:

ADC	Analog to Digital Converter
A-ENC2	Advanced Encoder input Circuit 2
A-PMD2	Advanced Programmable Motor Control Circuit 2
A-VE2	Advanced Vector Engine 2
COMP	Comparator
CRC	Cyclic Redundancy Check
DAC	Digital to Analog Converter
DMAC	Direct Memory Access Controller
DNF	Digital Noise Filter
EHOSC	External High-speed Oscillator
EI2C	I ² C Interface Version A
IHOSC	Internal High-speed Oscillator
INT	Interrupt
LVD	Voltage Detection Circuit
OFD	Oscillation Frequency Detector
RAMP	RAM Parity
SIWDT	Clock Selective Watchdog Timer
SMIF	Serial Memory Interface
TRGSEL	Trigger Selection Circuit
TRM	Trimming Circuit
TSPI	Serial Peripheral Interface
T32A	32-bit Timer Event Counter
UART	Asynchronous Serial Communication Circuit

1. Outlines

Refer to this reference manual when using peripheral functions.

- Base addresses of peripheral functions
- Signal connections between peripheral functions
- Product-specific specifications for peripheral functions
- Product-specific restrictions for peripheral functions
- Registers with specific values for each product
- Registers that require specific values to be set for each product

Observe the product-specific restrictions.

If there are no signal connections between peripheral functions, do not use the corresponding function.

Be sure to set any registers that require setting of specific values.

2. Register Base Address

The following table shows the base addresses of each peripheral.

Table 2.1 Register Base Address (1/2)

Peripheral function			Base address
Clock Control and Operation Mode	CG	-	0x40083000
Interrupt Control A	IA	-	0x4003E000
Low-speed Oscillation/Power Control/Reset	RLM	-	0x4003E400
Interrupt Control B	IB	-	0x40083200
Interrupt Monitor	IMN	-	0x40083300
Port A	PORT A	-	0x40080000
Port B	PORT B	-	0x40080100
Port C	PORT C	-	0x40080200
Port D	PORT D	-	0x40080300
Port E	PORT E	-	0x40080400
Port F	PORT F	-	0x40080500
Port G	PORT G	-	0x40080600
Port H	PORT H	-	0x40080700
Port J	PORT J	-	0x40080800
Drive Capacity Control	DRV	-	0x40090000
Trigger Selector	TRGSEL	-	0x40040400
ADC Connection Selection Circuit	ASEL	-	0x40078000
Trimming Circuit	TRM	-	0x40083100
Oscillation Frequency Detector	OFD	-	0x40084000
Voltage Detection Circuit	LVD	-	0x4003EC00
Digital Noise Filter Circuit	DNF	unit A	0x40040200
		unit B	0x40040300
Direct Memory Access Controller	DMAC	unit A	0x40044000
Asynchronous Serial Communication Circuit	UART	ch0	0x4006E000
		ch1	0x4006E400
		ch2	0x4006E800
		ch3	0x4006EC00
		ch4	0x4006F000
		ch5	0x4006F400

Table 2.2 Register Base Address (2/2)

Peripheral function			Base address
Serial Peripheral Interface	TSPI	ch0	0x4006A000
		ch1	0x4006A400
		ch2	0x4006A800
Serial Memory Interface	SMIF	ch0	0x4003C000
I ² C Interface Version A	EI2C	ch0	0x40071000
		ch1	0x40072000
8-bit Digital to Analog Converter	DAC	ch0	0x4005C800
		ch1	0x4005C900
12-bit Analog to Digital Converter	ADC	unit A	0x4005A000
		unit B	0x4005A400
Comparator	COMP	ch0	0x4005D100
		ch1	0x4005D104
		ch2	0x4005D108
		ch3	0x4005D10C
		ch4	0x4005D110
		ch5	0x4005D114
Advanced Programmable Motor Control Circuit 2	A-PMD2	ch0	0x40068C00
Advanced Encoder Input Circuit 2	A-ENC2	ch0	0x40068800
Advanced vector engine 2	A-VE2	ch0	0x4008B000
32-bit Timer Event Counter	T32A	ch0	0x40061000
		ch1	0x40061400
		ch2	0x40061800
		ch3	0x40061C00
		ch4	0x40062000
Clock Selective Watchdog Timer	SIWDT	ch0	0x40040600
Flash Memory	Flash	-	0x5DFF0000
Secure Access Memory	SAM	-	0x40043400
CRC Calculation Circuit	CRC	-	0x40043100
RAM Parity	RAMP	ch0	0x40043000

3. Trigger Selector (TRGSEL)

The trigger selector is the circuit which chooses the one trigger and outputs the trigger signal to the peripheral function from maximum eight triggers inputted from the peripheral function, the port, etc.

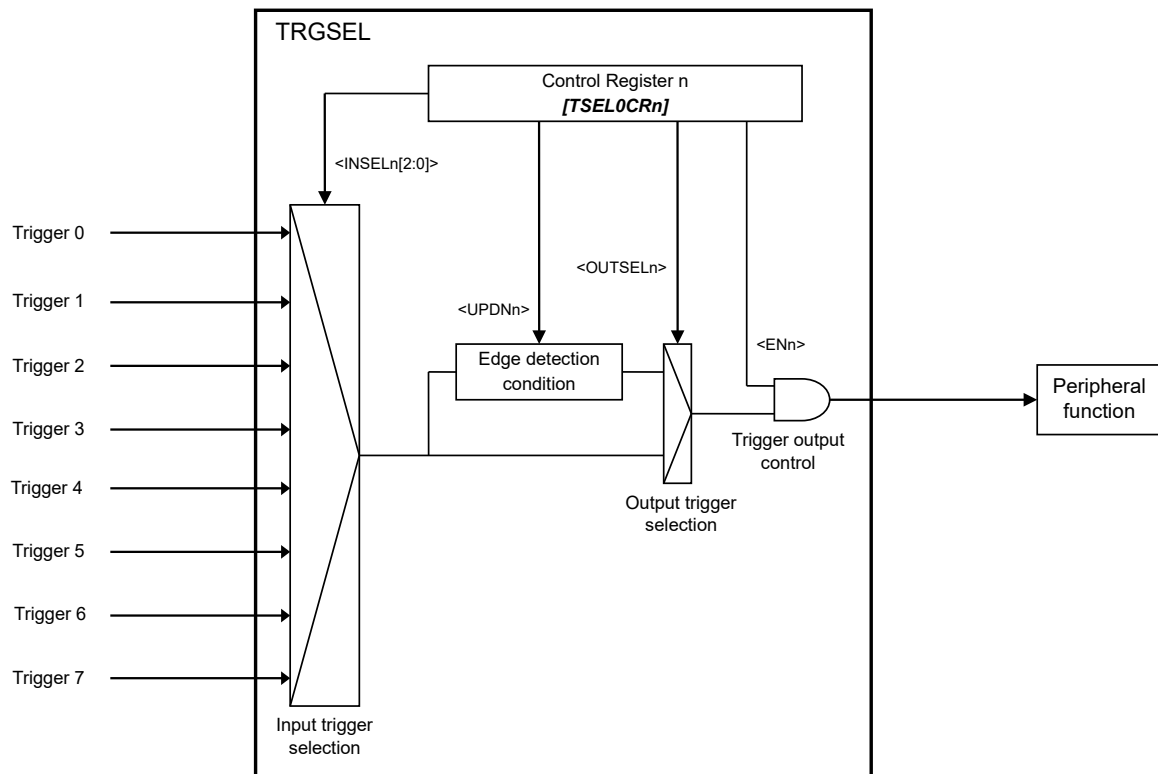


Figure 3.1 Trigger Selector Connection

3.1. Operation and Setting

When using TRGSEL, please set an applicable clock enable bit to "1" (clock supply) in fsys supply stop register A (*JCGFSYSENA*), fsys supply stop register B (*JCGFSYSENB*), and fc supply stop registers (*JCGFCEN*).

An applicable register and the bit position vary according to a product. Therefore, the register may not exist with the product. Please refer to "Clock Control and Operation Mode" of the reference manual for the details.

Setting procedure of Trigger selector is as following.

(1) Selection of an input trigger (*JTSEL0CRn* <INSELm>)

Selection of the input trigger used for the trigger source is performed.

Please set up selection of the input trigger by the input trigger subdevice bit (*JTSEL0CRn* <INSELm>) of the control register. (n: register number, m: trigger number)

(2) Selection of edge detection conditions (*JTSEL0CRn* <UPDNm>)

For the input trigger signal which needs edge detection, selection of rising edge or falling edge detection is performed.

Please set up selection of edge detection conditions in the selection bit (*JTSEL0CRn* <UPDNm>) of a control register.

The following shows the trigger signal which needs edge detection.

- External trigger input (TRGIN0, TRGIN1, and TRGIN2)

(3) Selection of a trigger output (*JTSEL0CRn* <OUTSELm>)

Selection of an output without or with edge detection is performed.

Please set up selection of a trigger output in the selection bit (*JTSEL0CRn* <OUTSELm>) of a control register.

(4) Output enable (*JTSEL0CRn* <ENm>)

The output (enable/disable) of the selected trigger signal is chosen.

Please set up selection of output (enable/disable) in the setting bit (*JTSEL0CRn* <ENm>) of a control register. A trigger output will be enabled if *JTSEL0CRn* <ENm> is set as "1".

3.2. Register

3.2.1. List of Registers

The table below shows control registers and their addresses.

Peripheral function		Channel/unit	Base address
Trigger Selector	TRGSEL	ch0	0x40040400

Register name		Address (Base+)
Control Register 0	<i>[TSELxCR0]</i>	0x0000
Control Register 1	<i>[TSELxCR1]</i>	0x0004
Control Register 2	<i>[TSELxCR2]</i>	0x0008
Control Register 3	<i>[TSELxCR3]</i>	0x000C
Control Register 4	<i>[TSELxCR4]</i>	0x0010
Control Register 5	<i>[TSELxCR5]</i>	0x0014
Control Register 6	<i>[TSELxCR6]</i>	0x0018
Control Register 7	<i>[TSELxCR7]</i>	0x001C
Control Register 8	<i>[TSELxCR8]</i>	0x0020
Control Register 9	<i>[TSELxCR9]</i>	0x0024
Control Register 10	<i>[TSELxCR10]</i>	0x0028

3.2.2. Details of Registers

The details of the register are as follows:

One register (*[TSELxCRn]*) can control four trigger selectors (INSEL0 to 3). For input trigger assignments, refer to "3.3. Trigger Selector List". Settings without input trigger assignments cannot be used.

3.2.2.1. *[TSELxCRn]* (Control Register n) (n = 0 to 10)

Bit	Bit symbol	After reset	Type	Function
31	-	0	R	Read as 0
30:28	INSEL3[2:0]	000	R/W	Select the input trigger 000: Trigger 30 001: Trigger 31 010: Trigger 32 011: Trigger 33 100: Trigger 34 101: Trigger 35 110: Trigger 36 111: Trigger 37
27	-	0	R	Read as 0
26	UPDN3	0	R/W	Edge detection 0: Rising edge detection 1: falling edge detection
25	OUTSEL3	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
24	EN3	0	R/W	Trigger output control 0: Disable 1: Enable
23	-	0	R	Read as 0
22:20	INSEL2[2:0]	000	R/W	Select the input trigger 000: Trigger 20 001: Trigger 21 010: Trigger 22 011: Trigger 23 100: Trigger 24 101: Trigger 25 110: Trigger 26 111: Trigger 27
19	-	0	R	Read as 0
18	UPDN2	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
17	OUTSEL2	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
16	EN2	0	R/W	Trigger output control 0: Disable 1: Enable
15	-	0	R	Read as 0

Bit	Bit symbol	After reset	Type	Function
14:12	INSEL1[2:0]	000	R/W	Select the input trigger 000: Trigger 10 001: Trigger 11 010: Trigger 12 011: Trigger 13 100: Trigger 14 101: Trigger 15 110: Trigger 16 111: Trigger 17
11	-	0	R	Read as 0
10	UPDN1	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
9	OUTSEL1	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
8	EN1	0	R/W	Trigger output control 0: Disable 1: Enable
7	-	0	R	Read as 0
6:4	INSEL0[2:0]	000	R/W	Select the input trigger 000: Trigger 00 001: Trigger 01 010: Trigger 02 011: Trigger 03 100: Trigger 04 101: Trigger 05 110: Trigger 06 111: Trigger 07
3	-	0	R	Read as 0
2	UPDN0	0	R/W	Edge detection 0: Rising edge detection 1: Falling edge detection
1	OUTSEL0	0	R/W	Select the output trigger 0: The edge detection is disable 1: The edge detection is enable
0	EN0	0	R/W	Trigger output control 0: Disable 1: Enable

3.3. Trigger Selector List

The table below shows the control registers, their connections points, and the corresponding products.

Table 3.1 Trigger Selector List for Each Product (1/6)

Register	Bit symbol	Destination	Trigger source		Product (✓:Available, -:N/A)		
					M4L4	M4L2	M4L1
[TSEL0CR0]	INSEL0	DMA ch0	Trigger 00	TSPI ch0 receive DMA request	✓	-	-
			Trigger 01	EI2C ch0 receive DMA request	✓	✓	✓
			Trigger 02	EI2C ch1 receive DMA request	✓	-	-
	INSEL1	DMA ch1	Trigger 10	TSPI ch0 transmit DMA request	✓	-	-
			Trigger 11	EI2C ch0 transmit DMA request	✓	✓	✓
			Trigger 12	EI2C ch1 transmit DMA request	✓	-	-
	INSEL2	DMA ch8	Trigger 20	UART ch1 reception DMA request	✓	✓	✓
			Trigger 21	EI2C ch0 receive DMA request	✓	✓	✓
			Trigger 22	EI2C ch1 receive DMA request	✓	-	-
	INSEL3	DMA ch9	Trigger 30	UART ch1 transmission DMA request	✓	✓	✓
			Trigger 31	EI2C ch0 transmit DMA request	✓	✓	✓
			Trigger 32	EI2C ch1 transmit DMA request	✓	-	-
[TSEL0CR1]	INSEL0	DMA ch18	Trigger 00	ADC unit A general purpose trigger DMA request	✓	✓	✓
			Trigger 01	ADC unit A single conversion DMA request			
			Trigger 02	ADC unit A continuous conversion DMA request			
	INSEL1	DMA ch19	Trigger 10	ADC unit B general purpose trigger DMA request	✓	✓	✓
			Trigger 11	ADC unit B single conversion DMA request			
			Trigger 12	ADC unit B continuous conversion DMA request			
	INSEL2	DMA ch20	Trigger 20	T32A ch0 DMA request at match A1 register	✓	✓	✓
			Trigger 21	T32A ch0 DMA request at match C1 register			
			Trigger 22	T32A ch1 DMA request at match A1 register			
			Trigger 23	T32A ch1 DMA request at match C1 register			
			Trigger 24	SMIF interrupt			
	INSEL3	DMA ch21	Trigger 30	T32A ch2 DMA request at match A1 register	✓	✓	✓
			Trigger 31	T32A ch2 DMA request at match C1 register			
			Trigger 32	T32A ch3 DMA request at match A1 register			
			Trigger 33	T32A ch3 DMA request at match C1 register			
			Trigger 34	A-PMD2 ch0 PWM interrupt			

Table 3.2 Trigger Selector List for Each Product (2/6)

Register	Bit symbol	Destination	Trigger source	Product (✓:Available, -:N/A)		
				M4L4	M4L2	M4L1
[TSEL0CR2]	INSEL0	DMA ch22	Trigger 00 T32A ch4 DMA request at match A1 register	✓	✓	✓
			Trigger 01 T32A ch4 DMA request at match C1 register			
			Trigger 02 T32A ch0 DMA request at match B1 register			
			Trigger 03 T32A ch1 DMA request at match B1 register			
			Trigger 04 T32A ch2 DMA request at match B1 register			
			Trigger 05 T32A ch3 DMA request at match B1 register			
			Trigger 06 T32A ch4 DMA request at match B1 register			
	INSEL1	DMA ch23	Trigger 10 T32A ch0 DMA request at capture A0 register	✓	✓	✓
			Trigger 11 T32A ch0 DMA request at capture A1 register			
			Trigger 12 T32A ch1 DMA request at capture A0 register			
			Trigger 13 T32A ch1 DMA request at capture A1 register			
			Trigger 14 T32A ch0 DMA request at capture C0 register			
			Trigger 15 T32A ch0 DMA request at capture C1 register			
			Trigger 16 T32A ch1 DMA request at capture C0 register			
			Trigger 17 T32A ch1 DMA request at capture C1 register			
	INSEL2	DMA ch24	Trigger 20 T32A ch2 DMA request at capture A0 register	✓	✓	✓
			Trigger 21 T32A ch2 DMA request at capture A1 register			
			Trigger 22 T32A ch3 DMA request at capture A0 register			
			Trigger 23 T32A ch3 DMA request at capture A1 register			
			Trigger 24 T32A ch2 DMA request at capture C0 register			
			Trigger 25 T32A ch2 DMA request at capture C1 register			
			Trigger 26 T32A ch3 DMA request at capture C0 register			
			Trigger 27 T32A ch3 DMA request at capture C1 register			
	INSEL3	DMA ch25	Trigger 30 T32A ch4 DMA request at capture A0 register	✓	✓	✓
			Trigger 31 T32A ch4 DMA request at capture A1 register			
			Trigger 32 T32A ch4 DMA request at capture C0 register			
			Trigger 33 T32A ch4 DMA request at capture C1 register			
			Trigger 00 T32A ch0 DMA request at capture B0 register			
			Trigger 01 T32A ch0 DMA request at capture B1 register			
[TSEL0CR3]	INSEL0	DMA ch26	Trigger 02 T32A ch1 DMA request at capture B0 register	✓	✓	✓
			Trigger 03 T32A ch1 DMA request at capture B1 register			
			Trigger 04 T32A ch2 DMA request at capture B0 register			
			Trigger 05 T32A ch2 DMA request at capture B1 register			
			Trigger 10 T32A ch3 DMA request at capture B0 register			
	INSEL1	DMA ch27	Trigger 11 T32A ch3 DMA request at capture B1 register	✓	✓	✓
			Trigger 12 T32A ch4 DMA request at capture B0 register			
			Trigger 13 T32A ch4 DMA request at capture B1 register			
			Trigger 20 DMAC ch0 transfer completion	✓	-	-
	INSEL2	DMA ch28	Trigger 21 DMAC ch1 transfer completion			
			Trigger 22 DMAC ch8 transfer completion		✓	✓
			Trigger 23 DMAC ch9 transfer completion			
			Trigger 24 DMAC ch16 transfer completion	✓	✓	-
			Trigger 25 DMAC ch17 transfer completion			
			Trigger 26 DMAC ch22 transfer completion	✓	✓	✓
	INSEL3	DMA ch29	Trigger 30 DMAC ch2 transfer completion	✓	✓	✓
			Trigger 31 DMAC ch3 transfer completion			
			Trigger 32 DMAC ch10 transfer completion			
			Trigger 33 DMAC ch11 transfer completion			
			Trigger 34 DMAC ch18 transfer completion			
			Trigger 35 DMAC ch19 transfer completion			
			Trigger 36 DMAC ch23 transfer completion			
			Trigger 37 PC0 pin (TRGIN0)	✓	✓	✓

Table 3.3 Trigger Selector List for Each Product (3/6)

Register	Bit symbol	Destination	Trigger source		Product (✓:Available, -:N/A)		
					M4L4	M4L2	M4L1
[TSEL0CR4]	INSEL0	DMA ch30	Trigger 00	DMAC ch4 transfer completion	✓	✓	✓
			Trigger 01	DMAC ch5 transfer completion			
			Trigger 02	DMAC ch12 transfer completion			
			Trigger 03	DMAC ch13 transfer completion			
			Trigger 04	DMAC ch20 transfer completion			
			Trigger 05	DMAC ch24 transfer completion			
			Trigger 06	DMAC ch26 transfer completion			
			Trigger 07	PA5 pin (TRGIN1)	✓	✓	✓
	INSEL1	DMA ch31	Trigger 10	DMAC ch6 transfer completion	✓	✓	✓
			Trigger 11	DMAC ch7 transfer completion	✓	-	-
			Trigger 12	DMAC ch14 transfer completion			
			Trigger 13	DMAC ch15 transfer completion			
			Trigger 14	DMAC ch21 transfer completion	✓	✓	✓
			Trigger 15	DMAC ch25 transfer completion			
			Trigger 16	DMAC ch27 transfer completion			
			Trigger 17	PG1 pin (TRGIN2)	✓	✓	-
	INSEL2	ADC unit A	Trigger 20	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 21	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 22	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 23	T32A ch0 timer register A1 match trigger	✓	✓	✓
			Trigger 24	T32A ch0 timer register B1 match trigger			
			Trigger 25	T32A ch0 timer register C1 match trigger			
			Trigger 26	T32A ch3 timer register A0 match trigger			
			Trigger 27	T32A ch4 timer register A0 match trigger			
	INSEL3	ADC unit B	Trigger 30	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 31	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 32	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 33	T32A ch1 timer register A1 match trigger	✓	✓	✓
			Trigger 34	T32A ch1 timer register B1 match trigger			
			Trigger 35	T32A ch1 timer register C1 match trigger			
			Trigger 36	T32A ch3 timer register A1 match trigger			
			Trigger 37	T32A ch4 timer register A1 match trigger			
[TSEL0CR5]	INSEL0	TSPI ch0	Trigger 00	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 01	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 02	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 03	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 04	T32A ch3 timer register B1 match trigger			
			Trigger 05	T32A ch3 timer register C1 match trigger			
	INSEL1	TSPI ch1	Trigger 10	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 11	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 12	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 13	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 14	T32A ch3 timer register B1 match trigger			
			Trigger 15	T32A ch3 timer register C1 match trigger			
	INSEL2	TSPI ch2	Trigger 20	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 21	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 22	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 23	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 24	T32A ch3 timer register B1 match trigger			
			Trigger 25	T32A ch3 timer register C1 match trigger			
	INSEL3	UART ch0	Trigger 30	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 31	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 32	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 33	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 34	T32A ch3 timer register B1 match trigger			
			Trigger 35	T32A ch3 timer register C1 match trigger			

Table 3.4 Trigger Selector List for Each Product (4/6)

Register	Bit symbol	Destination	Trigger source		Product (✓:Available, -:N/A)		
					M4L4	M4L2	M4L1
[TSEL0CR6]	INSEL0	UART ch1	Trigger 00	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 01	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 02	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 03	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 04	T32A ch3 timer register B1 match trigger			
			Trigger 05	T32A ch3 timer register C1 match trigger			
	INSEL1	UART ch2	Trigger 10	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 11	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 12	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 13	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 14	T32A ch3 timer register B1 match trigger			
			Trigger 15	T32A ch3 timer register C1 match trigger			
	INSEL2	UART ch3	Trigger 20	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 21	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 22	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 23	T32A ch3 timer register A1 match trigger	✓	✓	✓
			Trigger 24	T32A ch3 timer register B1 match trigger			
			Trigger 25	T32A ch3 timer register C1 match trigger			
	INSEL3	UART ch4	Trigger 30	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 31	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 32	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 33	T32A ch3 timer register A1 match trigger	✓	-	-
			Trigger 34	T32A ch3 timer register B1 match trigger			
			Trigger 35	T32A ch3 timer register C1 match trigger			
[TSEL0CR7]	INSEL0	UART ch5	Trigger 00	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 01	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 02	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 03	T32A ch3 timer register A1 match trigger	✓	✓	-
			Trigger 04	T32A ch3 timer register B1 match trigger			
			Trigger 05	T32A ch3 timer register C1 match trigger			
	INSEL1	TRGSEL [TSEL0CR8] <INSEL2> input [TSEL0CR9] <INSEL2> input [TSEL0CR10] <INSEL0> input <INSEL2> input	Trigger 10	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 11	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 12	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 13	UART ch4 transmission completion trigger	✓	-	-
			Trigger 14	UART ch4 reception completion trigger			
			Trigger 15	TSPI ch1 transmit completion trigger	✓	✓	✓
			Trigger 16	TSPI ch1 receive completion trigger			
	Trigger 17	EI2C ch0 status interrupt					
	INSEL2	TRGSEL [TSEL0CR8] <INSEL2> input [TSEL0CR9] <INSEL0> input [TSEL0CR10] <INSEL0> input <INSEL2> input	Trigger 20	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 21	PA5 pin (TRGIN1)	✓	✓	✓
			Trigger 22	PG1 pin (TRGIN2)	✓	✓	-
			Trigger 23	UART ch1 transmission completion trigger	✓	✓	✓
			Trigger 24	UART ch1 reception completion trigger			
			Trigger 25	TSPI ch0 transmit completion trigger	✓	-	-
			Trigger 26	TSPI ch0 receive completion trigger			
	Trigger 27	EI2C ch1 status interrupt					
	INSEL3	TRGSEL [TSEL0CR8] <INSEL2> input [TSEL0CR9] <INSEL0> input <INSEL2> input [TSEL0CR10] <INSEL2> input	Trigger 30	PC0 pin (TRGIN0)	✓	✓	✓
			Trigger 31	PA5 pin (TRGIN1)	✓	✓	✓
Trigger 32			PG1 pin (TRGIN2)	✓	✓	-	
Trigger 33			UART ch2 transmission completion trigger	✓	✓	✓	
Trigger 34			UART ch2 reception completion trigger				
Trigger 35			TSPI ch2 transmit completion trigger				
Trigger 36			TSPI ch2 receive completion trigger				
Trigger 37			A-ENC2 ch0 divided pulse				

Table 3.5 Trigger Selector List for Each Product (5/6)

Register	Bit symbol	Destination	Trigger source		Product (✓:Available, -:N/A)		
					M4L4	M4L2	M4L1
[TSEL0CR8]	INSEL0	TRGSEL	Trigger 00	PC0 pin (TRGIN0)	✓	✓	✓
		[TSEL0CR8]	Trigger 01	UART ch3 transmission completion trigger			
		<INSEL2> input	Trigger 02	UART ch3 reception completion trigger			
		[TSEL0CR9]	Trigger 03	ADC unit A general purpose trigger interrupt			
		<INSEL0> input	Trigger 04	ADC unit A single conversion interrupt	✓	✓	✓
		<INSEL2> input	Trigger 05	ADC unit A continuous conversion interrupt			
		[TSEL0CR10]	Trigger 06	ADC unit A monitor function 0 Interrupt			
		<INSEL0> input	Trigger 07	ADC unit A monitor function 1 Interrupt			
	INSEL1	TRGSEL	Trigger 10	UART ch0 transmission completion trigger	✓	✓	✓
		[TSEL0CR9]	Trigger 11	UART ch0 reception completion trigger			
		<INSEL0> input	Trigger 12	UART ch5 transmission completion trigger	✓	✓	-
		<INSEL2> input	Trigger 13	UART ch5 reception completion trigger			
		[TSEL0CR10]	Trigger 14	ADC unit B general purpose trigger interrupt			
		<INSEL0> input	Trigger 15	ADC unit B single conversion interrupt	✓	✓	✓
		<INSEL2> input	Trigger 16	ADC unit B continuous conversion interrupt			
			Trigger 17	ADC unit B monitor function 0 Interrupt			
	INSEL2		Trigger 20	T32A ch0 timer register B0 match trigger			
			Trigger 21	T32A ch0 timer register B1 match trigger			
			Trigger 22	T32A ch0 timer B overflow trigger			
			Trigger 23	T32A ch0 timer B underflow trigger	✓	✓	✓
			Trigger 24	[TSEL0CR7]<INSEL1> output			
			Trigger 25	[TSEL0CR7]<INSEL2> output			
			Trigger 26	[TSEL0CR7]<INSEL3> output			
			Trigger 27	[TSEL0CR8]<INSEL0> output			
	INSEL3		Trigger 30	T32A ch0 timer register A0 match trigger			
			Trigger 31	T32A ch0 timer register A1 match trigger	✓	✓	✓
			Trigger 32	T32A ch0 timer A overflow trigger			
			Trigger 33	T32A ch0 timer A underflow trigger			
[TSEL0CR9]	INSEL0		Trigger 00	T32A ch1 timer register B0 match trigger			
			Trigger 01	T32A ch1 timer register B1 match trigger			
			Trigger 02	T32A ch1 timer B overflow trigger			
			Trigger 03	T32A ch1 timer B underflow trigger	✓	✓	✓
			Trigger 04	[TSEL0CR7]<INSEL2> output			
			Trigger 05	[TSEL0CR7]<INSEL3> output			
			Trigger 06	[TSEL0CR8] INSEL0> output			
			Trigger 07	[TSEL0CR8]<INSEL1> output			
	INSEL1		Trigger 10	T32A ch1 timer register A0 match trigger			
			Trigger 11	T32A ch1 timer register A1 match trigger	✓	✓	✓
			Trigger 12	T32A ch1 timer A overflow trigger			
			Trigger 13	T32A ch1 timer A underflow trigger			
	INSEL2		Trigger 20	T32A ch2 timer register B0 match trigger			
			Trigger 21	T32A ch2 timer register B1 match trigger			
			Trigger 22	T32A ch2 timer B overflow trigger			
			Trigger 23	T32A ch2 timer B underflow trigger	✓	✓	✓
			Trigger 24	[TSEL0CR7]<INSEL3> output			
			Trigger 25	[TSEL0CR8]<INSEL0> output			
			Trigger 26	[TSEL0CR8]<INSEL1> output			
	INSEL3		Trigger 27	[TSEL0CR7]<INSEL1> output			
			Trigger 30	T32A ch2 timer register A0 match trigger			
			Trigger 31	T32A ch2 timer register A1 match trigger	✓	✓	✓
			Trigger 32	T32A ch2 timer A overflow trigger			
			Trigger 33	T32A ch2 timer A underflow trigger			

Table 3.6 Trigger Selector List for Each Product (6/6)

Register	Bit symbol	Destination	Trigger source		Product (✓:Available, -:N/A)		
					M4L4	M4L2	M4L1
[TSEL0CR10]	INSEL0	T32A ch3 timer A	Trigger 00	T32A ch3 timer register B0 match trigger	✓	✓	✓
			Trigger 01	T32A ch3 timer register B1 match trigger			
			Trigger 02	T32A ch3 timer B overflow trigger			
			Trigger 03	T32A ch3 timer B underflow trigger			
			Trigger 04	[TSEL0CR8]<INSEL0> output			
			Trigger 05	[TSEL0CR8]<INSEL1> output			
			Trigger 06	[TSEL0CR7]<INSEL1> output			
			Trigger 07	[TSEL0CR7]<INSEL2> output			
	INSEL1	T32A ch3 timer B	Trigger 10	T32A ch3 timer register A0 match trigger	✓	✓	✓
			Trigger 11	T32A ch3 timer register A1 match trigger			
			Trigger 12	T32A ch3 timer A overflow trigger			
			Trigger 13	T32A ch3 timer A underflow trigger			
	INSEL2	T32A ch4 timer A	Trigger 20	T32A ch4 timer register B0 match trigger	✓	✓	✓
			Trigger 21	T32A ch4 timer register B1 match trigger			
			Trigger 22	T32A ch4 timer B overflow trigger			
			Trigger 23	T32A ch4 timer B underflow trigger			
			Trigger 24	[TSEL0CR8]<INSEL1> output			
			Trigger 25	[TSEL0CR7]<INSEL1> output			
			Trigger 26	[TSEL0CR7]<INSEL2> output			
			Trigger 27	[TSEL0CR7]<INSEL3> output			
	INSEL3	T32A ch4 timer B	Trigger 30	T32A ch4 timer register A0 match trigger	✓	✓	✓
			Trigger 31	T32A ch4 timer register A1 match trigger			
			Trigger 32	T32A ch4 timer A overflow trigger			
			Trigger 33	T32A ch4 timer A underflow trigger			

4. Direct Memory Access Controller (DMAC)

4.1. DMA Request List

Following table shows the DMA request List.

The channel which has a register name in the trigger selector column of a table should choose the request used by a trigger selector.

Each EI2C DMA requests are connected to two channels, but one of the channels should be selected for use.

"-" in the table does not have an applicable function.

Table 4.1 DMA Request List (1/4)

Channel	Single transfer		Trigger selector	Burst transfer	
		Signal name			Signal name
0	TSPI ch0 receive DMA request	TSPI0RX_DMA	[TSEL0CR0] <INSEL0>	TSPI ch0 receive DMA request	TSPI0RX_DMA
				EI2C ch0 receive DMA request	I2C0ARXDMAREQ
				EI2C ch1 receive DMA request	I2C1ARXDMAREQ
1	TSPI ch0 transmit DMA request	TSPI0TX_DMA	[TSEL0CR0] <INSEL1>	TSPI ch0 transmit DMA request	TSPI0TX_DMA
				EI2C ch0 transmit DMA request	I2C0ATXDMAREQ
				EI2C ch1 transmit DMA request	I2C1ATXDMAREQ
2	TSPI ch1 receive DMA request	TSPI1RX_DMA	-	TSPI ch1 receive DMA request	TSPI1RX_DMA
3	TSPI ch1 transmit DMA request	TSPI1TX_DMA	-	TSPI ch1 transmit DMA request	TSPI1TX_DMA
4	TSPI ch2 receive DMA request	TSPI2RX_DMA	-	TSPI ch2 receive DMA request	TSPI2RX_DMA
5	TSPI ch2 transmit DMA request	TSPI2TX_DMA	-	TSPI ch2 transmit DMA request	TSPI2TX_DMA
6	UART ch0 reception DMA request	UART0RX_DMAREQ	-	UART ch0 reception DMA request	UART0RX_DMAREQ
7	UART ch0 transmission DMA request	UART0TX_DMAREQ	-	UART ch0 transmission DMA request	UART0TX_DMAREQ
8	UART ch1 reception DMA request	UART1RX_DMAREQ	[TSEL0CR0] <INSEL2>	UART ch1 reception DMA request	UART1RX_DMAREQ
				EI2C ch0 receive DMA request	I2C0ARXDMAREQ
				EI2C ch1 receive DMA request	I2C1ARXDMAREQ
9	UART ch1 transmission DMA request	UART1TX_DMAREQ	[TSEL0CR0] <INSEL3>	UART ch1 transmission DMA request	UART1TX_DMAREQ
				EI2C ch0 transmit DMA request	I2C0ATXDMAREQ
				EI2C ch1 transmit DMA request	I2C1ATXDMAREQ
10	UART ch2 reception DMA request	UART2RX_DMAREQ	-	UART ch2 reception DMA request	UART2RX_DMAREQ
11	UART ch2 transmission DMA request	UART2TX_DMAREQ	-	UART ch2 transmission DMA request	UART2TX_DMAREQ
12	UART ch3 reception DMA request	UART3RX_DMAREQ	-	UART ch3 reception DMA request	UART3RX_DMAREQ
13	UART ch3 transmission DMA request	UART3TX_DMAREQ	-	UART ch3 transmission DMA request	UART3TX_DMAREQ
14	UART ch4 reception DMA request	UART4RX_DMAREQ	-	UART ch4 reception DMA request	UART4RX_DMAREQ
15	UART ch4 transmission DMA request	UART4TX_DMAREQ	-	UART ch4 transmission DMA request	UART4TX_DMAREQ
16	UART ch5 reception DMA request	UART5RX_DMAREQ	-	UART ch5 reception DMA request	UART5RX_DMAREQ
17	UART ch5 transmission DMA request	UART5TX_DMAREQ	-	UART ch5 transmission DMA request	UART5TX_DMAREQ

Note: The ch0, 1, 8 and 9 are set by trigger source of DMA request. For the detail of connection, refer to the "3. Trigger Selector (TRGSEL)".

Table 4.2 DMA Request List (2/4)

Channel	Single transfer		Trigger selector	Burst transfer	
		Signal name			Signal name
18	-	-	[TSEL0CR1] <INSEL0>	ADC unit A general purpose trigger	ADATRG_DMAREQ
				ADC unit A single conversion	ADASGL_DMAREQ
				ADC unit A continuous conversion	ADACNT_DMAREQ
19	-	-	[TSEL0CR1] <INSEL1>	ADC unit B general purpose trigger	ADBTRG_DMAREQ
				ADC unit B single conversion	ADBSGL_DMAREQ
				ADC unit B continuous conversion	ADBCNT_DMAREQ
20	-	-	[TSEL0CR1] <INSEL2>	T32A ch0 DMA request at match A1 register	T32A00DMAREQCMPA1
				T32A ch0 DMA request at match C1 register	T32A00DMAREQCMPC1
				T32A ch1 DMA request at match A1 register	T32A01DMAREQCMPA1
				T32A ch1 DMA request at match C1 register	T32A01DMAREQCMPC1
				SMIF interrupt	INTSMI0
21	-	-	[TSEL0CR1] <INSEL3>	T32A ch2 DMA request at match A1 register	T32A02DMAREQCMPA1
				T32A ch2 DMA request at match C1 register	T32A02DMAREQCMPC1
				T32A ch3 DMA request at match A1 register	T32A03DMAREQCMPA1
				T32A ch3 DMA request at match C1 register	T32A03DMAREQCMPC1
				A-PMD2 ch0 PWM interrupt	INTPWM0
22	-	-	[TSEL0CR2] <INSEL0>	T32A ch4 DMA request at match A1 register	T32A04DMAREQCMPA1
				T32A ch4 DMA request at match C1 register	T32A04DMAREQCMPC1
				T32A ch0 DMA request at match B1 register	T32A00DMAREQCMPB1
				T32A ch1 DMA request at match B1 register	T32A01DMAREQCMPB1
				T32A ch2 DMA request at match B1 register	T32A02DMAREQCMPB1
				T32A ch3 DMA request at match B1 register	T32A03DMAREQCMPB1
				T32A ch4 DMA request at match B1 register	T32A04DMAREQCMPB1
23	-	-	[TSEL0CR2] <INSEL1>	T32A ch0 DMA request at capture A0 register	T32A00DMAREQCAPA0
				T32A ch0 DMA request at capture A1 register	T32A00DMAREQCAPA1
				T32A ch1 DMA request at capture A0 register	T32A01DMAREQCAPA0
				T32A ch1 DMA request at capture A1 register	T32A01DMAREQCAPA1
				T32A ch0 DMA request at capture C0 register	T32A00DMAREQCAPC0
				T32A ch0 DMA request at capture C1 register	T32A00DMAREQCAPC1
				T32A ch1 DMA request at capture C0 register	T32A01DMAREQCAPC0
				T32A ch1 DMA request at capture C1 register	T32A01DMAREQCAPC1
24	-	-	[TSEL0CR2] <INSEL2>	T32A ch2 DMA request at capture A0 register	T32A02DMAREQCAPA0
				T32A ch2 DMA request at capture A1 register	T32A02DMAREQCAPA1
				T32A ch3 DMA request at capture A0 register	T32A03DMAREQCAPA0
				T32A ch3 DMA request at capture A1 register	T32A03DMAREQCAPA1
				T32A ch2 DMA request at capture C0 register	T32A02DMAREQCAPC0
				T32A ch2 DMA request at capture C1 register	T32A02DMAREQCAPC1
				T32A ch3 DMA request at capture C0 register	T32A03DMAREQCAPC0
				T32A ch3 DMA request at capture C1 register	T32A03DMAREQCAPC1

Note: The ch18 to 24 are set by trigger source of DMA request. For the detail of connection, refer to the "3. Trigger Selector (TRGSEL)"

Table 4.3 DMA Request List (3/4)

Channel	Single transfer		Trigger selector	Burst transfer	
		Signal name			Signal name
25	-	-	[TSEL0CR2] <INSEL3>	T32A ch4 DMA request at capture A0 register	T32A04DMAREQCAPA0
				T32A ch4 DMA request at capture A1 register	T32A04DMAREQCAPA1
				T32A ch4 DMA request at capture C0 register	T32A04DMAREQCAPC0
				T32A ch4 DMA request at capture C1 register	T32A04DMAREQCAPC1
26	-	-	[TSEL0CR3] <INSEL0>	T32A ch0 DMA request at capture B0 register	T32A00DMAREQCAPB0
				T32A ch0 DMA request at capture B1 register	T32A00DMAREQCAPB1
				T32A ch1 DMA request at capture B0 register	T32A01DMAREQCAPB0
				T32A ch1 DMA request at capture B1 register	T32A01DMAREQCAPB1
				T32A ch2 DMA request at capture B0 register	T32A02DMAREQCAPB0
				T32A ch2 DMA request at capture B1 register	T32A02DMAREQCAPB1
27	-	-	[TSEL0CR3] <INSEL1>	T32A ch3 DMA request at capture B0 register	T32A03DMAREQCAPB0
				T32A ch3 DMA request at capture B1 register	T32A03DMAREQCAPB1
				T32A ch4 DMA request at capture B0 register	T32A04DMAREQCAPB0
				T32A ch4 DMA request at capture B1 register	T32A04DMAREQCAPB1
28	-	-	[TSEL0CR3] <INSEL2>	DMAC ch0 transfer completion	INTDMAATC0
				DMAC ch1 transfer completion	INTDMAATC1
				DMAC ch8 transfer completion	INTDMAATC8
				DMAC ch9 transfer completion	INTDMAATC9
				DMAC ch16 transfer completion	INTDMAATC16
				DMAC ch17 transfer completion	INTDMAATC17
				DMAC ch22 transfer completion	INTDMAATC22
29	-	-	[TSEL0CR3] <INSEL3>	DMAC ch2 transfer completion	INTDMAATC2
				DMAC ch3 transfer completion	INTDMAATC3
				DMAC ch10 transfer completion	INTDMAATC10
				DMAC ch11 transfer completion	INTDMAATC11
				DMAC ch18 transfer completion	INTDMAATC18
				DMAC ch19 transfer completion	INTDMAATC19
				DMAC ch23 transfer completion	INTDMAATC23
				TRGIN0 (PC0 pin)	TRGIN0

Note: The ch25 to 29 are set by trigger source of DMA request. For the detail of connection, refer to the "3. Trigger Selector (TRGSEL)

Table 4.4 DMA Request List (4/4)

Channel	Single transfer		Trigger selector	Burst transfer	
		Signal name			Signal name
30	-	-	[TSEL0CR4] <INSEL0>	DMAC ch4 transfer completion	INTDMAATC4
				DMAC ch5 transfer completion	INTDMAATC5
				DMAC ch12 transfer completion	INTDMAATC12
				DMAC ch13 transfer completion	INTDMAATC13
				DMAC ch20 transfer completion	INTDMAATC20
				DMAC ch24 transfer completion	INTDMAATC24
				DMAC ch26 transfer completion	INTDMAATC26
				TRGIN1 (PA5 pin)	TRGIN1
31	-	-	[TSEL0CR4] <INSEL1>	DMAC ch6 transfer completion	INTDMAATC6
				DMAC ch7 transfer completion	INTDMAATC7
				DMAC ch14 transfer completion	INTDMAATC14
				DMAC ch15 transfer completion	INTDMAATC15
				DMAC ch21 transfer completion	INTDMAATC21
				DMAC ch25 transfer completion	INTDMAATC25
				DMAC ch27 transfer completion	INTDMAATC27
				TRGIN2 (PG1 pin)	TRGIN2

Note: The ch30 and ch31 are set by trigger source of DMA request. For the detail of connection, refer to the "3. Trigger Selector (TRGSEL)"

5. Communication Function

5.1. Asynchronous Serial Communication Circuit (UART)

5.1.1. Half Clock Mode Support

Half clock mode of the UART corresponds to 1-pin mode only.

5.1.2. Internal Signal Connection Specification

5.1.2.1. Trigger Transfer Signal Connection

Transfer function of the UART has a trigger signal control.

A trigger control signal is selected with the trigger source and use it as the following table.

Table 5.1 UART Trigger Transfer Signal Connection (1/2)

Channel		Trigger source		
	Signal name	Trigger selector	Input trigger signal	Signal name
ch0	UART0TRGIN	[TSEL0CR5] <INSEL3>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch1	UART1TRGIN	[TSEL0CR6] <INSEL0>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch2	UART2TRGIN	[TSEL0CR6] <INSEL1>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch3	UART3TRGIN	[TSEL0CR6] <INSEL2>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1

Table 5.2 UART Trigger Transfer Signal Connection (2/2)

Channel		Trigger source		
	Signal name	Trigger selector	Input trigger signal	Signal name
ch4	UART4TRGIN	[TSEL0CR6] <INSEL3>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch5	UART5TRGIN	[TSEL0CR7] <INSEL0>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1

5.1.2.2. T32A Connection

In the UART, there is a signal connected with the peripheral function inside in addition to this as shown in the following table.

Table 5.3 UART Inside Connection List: Output

Channel	Function output	Signal name	Trigger selector	Output destination	Signal name
ch0	UART ch0 transmission completion trigger output	UART0TXTRG	[TSEL0CR8] <INSEL1>	TRGSEL [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	UART ch0 reception completion trigger output	UART0RXTRG			
ch1	UART ch1 transmission completion trigger output	UART1TXTRG	[TSEL0CR7] <INSEL2>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	UART ch1 reception completion trigger output	UART1RXTRG			
ch2	UART ch2 transmission completion trigger output	UART2TXTRG	[TSEL0CR7] <INSEL3>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL2> input	-
	UART ch2 reception completion trigger output	UART2RXTRG			
ch3	UART ch3 transmission completion trigger output	UART3TXTRG	[TSEL0CR8] <INSEL0>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL0> input	-
	UART ch3 reception completion trigger output	UART3RXTRG			
ch4	UART ch4 transmission completion trigger output	UART4TXTRG	[TSEL0CR7] <INSEL1>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	UART ch4 reception completion trigger output	UART4RXTRG			
ch5	UART ch5 transmission completion trigger output	UART5TXTRG	[TSEL0CR8] <INSEL1>	TRGSEL [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	UART ch5 reception completion trigger output	UART5RXTRG			

5.2. Serial Peripheral Interface (TSPI)

5.2.1. Transfer Mode

The serial peripheral interface can use SPI mode and SIO mode.

5.2.2. [TSPIxCR2]<RXDLY> Set Value

TMPM4L Group(1) products setting value of TSPI control register 2 ([TSPIxCR2]<RXDLY[2:0]>) is as follows:

Table 5.4 [TSPIxCR2]<RXDLY[2:0]> Set Value

Bit	Bit Symbol	After Reset	Function
18:16	<RXDLY[2:0]>	001	000: fsys ≤ 40MHz 001: fsys > 40MHz

5.2.3. Internal Signal Connection Specification

5.2.3.1. Trigger Transfer Signal Connection

Transfer function of the TSPI has a trigger signal control.

A trigger control signal is selected with the trigger source and use it as the following table.

Table 5.5 TSPI Trigger Transfer Signal Connection Specification

Channel	Signal name	Trigger selector	Trigger source	
			Input trigger signal	Signal name
ch0	TSPI0TRG (input)	[TSEL0CR5] <INSEL0>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch1	TSPI1TRG (input)	[TSEL0CR5] <INSEL1>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1
ch2	TSPI2TRG (input)	[TSEL0CR5] <INSEL2>	PC0 (TRGIN0)	TRGIN0
			PA5 (TRGIN1)	TRGIN1
			PG1 (TRGIN2)	TRGIN2
			T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
			T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
			T32A ch3 timer register C1 match trigger	T32A03TRGOUTCMPC1

5.2.3.2. T32A Connection

In the TSPI, there is a signal connected with the peripheral function inside in addition to this as shown in the following table.

Table 5.6 TSPI Inside Connection: Output

Channel	Function output	Signal name	Trigger selector	Output destination	Signal name
ch0	TSPI ch0 transmit completion signal	TSPI0TXEND	[TSEL0CR7] <INSEL2>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	TSPI ch0 receive completion signal	TSPI0RXEND			
ch1	TSPI ch1 transmit completion signal	TSPI1TXEND	[TSEL0CR7] <INSEL1>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL0> input [TSEL0CR10]<INSEL2> input	-
	TSPI ch1 receive completion signal	TSPI1RXEND			
ch2	TSPI ch2 transmit completion signal	TSPI2TXEND	[TSEL0CR7] <INSEL3>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL2> input	-
	TSPI ch2 receive completion signal	TSPI2RXEND			

5.3. Serial Memory Interface (SMIF)
5.3.1. Capacity of Primary and Secondary Buffer

The table below shows the primary/secondary buffer capacities of SMIF in the TTPM4L Group(1).

Table 5.7 SMIF Capacity of Buffer

Channel	Primary buffer	Secondary buffer
ch0	32 bytes	256 bytes

6. Timer Function

6.1. 32-bit Timer Event Counter (T32A)

6.1.1. Internal Signal Connection Specification

6.1.1.1. Capture Trigger Signal Connection

In the 32-bit timer event counter, capture trigger signal is connected to signals of the following table.

The input trigger signal which has a register name in the trigger selector column of the following table should choose the input trigger used by a trigger selector.

Table 6.1 T32A Capture Trigger Connection (1/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch0	Timer A	T32A00TRGINAPHCK (Other timer output)	-	T32A ch0 timer B output	T32A00OUTB
		T32A00TRGINAPCK (Internal trigger input)	[TSEL0CR8] <INSEL2>	T32A ch0 timer register B0 match trigger	T32A00TRGOUTCMPB0
				T32A ch0 timer register B1 match trigger	T32A00TRGOUTCMPB1
				T32A ch0 timer B overflow trigger	T32A00TRGOUTOFB
				T32A ch0 timer B underflow trigger	T32A00TRGOUTUFB
				[TSEL0CR7]<INSEL1> output	-
				[TSEL0CR7]<INSEL2> output	-
				[TSEL0CR7]<INSEL3> output	-
				[TSEL0CR8]<INSEL0> output	-
	Timer B	T32A00TRGINBPHCK (Other timer output)	-	T32A ch0 timer A output	T32A00OUTA
		T32A00TRGINBPCK (other timer input)	[TSEL0CR8] <INSEL3>	T32A ch0 timer register A0 match trigger	T32A00TRGOUTCMPA0
				T32A ch0 timer register A1 match trigger	T32A00TRGOUTCMPA1
				T32A ch0 timer A overflow trigger	T32A00TRGOUTOFA
				T32A ch0 timer A underflow trigger	T32A00TRGOUTUFA
	Timer C	T32A00TRGINCPHCK (Other timer output)	-	-	-
		T32A00TRGINCPCK (Internal trigger input)	-	-	-
ch1	Timer A	T32A01TRGINAPHCK (Other timer output)	-	T32A ch1 timer B output	T32A01OUTB
		T32A01TRGINAPCK (Internal trigger input)	[TSEL0CR9] <INSEL0>	T32A ch1 timer register B0 match trigger	T32A01TRGOUTCMPB0
				T32A ch1 timer register B1 match trigger	T32A01TRGOUTCMPB1
				T32A ch1 timer B overflow trigger	T32A01TRGOUTOFB
				T32A ch1 timer B underflow trigger	T32A01TRGOUTUFB
				[TSEL0CR7]<INSEL2> output	-
				[TSEL0CR7]<INSEL3> output	-
				[TSEL0CR8] INSEL0> output	-
				[TSEL0CR8]<INSEL1> output	-
	Timer B	T32A01TRGINBPHCK (Other timer output)	-	T32A ch1 timer A output	T32A01OUTA
		T32A01TRGINBPCK (Internal trigger input)	[TSEL0CR9] <INSEL1>	T32A ch1 timer register A0 match trigger	T32A01TRGOUTCMPA0
				T32A ch1 timer register A1 match trigger	T32A01TRGOUTCMPA1
				T32A ch1 timer A overflow trigger	T32A01TRGOUTOFA
				T32A ch1 timer A underflow trigger	T32A01TRGOUTUFA
	Timer C	T32A01TRGINCPHCK (Other timer output)	-	-	-
		T32A00TRGINCPCK (Internal trigger input)	-	-	-

Table 6.2 T32A Capture Trigger Connection (2/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch2	Timer A	T32A02TRGINAPHCK (Other timer output)	-	T32A ch2 timer B output	T32A02OUTB
		T32A02TRGINAPCK (Internal trigger input)	[TSEL0CR9] <INSEL2>	T32A ch2 timer register B0 match trigger	T32A02TRGOUTCMPB0
				T32A ch2 timer register B1 match trigger	T32A02TRGOUTCMPB1
				T32A ch2 timer B overflow trigger	T32A02TRGOUTOFB
				T32A ch2 timer B underflow trigger	T32A02TRGOUTUFB
				[TSEL0CR7]<INSEL3> output	-
				[TSEL0CR8]<INSEL0> output	-
				[TSEL0CR8]<INSEL1> output	-
				[TSEL0CR7]<INSEL1> output	-
	Timer B	T32A02TRGINBPHCK (Other timer output)	-	T32A ch2 timer A output	T32A02OUTA
		T32A02TRGINBPCK (Internal trigger input)	[TSEL0CR9] <INSEL3>	T32A ch2 timer register A0 match trigger	T32A02TRGOUTCMPA0
				T32A ch2 timer register A1 match trigger	T32A02TRGOUTCMPA1
				T32A ch2 timer A overflow trigger	T32A02TRGOUTOFA
				T32A ch2 timer A underflow trigger	T32A02TRGOUTUFA
	Timer C	T32A02TRGINCPHCK (Other timer output)	-	-	-
		T32A02TRGINCPCK (Internal trigger input)	-	-	-
ch3	Timer A	T32A03TRGINAPHCK (Other timer output)	-	T32A ch3 timer B output	T32A03OUTB
		T32A03TRGINAPCK (Internal trigger input)	[TSEL0CR10] <INSEL0>	T32A ch3 timer register B0 match trigger	T32A03TRGOUTCMPB0
				T32A ch3 timer register B1 match trigger	T32A03TRGOUTCMPB1
				T32A ch3 timer B overflow trigger	T32A03TRGOUTOFB
				T32A ch3 timer B underflow trigger	T32A03TRGOUTUFB
				[TSEL0CR8]<INSEL0> output	-
				[TSEL0CR8]<INSEL1> output	-
				[TSEL0CR7]<INSEL1> output	-
				[TSEL0CR7]<INSEL2> output	-
	Timer B	T32A03TRGINBPHCK (Other timer output)	-	T32A ch3 timer A output	T32A03OUTA
		T32A03TRGINBPCK (Internal trigger input)	[TSEL0CR10] <INSEL1>	T32A ch3 timer register A0 match trigger	T32A03TRGOUTCMPA0
				T32A ch3 timer register A1 match trigger	T32A03TRGOUTCMPA1
				T32A ch3 timer A overflow trigger	T32A03TRGOUTOFA
				T32A ch3 timer A underflow trigger	T32A03TRGOUTUFA
	Timer C	T32A03TRGINCPHCK (Other timer output)	-	-	-
		T32A03TRGINCPCK (Internal trigger input)	-	-	-

Table 6.3 T32A Capture Trigger Connection (3/3)

Channel	Timer	Input signal name of capture trigger	Trigger source		
			Trigger selector	Input trigger signal	Signal name
ch4	Timer A	T32A04TRGINAPHCK (Other timer output)	-	T32A ch4 timer B output	T32A04OUTB
		T32A04TRGINAPCK (Internal trigger input)	[TSEL0CR10] <INSEL2>	T32A ch4 timer register B0 match trigger	T32A04TRGOUTCMPB0
				T32A ch4 timer register B1 match trigger	T32A04TRGOUTCMPB1
				T32A ch4 timer B overflow trigger	T32A04TRGOUTOFB
				T32A ch4 timer B underflow trigger	T32A04TRGOUTUFB
				[TSEL0CR8]<INSEL1> output	-
				[TSEL0CR7]<INSEL1> output	-
				[TSEL0CR7]<INSEL2> output	-
				[TSEL0CR7]<INSEL3> output	-
	Timer B	T32A04TRGINBPHCK (Other timer output)	-	T32A ch4 timer A output	T32A04OUTA
		T32A04TRGINBPCK (Internal trigger input)	[TSEL0CR10] <INSEL3>	T32A ch4 timer register A0 match trigger	T32A04TRGOUTCMPA0
				T32A ch4 timer register A1 match trigger	T32A04TRGOUTCMPA1
				T32A ch4 timer A overflow trigger	T32A04TRGOUTOFA
				T32A ch4 timer A underflow trigger	T32A04TRGOUTUFA
	Timer C	T32A04TRGINCPHCK (Other timer output)	-	-	-
		T32A04TRGINCPCK (Internal trigger input)	-	-	-

6.1.1.2. Synchronous Control Connection

In the 32-bit timer event counter, as shown in the following tables, synchronous connection of the timer is carried out within the same channel.

Table 6.4 T32A Synchronous Control Connection Specifications

Channel	Timer	Output		Timer	Input	
		Function	Signal name		Function	Signal name
ch0	Timer A	Synchronous start output A	T32A00SYNCSTARTOUTA	Timer B	Synchronous start B	T32A00SYNCSTARTB
		Synchronous stop output A	T32A00SYNCSTOPOUTA		Synchronous stop B	T32A00SYNCSTOPB
		Synchronous Reload output A	T32A00SYNCRELOADOUTA		Synchronous Reload B	T32A00SYNCRELOADB
ch1	Timer A	Synchronous start output A	T32A01SYNCSTARTOUTA	Timer B	Synchronous start B	T32A01SYNCSTARTB
		Synchronous stop output A	T32A01SYNCSTOPOUTA		Synchronous stop B	T32A01SYNCSTOPB
		Synchronous Reload output A	T32A01SYNCRELOADOUTA		Synchronous Reload B	T32A01SYNCRELOADB
ch2	Timer A	Synchronous start output A	T32A02SYNCSTARTOUTA	Timer B	Synchronous start B	T32A02SYNCSTARTB
		Synchronous stop output A	T32A02SYNCSTOPOUTA		Synchronous stop B	T32A02SYNCSTOPB
		Synchronous Reload output A	T32A02SYNCRELOADOUTA		Synchronous Reload B	T32A02SYNCRELOADB
ch3	Timer A	Synchronous start output A	T32A03SYNCSTARTOUTA	Timer B	Synchronous start B	T32A03SYNCSTARTB
		Synchronous stop output A	T32A03SYNCSTOPOUTA		Synchronous stop B	T32A03SYNCSTOPB
		Synchronous Reload output A	T32A03SYNCRELOADOUTA		Synchronous Reload B	T32A03SYNCRELOADB
ch4	Timer A	Synchronous start output A	T32A04SYNCSTARTOUTA	Timer B	Synchronous start B	T32A04SYNCSTARTB
		Synchronous stop output A	T32A04SYNCSTOPOUTA		Synchronous stop B	T32A04SYNCSTOPB
		Synchronous Reload output A	T32A04SYNCRELOADOUTA		Synchronous Reload B	T32A04SYNCRELOADB

6.1.2. Pulse Counter

The 32-bit timer event counter is the one phase pulse counter only.

7. Motor Control Function

7.1. Motor Control Function Connection

The motor control functions are connected as shown in Figure 7.1 and work together to control the motor.

For details on each function, refer to the reference manual.

ASEL is a function that selects the output of two ADCs. For details, refer to "8.2. ADC Connection Selection Circuit (ASEL)".

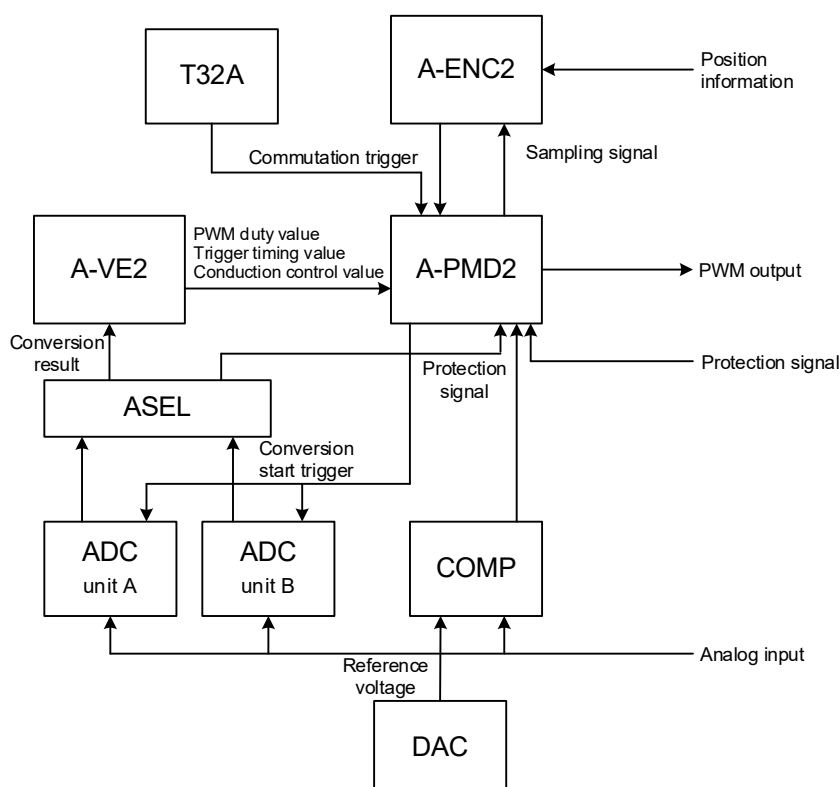


Figure 7.1 Motor Control Function Connection (Outline)

7.2. Advanced Vector Engine 2 (A-VE2)

7.2.1. Internal Signal Connection Specification

Table 7.1 and Table 7.2 show the internal connection specifications.

Table 7.1 A-VE2 Internal Connection Specification: Input

Channel	Input function		Input source	
		Signal name		Signal name
ch0	ADC conversion completion interrupt A	INTADAPDA	ASEL	INTASELPDA
	ADC conversion completion interrupt B	INTADAPDB		INTASELPDB
	AD conversion result 0 (Current 1 data)	ADAREG0		ASELREG0
	AD conversion result 1 (Current 2 data)	ADAREG1		ASELREG1
	AD conversion result 2 (Current 3 data)	ADAREG2		ASELREG2
	AD conversion result 3 (DC voltage data)	ADAREG3		ASELREG3
	Phase selection information	UVWIS0		ASELUVWIS0
		UVWIS1		ASELUVWIS1
		UVWIS2		ASELUVWIS2
		UVWIS3		ASELUVWIS3
	PWM interrupt	INTPWM0	A-PMD2 ch0	INTPWM0

Table 7.2 A-VE2 Internal Connection Specification: Output

Channel	Output function		Output destination	
		Signal name		Signal name
ch0	U-phase PWM duty	VE0CMPU	A-PMD2 ch0	VE0CMPU
	V-phase PWM duty	VE0CMPV		VE0CMPV
	W-phase PWM duty	VE0CMPW		VE0CMPW
	Trigger compare 0	VE0TRGCMP0		VE0TRGCMP0
	Trigger compare 1	VE0TRGCMP1		VE0TRGCMP1
	Synchronous trigger output selection	VE0TRGSEL		VE0TRGSEL
	Conduction control / output control	VE0OUTCR		VE0OUTCR
	Schedule end interrupt	INTVCN0		INTVCN0
	Task transition signal	VE0DBG0		VE0TASKP

7.3. Advanced Programmable Motor Control Circuit 2 (A-PMD2)

7.3.1. Internal Signal Connection Specification

Table 7.3 and Table 7.4 show the internal connection specifications.

Table 7.3 A-PMD2 Inside Connection Specification: Input

Channel	Function input	Signal name	Input source	Signal name
ch0	ADC conversion completion interrupt A	INTADAPDA	ASEL	INTASELPDA
	ADC conversion completion interrupt B	INTADAPDB		INTASELPDB
	ADC conversion completion interrupt C	INTADxPDC	-	-
	ADC conversion completion interrupt D	INTADxPDD		
	ADC conversion priority interrupt	INTADxPFLG		
	ADC monitor function 0 (OVV detection)	ADACMP0L_N	ASEL	ASELCMP0L_N
	ADC monitor function 1 (OVV detection)	ADACMP1L_N		ASELCMP1L_N
	ADC conversion signal	ADABUSY		ASELBUSY
	Commutation trigger (General purpose timer synchronous)	PMD0TMR	T32A ch2	T32A02TRGOUTCMPB0
	Commutation trigger (MCMP synchronous)	ENC0CTRGO	A-ENC2 ch0	ENC0CTRGO
	Commutation trigger (Position detect synchronous) ENC interrupt 0 (debug output)	INTENC00		INTENC00
	ENC interrupt 1 (debug output)	INTENC01		INTENC01
	ENC debug output	ENC0DBG		ENC0DBG
	COMP EMG protection synchronous input	COMP0EMG	COMP ch0	COMP0EMG
		COMP1EMG	COMP ch1	COMP1EMG
		COMP2EMG	COMP ch2	COMP2EMG
		COMP3EMG	COMP ch3	COMP3EMG
		COMP4EMG	COMP ch4	COMP4EMG
		COMP5EMG	COMP ch5	COMP5EMG
	COMP OVV protection synchronous input	COMP0OVV	COMP ch0	COMP0OVV
		COMP1OVV	COMP ch1	COMP1OVV
		COMP2OVV	COMP ch2	COMP2OVV
		COMP3OVV	COMP ch3	COMP3OVV
		COMP4OVV	COMP ch4	COMP4OVV
		COMP5OVV	COMP ch5	COMP5OVV
	VE U-phase PWM duty	VE0CMPU	A-VE2	VE0CMPU
	VE V-phase PWM duty	VE0CMPV		VE0CMPV
	VE W-phase PWM duty	VE0CMPW		VE0CMPW
	VE trigger comparison 0	VE0TRGCMP0		VE0TRGCMP0
	VE trigger comparison 1	VE0TRGCMP1		VE0TRGCMP1
	VE synchronous trigger output selection	VE0TRGSEL		VE0TRGSEL
	VE Conduction control / Output control	VE0OUTCR		VE0OUTCR
	VE Task transition signal	VE0TASKP		VE0DBG0
	VE interrupt	INTVCN0		INTVCN0
	VE EMG release	VExEMGRS	-	-

Table 7.4 A-PMD2 Inside Connection Specification: Output

Channel	Function output	Signal name	Output destination	
			Signal name	
ch0	ADC synchronous trigger output 0	PMD0TRG0	ADC unit A	PMDTRG0
			ADC unit B	PMDTRG0
	ADC synchronous trigger output 1	PMD0TRG1	ADC unit A	PMDTRG1
			ADC unit B	PMDTRG1
	ADC synchronous trigger output 2	PMD0TRG2	ADC unit A	PMDTRG2
			ADC unit B	PMDTRG2
	ADC synchronous trigger output 3	PMD0TRG3	ADC unit A	PMDTRG3
			ADC unit B	PMDTRG3
	ADC synchronous trigger output 4	PMD0TRG4	ADC unit A	PMDTRG4
			ADC unit B	PMDTRG4
	ADC synchronous trigger output 5	PMD0TRG5	ADC unit A	PMDTRG5
			ADC unit B	PMDTRG5
	ADC synchronous trigger output 6	PMD0TRG6	ADC unit A	PMDTRG6
			ADC unit B	PMDTRG6
	PWM signal for encoder	PMD0PWMON	A-ENC2 ch0	ENC0PWMON
	PWM output control	PMD0MDOUT		ENC0MDOUT
	PWM interrupt	INTPWM0	A-VE2 ch0	INTPWM0

7.4. Advanced Encoder Input Circuit 2 (A-ENC2)

7.4.1. Internal Signal Connection Specification

7.4.1.1. T32A/A-ENC2 Connection

Table 7.5 and Table 7.6 show the internal connection specifications.

"-" in the table does not have an applicable function.

Table 7.5 A-ENC2 Internal Connection Specification: Input

Channel	Function input		Input source	
		Signal name		Signal name
ch0	General purpose timer output signal	ENC0PSGI	T32A ch2 timer output A	T32A02OUTA
	PWM signal for sampling	ENC0PWMON	A-PMD2 ch0 PWM signal	PMD0PWMON
	PWM output control	PMD0MDOUT	A-PMD2 ch0 PWM output control	PMD0MDOUT

Table 7.6 A-ENC2 Internal Connection Specification: Output

Channel	Function output		Trigger selector	Output destination	
		Signal name			Signal name
ch0	Divided pulse signal	ENC0TIMPLS	[TSEL0CR7] <INSEL3>	TRGSEL [TSEL0CR8]<INSEL2> input [TSEL0CR9]<INSEL0> input [TSEL0CR9]<INSEL2> input [TSEL0CR10]<INSEL2> input	-
	Commutation trigger	ENC0CTRGO	-	A-PMD2 ch0 commutation trigger (Electrical angle synchronous)	ENC0CTRGO
	Encoder input interrupt 0	INTENC00	-	A-PMD2 ch0 commutation trigger (Position detection synchronous) ENC interrupt 0 (debug output)	INTENC00
	Encoder input interrupt 1	INTENC01	-	A-PMD2 ch0 ENC interrupt 1 (debug output)	INTENC01
	Debug output	ENC0DBG	-	A-PMD2 ch0 ENC debug output	ENC0DBG

8. Analog Function

8.1. 12-bit Analog to Digital Converter (ADC)

8.1.1. Corresponding Registers

The following table shows the correspondence registers for each unit of TMPM4L Group(1).

Table 8.1 ADC Corresponding Registers for Each Unit

Unit	General purpose start-up factor program register	Conversion result storage register
A	[ADATSET0] to [ADATSET23]	[ADAREG0] to [ADAREG23]
B	[ADBTSET0] to [ADBTSET23]	[ADBREG0] to [ADBREG23]

8.1.2. Function Pin and Port

The functional pins are assigned to the port of the following tables.

There is also a channel which does not have functional pins depending on a product.

Table 8.2 ADC Function Pin and Port

Unit	Signal input	Function pin/ signal name	Port	Product list (✓: Available, - : N/A)		
				M4L4	M4L2	M4L1
A/B	AINA00/AINB00	AINA00/AINB0	PE0	✓	✓	✓
	AINA01/AINB01	AINA01/AINB01	PE1	✓	✓	✓
	AINA02/AINB02	AINA02/AINB02	PE2	✓	✓	✓
	AINA03/AINB03	AINA03/AINB03	PE3	✓	✓	✓
	AINA04/AINB04	AINA04/AINB04	PE4	✓	-	-
	AINA05/AINB05	AINA05/AINB05	PE5	✓	-	-
	AINA06/AINB06	AINA06/AINB06	PE6	✓	-	-
	AINA07/AINB07	AINA07/AINB07	PE7	✓	-	-
	AINA08/AINB08	AINA08/AINB08	PF0	✓	-	-
	AINA09/AINB09	AINA09/AINB09	PF1	✓	✓	✓
	AINA10/AINB10	AINA10/AINB10	PF2	✓	✓	✓
	AINA11/AINB11	AINA11/AINB11	PF3	✓	✓	✓
	AINA12/AINB12	AINA12/AINB12	PF4	✓	✓	✓
	AINA13/AINB13	AINA13/AINB13	PF5	✓	✓	-
	AINA14/AINB14	VREFH	-	✓	✓	✓
	AINA15/AINB15	VREFL	-	✓	✓	✓
	AINA16/AINB16	Reference power supply (Note2)	-	✓	✓	✓
	AINA17/AINB17	DAC0	-	✓	✓	✓
	AINA18/AINB18	DAC1	-	✓	✓	✓

Note1: For both units A and B, AINA14/AINB14 to AINA16/AINB16 are connected internally for self-check function support.

Note2: For reference power supply, refer to the electrical characteristics of "TMPM4L Group(1) Data Sheet".

8.1.3. Setting Value of Mode Setting Register 2

For the setting value of mode setting register 2 ($[ADxMOD2]$), set the values in the table below.

Table 8.3 Setting Value of ADC Mode Setting Register 2

Register name	Value
$[ADxMOD2]<MOD2[31:0]>$	0x00000000

8.1.4. Trimming Setting Register Setting Value

For the trimming setting register ($[ADxTRM]$), set the values in the table below.

Table 8.4 Setting Value of Trimming Setting Register

Register name	Value
$[ADxTRM]<TRM[31:0]>$	0x00000000

8.1.5. Internal Signal Connection Specification

Table 8.5 and Table 8.6 show the internal connection specifications. For input trigger signals with a register name in the trigger selector column, select the input trigger to be used with the trigger selector. "-" in the table does not have an applicable function.

Table 8.5 ADC Startup Trigger Connection Specifications

Unit	Function input		Trigger selector	Input source	
		Signal name			Signal name
A	PMD trigger 0	PMDTRG0	-	A-PMD2 ch0	PMD0TRG0
	PMD trigger 1	PMDTRG1	-		PMD0TRG1
	PMD trigger 2	PMDTRG2	-		PMD0TRG2
	PMD trigger 3	PMDTRG3	-		PMD0TRG3
	PMD trigger 4	PMDTRG4	-		PMD0TRG4
	PMD trigger 5	PMDTRG5	-		PMD0TRG5
	PMD trigger 6	PMDTRG6	-		PMD0TRG6
	PMD trigger 7	PMDTRG7	-	-	-
	PMD trigger 8	PMDTRG8	-		
	PMD trigger 9	PMDTRG9	-		
	PMD trigger 10	PMDTRG10	-		
	PMD trigger 11	PMDTRG11	-		
	General purpose trigger	ADATRGIN	[TSEL0CR4] <INSEL2>	PC0 (TRGIN0)	TRGIN0
				PA5 (TRGIN1)	TRGIN1
				PG1 (TRGIN2)	TRGIN2
				T32A ch0	T32A00TRGOUTCMPA1
					T32A00TRGOUTCMPB1
					T32A00TRGOUTCMPC1
				T32A ch3	T32A03TRGOUTCMPA0
				T32A ch4	T32A04TRGOUTCMPA0
B	PMD0 PMD trigger 0	PMDTRG0	-	A-PMD2 ch0	PMD0TRG0
	PMD0 PMD trigger 1	PMDTRG1	-		PMD0TRG1
	PMD0 PMD trigger 2	PMDTRG2	-		PMD0TRG2
	PMD0 PMD trigger 3	PMDTRG3	-		PMD0TRG3
	PMD0 PMD trigger 4	PMDTRG4	-		PMD0TRG4
	PMD0 PMD trigger 5	PMDTRG5	-		PMD0TRG5
	PMD0 PMD trigger 6	PMDTRG6	-		PMD0TRG6
	PMD trigger 7	PMDTRG7	-	-	-
	PMD trigger 8	PMDTRG8	-		
	PMD trigger 9	PMDTRG9	-		
	PMD trigger 10	PMDTRG10	-		
	PMD trigger 11	PMDTRG11	-		
	General purpose trigger	ADBTRGIN	[TSEL0CR4] <INSEL3>	PC0 (TRGIN0)	TRGIN0
				PA5 (TRGIN1)	TRGIN1
				PG1 (TRGIN2)	TRGIN2
				T32A ch1	T32A01TRGOUTCMPA1
					T32A01TRGOUTCMPB1
					T32A01TRGOUTCMPC1
				T32A ch3	T32A03TRGOUTCMPA1
				T32A ch4	T32A04TRGOUTCMPA1

Table 8.6 ADC Inside Connection: Output

Unit	Function output		Trigger selector	Output destination	
		Signal name			Signal name
A	General purpose trigger interrupt	INTADATRG	[TSEL0CR8] <INSEL0>	TRGSEL [TSEL0CR8] <INSEL2> input [TSEL0CR9] <INSEL0> input <INSEL2> input [TSEL0CR10] <INSEL0> input	-
	Single conversion interrupt	INTADASGL			
	Continuous conversion interrupt	INTADACNT			
	Monitor function 0 interrupt	INTADACP0			
	Monitor function 1 interrupt	INTADACP1			
	Monitor function 0 output for PMD protect function	ADACP0L_N	-	ASEL	ADACMP0L_N
	Monitor function 1 output for PMD protect function	ADACP1L_N	-		ADACMP1L_N
	PMD trigger interrupt A	INTADAPDA	-		INTADAPDA
	PMD trigger interrupt B	INTADAPDB	-		INTADAPDB
	AD conversion flag	ADABUSY	-		ADABUSY
	Conversion result storing register	ADAREG0	-	ASEL	ADAREG0
		ADAREG1	-		ADAREG1
		ADAREG2	-		ADAREG2
		ADAREG3	-		ADAREG3
	Phase select information	ADAUVWIS0	-		ADAUVWIS0
		ADAUVWIS1	-		ADAUVWIS1
		ADAUVWIS2	-		ADAUVWIS2
		ADAUVWIS3	-		ADAUVWIS3
B	General purpose trigger interrupt	INTADBTRG	[TSEL0CR8] <INSEL1>	TRGSEL [TSEL0CR9] <INSEL0> input <INSEL2> input [TSEL0CR10] <INSEL0> input <INSEL2> input	-
	Single conversion interrupt	INTADBSGL			
	Continuous conversion interrupt	INTADBCNT			
	Monitor function 0 interrupt	INTADBCP0			
	Monitor function 0 output for PMD protect function	ADBCP0L_N	-	ASEL	ADBCMP0L_N
	Monitor function 1 output for PMD protect function	ADBCP1L_N	-		ADBCMP1L_N
	PMD trigger interrupt A	INTADBPDA	-		INTADBPDA
	PMD trigger interrupt B	INTADBPDB	-		INTADBPDB
	AD conversion flag	ADBBUSY	-		ADBBUSY
	Conversion result storing register	ADBREG0	-		ADBREG0
		ADBREG1	-		ADBREG1
		ADBREG2	-		ADBREG2
		ADBREG3	-		ADBREG3
	Phase select information	ADBUVWIS0	-		ADBUVWIS0
		ADBUVWIS1	-		ADBUVWIS1
		ADBUVWIS2	-		ADBUVWIS2
		ADBUVWIS3	-		ADBUVWIS3

8.2. ADC Connection Selection Circuit (ASEL)

8.2.1. Outlines

ASEL selects signals from the outputs of the two ADC units. The output signals are connected to A-VE2 and A-PMD2. When using A-VE2 and A-PMD2, set ASEL as required.

The connection between the ASEL and the peripheral functions is shown in Figure 8.1

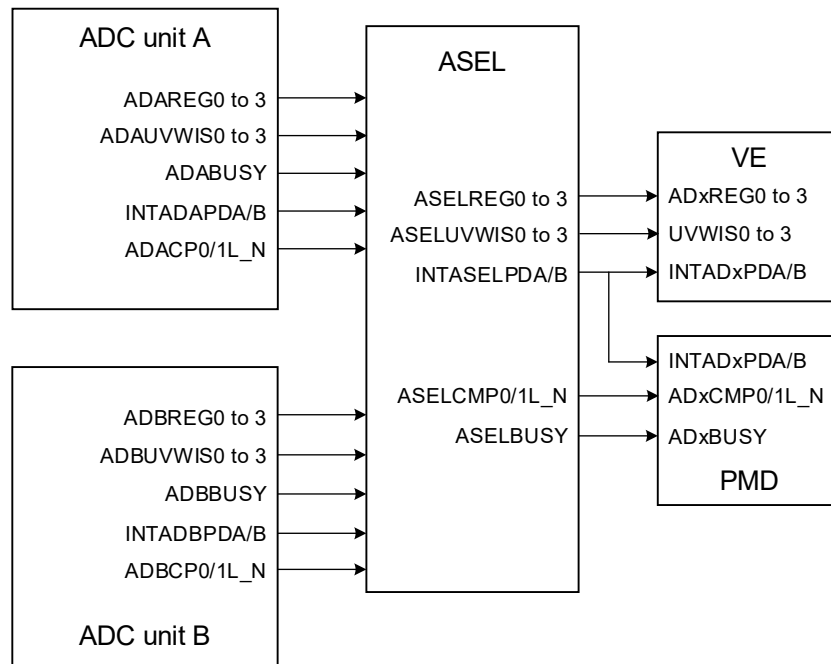


Figure 8.1 Connection Between ASEL and Peripheral Functions

8.2.2. Configuration

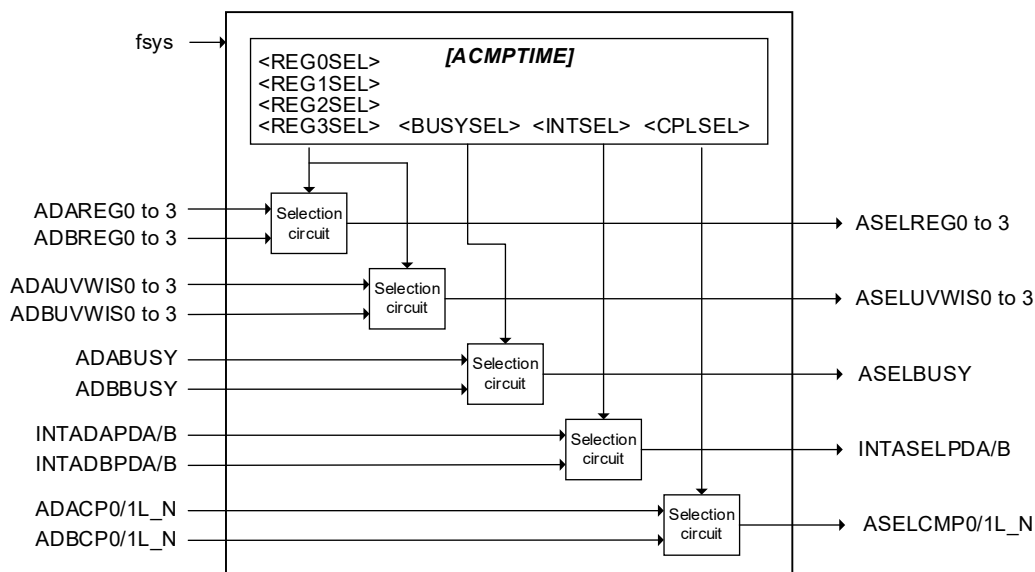


Figure 8.2 ASEL Block Diagram

Table 8.7 List of Signal

No	Signal name		I/O	Related reference manual
1	fsys	System clock	Input	Clock Control and Operation Mode
2	ADAREG0 to 3	ADC unit A conversion result 0 to 3	Input	Product Information (Chapter 8.1.5)
3	ADBREG0 to 3	ADC unit B conversion result 0 to 3	Input	Product Information (Chapter 8.1.5)
4	ADAUVWIS0 to 3	ADC unit A phase select information 0 to 3	Input	Product Information (Chapter 8.1.5)
5	ADBUVWIS0 to 3	ADC unit B phase select information 0 to 3	Input	Product Information (Chapter 8.1.5)
6	ADABUSY	ADC unit A conversion in progress flag	Input	Product Information (Chapter 8.1.5)
7	ADBBUSY	ADC unit B conversion in progress flag	Input	Product Information (Chapter 8.1.5)
8	INTADAPDA/B	ADC unit A PMD trigger interrupt A/B	Input	Product Information (Chapter 8.1.5)
9	INTADBPDA/B	ADC unit B PMD trigger interrupt A/B	Input	Product Information (Chapter 8.1.5)
10	ADACP0/1L_N	ADC unit A monitor function 0/1	Input	Product Information (Chapter 8.1.5)
11	ADBCP0/1L_N	ADC unit B monitor function 0/1	Input	Product Information (Chapter 8.1.5)
12	ASELAREG0 to 3	ADC conversion result 0 to 3	Output	Product Information (Chapter 7.2.1)
13	ASELUVWIS0 to 3	ADC phase select information 0 to 3	Output	Product Information (Chapter 7.2.1)
14	ASELBUSY	ADC conversion in progress flag	Output	Product Information (Chapter 7.3.1)
15	INTASELPDA/B	ADC PMD trigger interrupt A/B	Output	Product Information (Chapter 7.2.1) Product Information (Chapter 7.3.1)
16	ASELCMP0/1L_N	ADC monitor function 0/1	Output	Product Information (Chapter 7.3.1)

8.2.3. Explanation of Functions and Operation

When using ASEL, set the appropriate clock enable bit to "1" (clock supplied) in the fsys supply stop register B (*CGFSYSENB*).

The *[ASELADCS]* register selects one of the two ADC units output signals. *[ASELADCS]* should be set with the ADC stopped.

The selection targets are as follows. For the monitor function 0/1 and the conversion in progress flag, the logical OR of the two ADC units outputs can also be selected.

- Conversion result 0 to 3
- Phase select information 0 to 3
- Conversion in progress flag
- PMD trigger interrupt A/B
- Monitor function 0/1

8.2.4. Register

The control registers and addresses are as follows

Peripheral functions		Channel/unit	Base address
ADC connection selection circuit	ASEL	-	0x40078000

register name		Address (base+)
ADC Selection Register	<i>[ASELADCS]</i>	0x0000

8.2.4.1. [ASELADCS] (ADC Selection Register)

Bit	Bit symbol	After reset	Type	Function
31:9	-	0	R	Read as "0".
8:7	CPLSEL[1:0]	00	R/W	Selection of monitor function 0/1 00: Unit A 01: Unit B 10: Logical OR of unit A and unit B 11: Reserved
6:5	BUSYSEL[1:0]	00	R/W	Selection of conversion in progress flag 00: Unit A 01: Unit B 10: Logical OR of unit A and unit B 11: Reserved
4	INTSEL	0	R/W	Selection of PMD trigger interrupt 0: Unit A 1: Unit B
3	REG3SEL	0	R/W	Selection of conversion result 3 and phase select information 3 0: Unit A 1: Unit B
2	REG2SEL	0	R/W	Selection of conversion result 2 and phase select information 2 0: Unit A 1: Unit B
1	REG1SEL	0	R/W	Selection of conversion result 1 and phase select information 1 0: Unit A 1: Unit B
0	REG0SEL	0	R/W	Selection of conversion result 0 and phase select information 0 0: Unit A 1: Unit B

8.3. Comparator (COMP)

8.3.1. Internal Signal Connection Specification

Table 8.8 and Table 8.9 show the internal connection specifications.

Table 8.8 COMP Internal Connection Specification: Input

Channel	Signal input		Input source	
		Signal name		Signal name
ch0	Analog input 0	COMP0AIN0	PF1 pin	AINA09/AINB09
	Analog input 1	COMP0AIN1	PE1 pin	AINA01/AINB01
	Analog input 2	COMP0AIN2	-	-
	Reference voltage 0	COMP0RIN0	DAC ch0	DAC0
	Reference voltage 1	COMP0RIN1	-	-
ch1	Analog input 0	COMP1AIN0	PF1 pin	AINA09/AINB09
	Analog input 1	COMP1AIN1	PE1 pin	AINA01/AINB01
	Analog input 2	COMP1AIN2	-	-
	Reference voltage 0	COMP1RIN0	DAC ch1	DAC1
	Reference voltage 1	COMP1RIN1	-	-
ch2	Analog input 0	COMP2AIN0	PF2 pin	AINA10/AINB10
	Analog input 1	COMP2AIN1	PE2 pin	AINA02/AINB02
	Analog input 2	COMP2AIN2	-	-
	Reference voltage 0	COMP2RIN0	DAC ch0	DAC0
	Reference voltage 1	COMP2RIN1	-	-
ch3	Analog input 0	COMP3AIN0	PF2 pin	AINA10/AINB10
	Analog input 1	COMP3AIN1	PE2 pin	AINA02/AINB02
	Analog input 2	COMP3AIN2	-	-
	Reference voltage 0	COMP3RIN0	DAC ch1	DAC1
	Reference voltage 1	COMP3RIN1	-	-
ch4	Analog input 0	COMP4AIN0	PF3 pin	AINA11/AINB11
	Analog input 1	COMP4AIN1	PE3 pin	AINA03/AINB03
	Analog input 2	COMP4AIN2	-	-
	Reference voltage 0	COMP4RIN0	DAC ch0	DAC0
	Reference voltage 1	COMP4RIN1	-	-
ch5	Analog input 0	COMP5AIN0	PF3 pin	AINA11/AINB11
	Analog input 1	COMP5AIN1	PE3 pin	AINA03/AINB03
	Analog input 2	COMP5AIN2	-	-
	Reference voltage 0	COMP5RIN0	DAC ch1	DAC1
	Reference voltage 1	COMP5RIN1	-	-

Table 8.9 COMP Internal Connection Specification: Output

Channel	Function output		Output destination	
		Signal name		Signal name
ch0	OVV detection	COMP0OVV	A-PMD2 ch0	COMP0OVV
	EMG detection	COMP0EMG		COMP0EMG
ch1	OVV detection	COMP1OVV		COMP1OVV
	EMG detection	COMP1EMG		COMP1EMG
ch2	OVV detection	COMP2OVV		COMP2OVV
	EMG detection	COMP2EMG		COMP2EMG
ch3	OVV detection	COMP3OVV		COMP3OVV
	EMG detection	COMP3EMG		COMP3EMG
ch4	OVV detection	COMP4OVV		COMP4OVV
	EMG detection	COMP4EMG		COMP4EMG
ch5	OVV detection	COMP5OVV		COMP5OVV
	EMG detection	COMP5EMG		COMP5EMG

8.4. 8-bit Digital to Analog Converter (DAC)

8.4.1. Internal Signal Connection Specification

Table 8.10 show the internal connection specifications.

Table 8.10 DAC Internal Connection Specification: Output

Channel	Function output	Output destination		
		Signal name	Signal name	
ch0	DAC output	DAC0	COMP0 reference voltage 0	COMP0RIN0
			COMP2 reference voltage 0	COMP2RIN0
			COMP4 reference voltage 0	COMP4RIN0
			ADC unit A	AINA17
			ADC unit B	AINB17
ch1	DAC output	DAC1	COMP1 reference voltage 0	COMP1RIN0
			COMP3 reference voltage 0	COMP3RIN0
			COMP5 reference voltage 0	COMP5RIN0
			ADC unit A	AINA18
			ADC unit B	AINB18

9. System Function

9.1. Voltage Detection Circuit (LVD)

9.1.1. Detection Power Supply

A voltage detecting circuit monitors the power supply of the following tables.

Table 9.1 LVD Detection Power Supply

Detection power supply	Power supply name
Digital power source	DVDD5A/DVDD5B

9.1.2. LVD Control Register Setting

The after reset value and possible settings of LVD control register *[LVDCR]* <LVL[2:0]> are as follows:

Table 9.2 LVD Control Register *[LVDCR]*<LVL[2:0]> Setting

Bit	Bit symbol	After reset	Function
6:4	<LVL[2:0]>	000	Detection/release voltage setting Detection voltage Release voltage 000: 2.65V 2.7V 001: 2.7V 2.75V 010: 2.8V 2.85V 011: 2.9V 2.95V 100: 4.0V 4.05V 101: 4.2V 4.25V 110: 4.4V 4.45V 111: 4.6V 4.65V

9.2. Clock Selective Watchdog Timer (SIWDT)

9.2.1. Output Control

To select the Internal High speed oscillator 2 (f_{IHOSC2}), Rewriting of the internal High speed oscillator2 can be forbidden.

Table 9.3 SIWDT Output Control

Output control	Signal name	Remark
Protect signal of Internal High speed oscillator 2 control bit ([CGOSCCR] <IHOSC2EN>)	OSCPRO	Setting by [SIWD0OSCCR] <OSCPRO>

9.3. Oscillation Frequency Detection Circuit (OFD)

9.3.1. Reference Clock

The Oscillation frequency detection circuit operates considering the clock of the following tables as a reference clock.

Table 9.4 OFD Reference Clock

Reference clock	Signal name	Divide value
Internal High speed oscillator 2	f_{IHOSC2}	256

10. Memory

10.1. Flash Memory

10.1.1. Access Control Register [FCACCR] Setting

The settings of access control register [FCACCR] is as follows:
In TMPM4L Group(1), use [FCACCR] with the value after reset.

Table 10.1 Access Control Register [FCACCR] Setting

Bit	Bit symbol	After reset	Function
10:8	-	011	-
1:0	<FCLC[1:0]>	11	Code flash read clock control

10.1.2. Macro Code at ID-Read

The macro code values for this product are as follows:

Table 10.2 Macro Code at ID-Read

Code	ID[15:0]
Macro code (Code Flash)	0x0508

10.1.3. Single Boot Resource

The peripheral function of the following table is used in single boot.

Table 10.3 Single Boot Resource

Peripheral function	Channel	Function	Pin name
BOOT	-	-	PG0 (BOOT_N)
UART	ch0	RXD	PD2 (UT0RXD)
		TXD	PD3 (UT0TXDA)
T32A	ch0	-	-

10.2. RAM Parity (RAMP)

10.2.1. Error Detection Block Area

The following table shows the detection RAM block area of each product.

Table 10.4 RAM Area and Address of RAMP

Register name	RAM area address	Products (✓: Available, - : N/A)		
		M4L4	M4L2	M4L1
[RPARST]<RPARFG1>	0x20004000-0x20007FFF	✓	✓	✓
[RPARST]<RPARFG0>	0x20000000-0x20003FFF	✓	✓	✓

11. Other Function

11.1. Digital Noise Filter (DNF)

11.1.1. External Interrupt Pin and Setting Register

Table 11.1 shows the external interrupt pins and the corresponding DNF setting registers.

Table 11.1 External Interrupt Pins and DNF Setting Registers

Unit	External interrupt pin (Signal name)	Setting register name
A	INT00	<i>[DNFAENCR]<NFEN0></i>
	INT01	<i>[DNFAENCR]<NFEN1></i>
	INT02	<i>[DNFAENCR]<NFEN2></i>
	INT03	<i>[DNFAENCR]<NFEN3></i>
	INT04	<i>[DNFAENCR]<NFEN4></i>
	INT05	<i>[DNFAENCR]<NFEN5></i>
	INT06	<i>[DNFAENCR]<NFEN6></i>
	INT07	<i>[DNFAENCR]<NFEN7></i>
	INT08	<i>[DNFAENCR]<NFEN8></i>
	INT09	<i>[DNFAENCR]<NFEN9></i>
	INT10	<i>[DNFAENCR]<NFEN10></i>
	INT11	<i>[DNFAENCR]<NFEN11></i>
	INT12	<i>[DNFAENCR]<NFEN12></i>
	INT13	<i>[DNFAENCR]<NFEN13></i>
	INT14	<i>[DNFAENCR]<NFEN14></i>
	INT15	<i>[DNFAENCR]<NFEN15></i>
B	INT16	<i>[DNFBENCR]<NFEN0></i>
	INT17	<i>[DNFBENCR]<NFEN1></i>
	INT18	<i>[DNFBENCR]<NFEN2></i>
	INT19	<i>[DNFBENCR]<NFEN3></i>
	INT20	<i>[DNFBENCR]<NFEN4></i>

12. Revision History

Table 12.1 Revision History

Revision	Date	Description
1.0	2026-01-30	- First release

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**