TOSHIBA CCD Linear Image Sensor　CCD (Charge Coupled Device)


TCD2719DG

TOSHIBA CCD Linear Image Sensor　CCD (Charge Coupled Device)

TCD2719DG

The TCD2719DG is a high sensitive and low dark current 7300 elements × 3 lines output CCD color linear image sensor.


The device contains a row of 7300 elements × 3 lines photodiodes which provide 24 lines/mm across a A3 size paper. The device is operated by 5.0 V pulse and 10 V power supply.

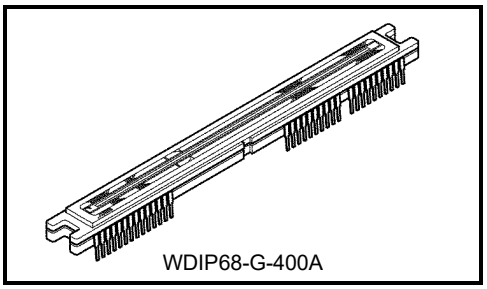
WDIP68-G-400A

Features

- Number of Image Sensing Elements: 7300 elements × 3 lines
- Image Sensing Element Size: 10 μm by 10 μm on 10 μm center
- Photo Sensing Region: High sensitive PN photodiode
- Clock: 2-phase (5 V)
- Power Supply Voltage: 10 V (typ.)
- Distance between Photodiode Array: 40 μm (4 lines) R array – G array, G array – B array
- Internal Circuit: Clamp circuit, Sample and hold circuit
- Package: 68 pin CERDIP
- Color Filter: Red, Green, Blue

Pin Connections (top view)

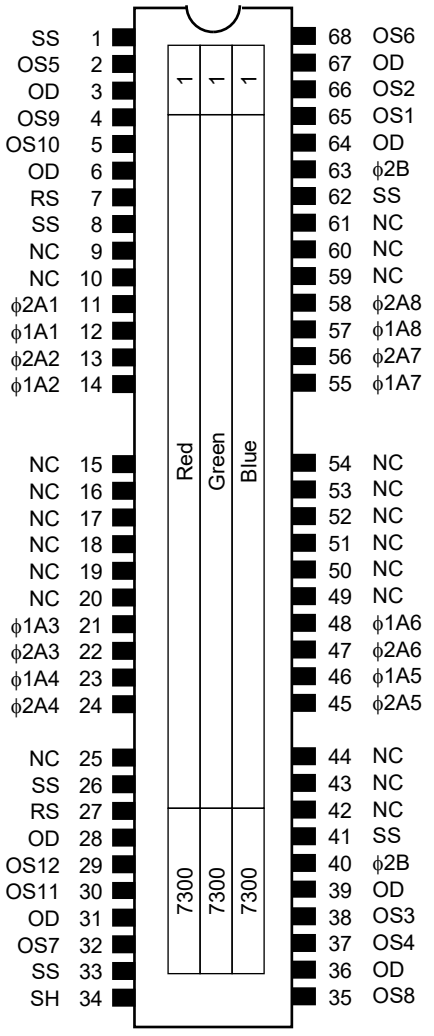


ABSOLUTE MAXIMUM RATINGS (Note 1)

Characteristics	Symbol	Rating	Unit
Clock pulse voltage	$V_{\phi A}$	−0.3 to +8.0	V
Last stage clock pulse voltage	$V_{\phi B}$		
Shift pulse voltage	V_{SH}		
Reset pulse voltage	V_{RS}		
Power supply voltage	V_{OD}	−0.3 to +13.5	V
Operating temperature	T_{opr}	0 to 60	°C
Storage temperature	T_{stg}	−30 to +85	°C

Note 1: All voltages are with respect to SS terminals (ground).
None of the ABSOLUTE MAXIMUM RATINGS must be exceeded, even instantaneously.
If any one of the ABSOLUTE MAXIMUM RATINGS is exceeded, the electrical characteristics, reliability and life time of the device cannot be guaranteed. If the ABSOLUTE MAXIMUM RATINGS are exceeded, the device can be permanently damaged or degraded. Create a system design in such a manner that any of the ABSOLUTE MAXIMUM RATINGS will not be exceeded under any circumstances.

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Circuit Diagram

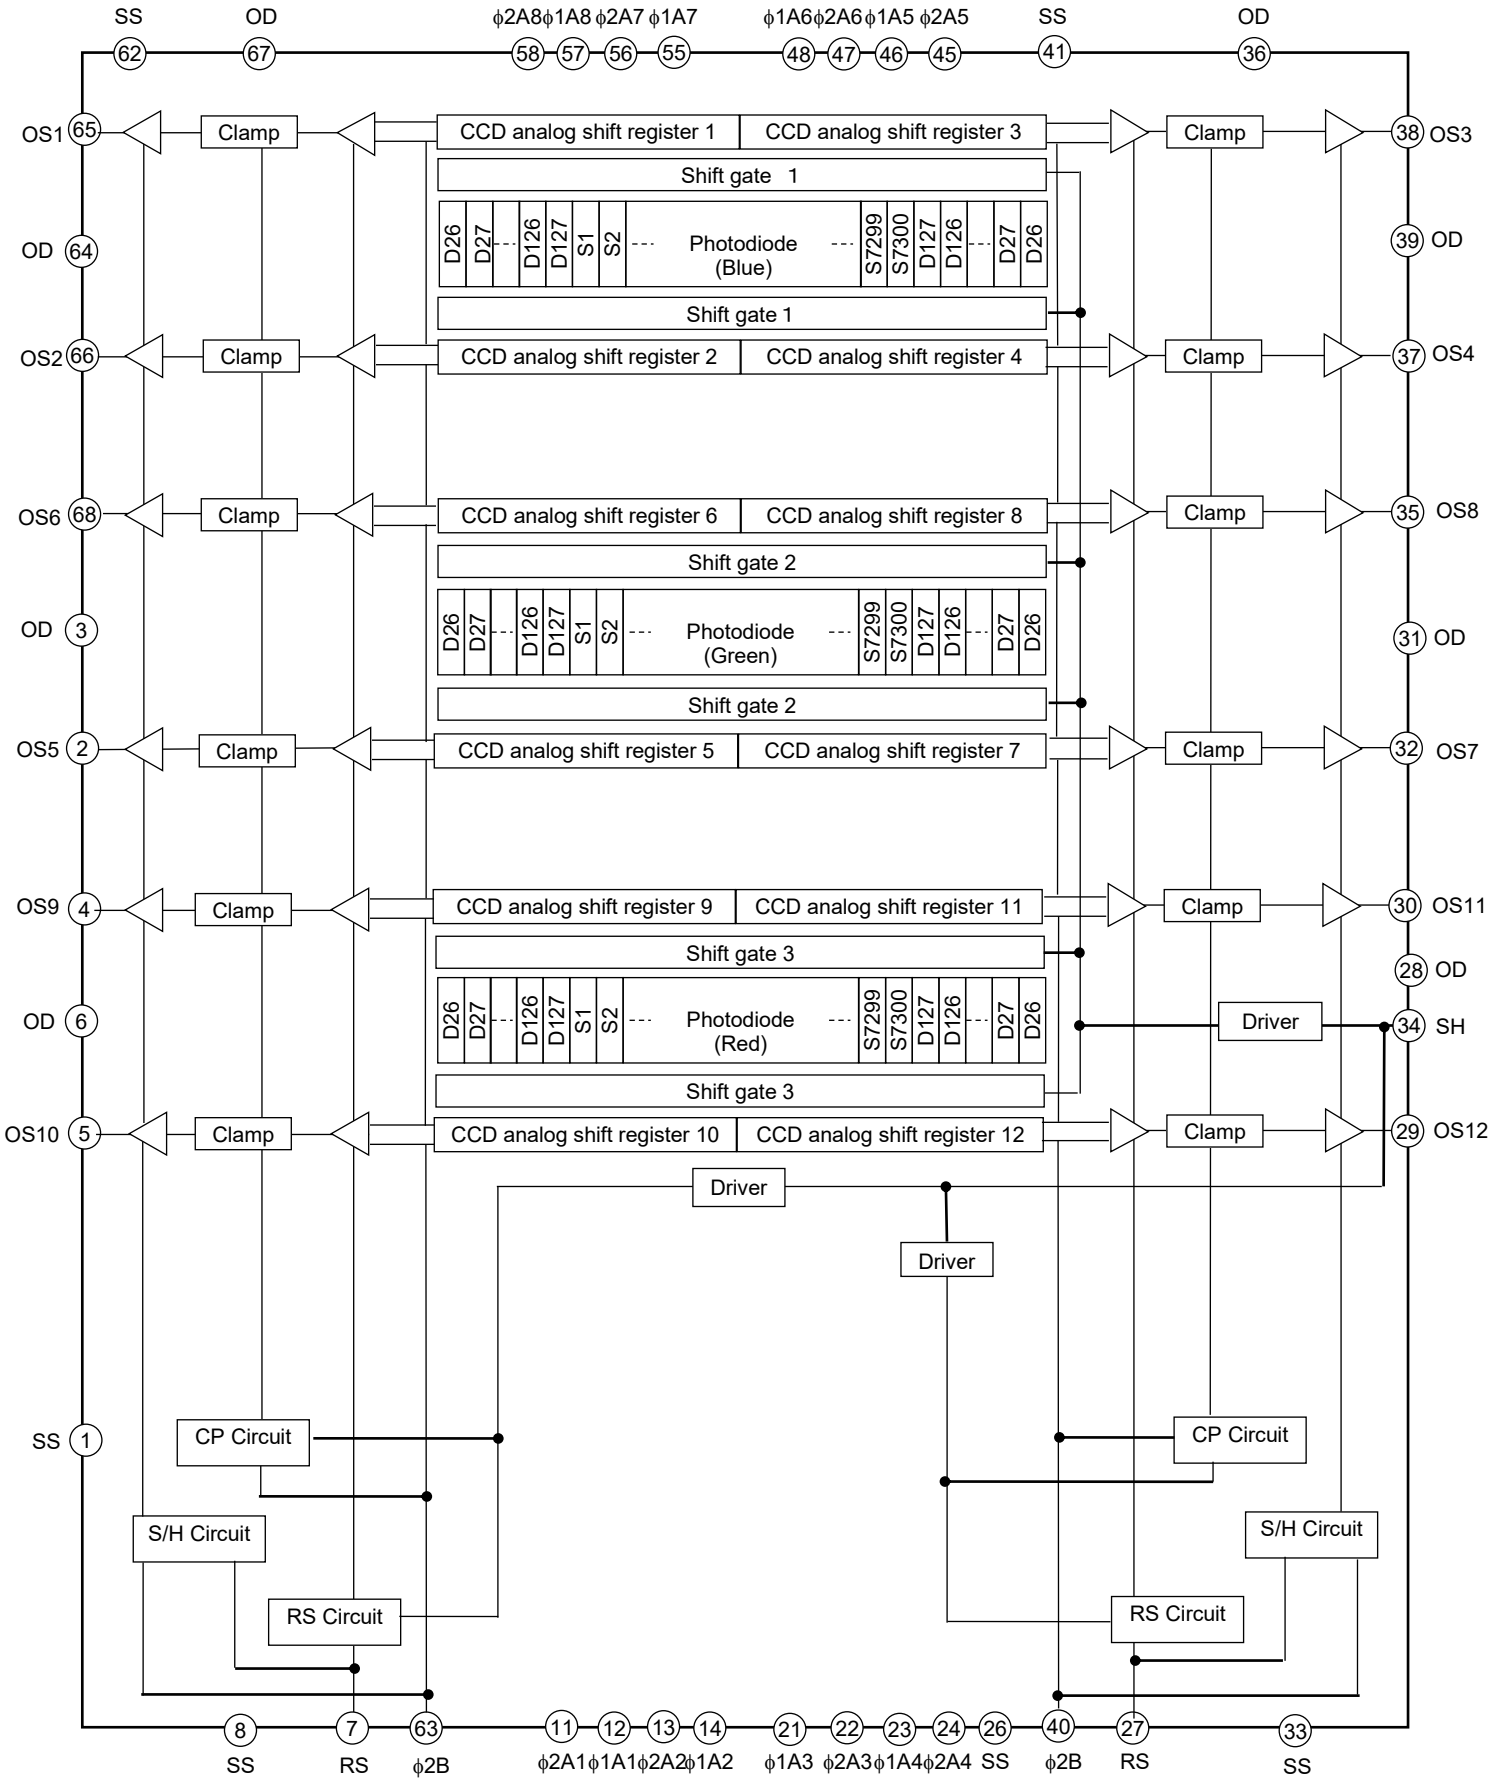

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Pin Names

Pin No.	Symbol	Name	Pin No.	Symbol	Name
1	SS	Ground	68	OS6	Output signal 6 (Green(Even)-F)
2	OS5	Output signal 5 (Green(Odd)-F)	67	OD	Power supply
3	OD	Power supply	66	OS2	Output signal 2 (Blue(Even)-F)
4	OS9	Output signal 9 (Red(Odd)-F)	65	OS1	Output signal 1 (Blue(Odd)-F)
5	OS10	Output signal 10 (Red(Even)-F)	64	OD	Power supply
6	OD	Power supply	63	ϕ2B	Last stage transfer clock (phase 2)
7	RS	Reset gate	62	SS	Ground
8	SS	Ground	61	NC	Non connection
9	NC	Non connection	60	NC	Non connection
10	NC	Non connection	59	NC	Non connection
11	ϕ2A1	Transfer clock 1 (phase 2)	58	ϕ2A8	Transfer clock 8 (phase 2)
12	ϕ1A1	Transfer clock 1 (phase 1)	57	ϕ1A8	Transfer clock 8 (phase 1)
13	ϕ2A2	Transfer clock 2 (phase 2)	56	ϕ2A7	Transfer clock 7 (phase 2)
14	ϕ1A2	Transfer clock 2 (phase 1)	55	ϕ1A7	Transfer clock 7 (phase 1)
15	NC	Non connection	54	NC	Non connection
16	NC	Non connection	53	NC	Non connection
17	NC	Non connection	52	NC	Non connection
18	NC	Non connection	51	NC	Non connection
19	NC	Non connection	50	NC	Non connection
20	NC	Non connection	49	NC	Non connection
21	ϕ1A3	Transfer clock 3 (phase 1)	48	ϕ1A6	Transfer clock 6 (phase 1)
22	ϕ2A3	Transfer clock 3 (phase 2)	47	ϕ2A6	Transfer clock 6 (phase 2)
23	ϕ1A4	Transfer clock 4 (phase 1)	46	ϕ1A5	Transfer clock 5 (phase 1)
24	ϕ2A4	Transfer clock 4 (phase 2)	45	ϕ2A5	Transfer clock 5 (phase 2)
25	NC	Non connection	44	NC	Non connection
26	SS	Ground	43	NC	Non connection
27	RS	Reset gate	42	NC	Non connection
28	OD	Power supply	41	SS	Ground
29	OS12	Output signal 12 (Red(Even)-L)	40	ϕ2B	Last stage transfer clock (phase 2)
30	OS11	Output signal 11 (Red(Odd)-L)	39	OD	Power supply
31	OD	Power supply	38	OS3	Output signal 3 (Blue(Odd)-L)
32	OS7	Output signal 7 (Green(Odd)-L)	37	OS4	Output signal 4 (Blue(Even)-L)
33	SS	Ground	36	OD	Power supply
34	SH	Shift gate	35	OS8	Output signal 8 (Green(Even)-L)

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Optical/Electrical Characteristics (Bit Clamp)

Ta = 25°C, V_{OD} = 10 V, V_{ϕ} = V_{RS} = V_{SH} = 5 V (pulse), f_{ϕ} = 1.0 MHz, t_{INT} (integration time) = 10 ms, light source = A light source + CM500S (t = 1.0 mm)

Characteristics		Symbol	Min	Typ.	Max	Unit	Note
Sensitivity	Red	R_R	8.05	11.50	14.95	V/lx·s	(Note 2)
	Green	R_G	7.49	10.70	13.91		
	Blue	R_B	3.36	4.80	6.24		
Photo response non uniformity		PRNU (1)	—	10	20	%	(Note 3)
		PRNU (3)	—	3	12	mV	(Note 4)
Saturation output voltage		V_{SAT}	1.2	1.5	—	V	(Note 5)
Saturation exposure		SE	0.08	0.14	—	lx·s	(Note 6)
Dark signal voltage		V_{DRK}	—	2	6	mV	(Note 7)
Dark signal non uniformity		DSNU	—	8	12	mV	(Note 8)
DC power dissipation		P_D	—	1750	2685	mW	—
Total transfer efficiency		TTE	92	97	—	%	—
Output impedance		Z_O	—	0.2	0.5	kΩ	—
DC output signal voltage		V_{OS}	3.5	5.0	6.5	V	(Note 9)
Random noise		$N_{D\sigma}$	—	0.8	—	mV	(Note 10)

Note 2: Sensitivity is defined for each color of signal outputs average when the photosensitive surface is applied with the light of uniform illumination and uniform color temperature.

Note 3: PRNU (1) is defined for each color on a single chip by the expressions below when the photosensitive surface is applied with the light of uniform illumination and uniform color temperature, where measured approximately 600 mV of signal output.

$$\text{PRNU (1)} = \frac{\Delta X}{\bar{X}} \times 100\ (\%)$$

$\bar{X}$: Average of total signal outputs
ΔX: The maximum deviation from $\bar{X}$

Note 4: PRNU (3) is defined as the maximum voltage with next pixel, where measured approximately 50 mV of signal output.


Note 5: V_{SAT} is defined as the minimum saturation output voltage of all effective pixels.

Note 6: Definition of SE:

$$SE = \frac{V_{SAT}}{R_G}$$


Note 7: V_{DRK} is defined as average dark signal voltage of all effective pixels.

Note 8: DSNU is defined by the difference between average value (V_{DRK}) and the maximum value of the dark voltage.

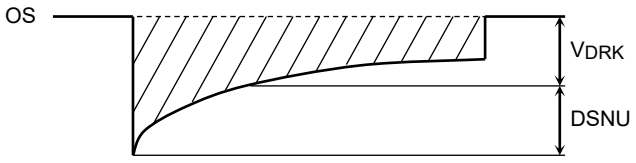


© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Note 9: DC output signal voltage is defined as follows.



Note 10: Random noise is defined as the standard deviation (sigma) of the output level difference between two adjacent effective pixels under no illumination (i.e. dark condition) calculated by the following procedure.

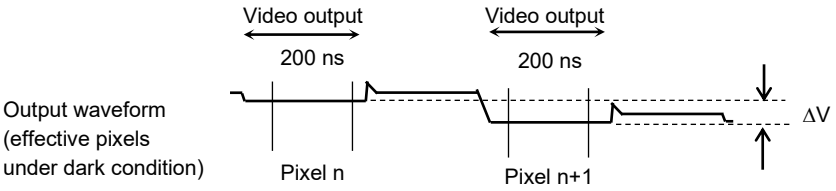

1) Two adjacent pixels (pixel n and n+1) in one reading are fixed as measurement points.
2) Each of the output levels at video output periods averaged over 200 ns period to get V(n) and V(n+1).
3) V(n+1) is subtracted from V(n) to get ΔV.
   $\Delta V = V(n) - V(n+1)$
4) The standard deviation of ΔV is calculated after procedure 2) and 3) are repeated 30 times (30 readings).
   $\overline{\Delta V} = \frac{1}{30}\sum_{i=1}^{30}|\Delta Vi|$ $\sigma = \sqrt{\frac{1}{30}\sum_{i=1}^{30}(|\Delta Vi| - \overline{\Delta V})^2}$
5) Procedure 2), 3) and 4) are repeated 10 times to get sigma value.
6) 10 sigma values are averaged.
   $\bar{\sigma} = \frac{1}{10}\sum_{j=1}^{10}\sigma j$
7) $\bar{\sigma}$ value calculated using the above procedure is observed $\sqrt{2}$ times larger than that measured relative to the ground level. So we specify the random noise as follows.
   $ND\sigma = \frac{1}{\sqrt{2}}\bar{\sigma}$

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Recommended Operating Conditions (Ta = 25°C)

For best performance, the device should be used within the Recommended Operating Conditions.

Characteristics		Symbol	Min	Typ.	Max	Unit
Clock pulse voltage	"H" level	$V_{\phi 1A}$	4.75	5.0	6.3	V
	"L" level	$V_{\phi 2A}$	0	0	0.25	
Last stage clock pulse voltage	"H" level	$V_{\phi 2B}$	4.75	5.0	6.3	V
	"L" level		0	0	0.25	
Shift pulse voltage	"H" level	V_{SH}	4.75	5.0	6.3	V
	"L" level		0	0	0.25	
Reset pulse voltage	"H" level	V_{RS}	4.75	5.0	6.3	V
	"L" level		0	0	0.25	
Power supply voltage		V_{OD}	9.5	10.0	10.5	V

Clock Characteristics (Ta = 25°C)


For best performance, the device should be used within the Recommended Operating Conditions.

Characteristics		Symbol	Min	Typ.	Max	Unit
Clock pulse frequency		f_{ϕ}	0.2	1.0	35.0	MHz
Reset pulse frequency		f_{RS}	0.2	1.0	35.0	MHz
Clock capacitance	(Note 11)	$C_{\phi 1A}$	69	87	105	pF
		$C_{\phi 2A}$	68	86	104	pF
Last stage clock capacitance	(Note 11)	$C_{\phi B}$	5	10	15	pF
Shift gate capacitance		C_{SH}	30	35	40	pF
Reset gate capacitance	(Note 11)	C_{RS}	4	9	14	pF

Note 11: V_{OD} = 10 V, Input capacitance per a pin.


© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Timing Chart

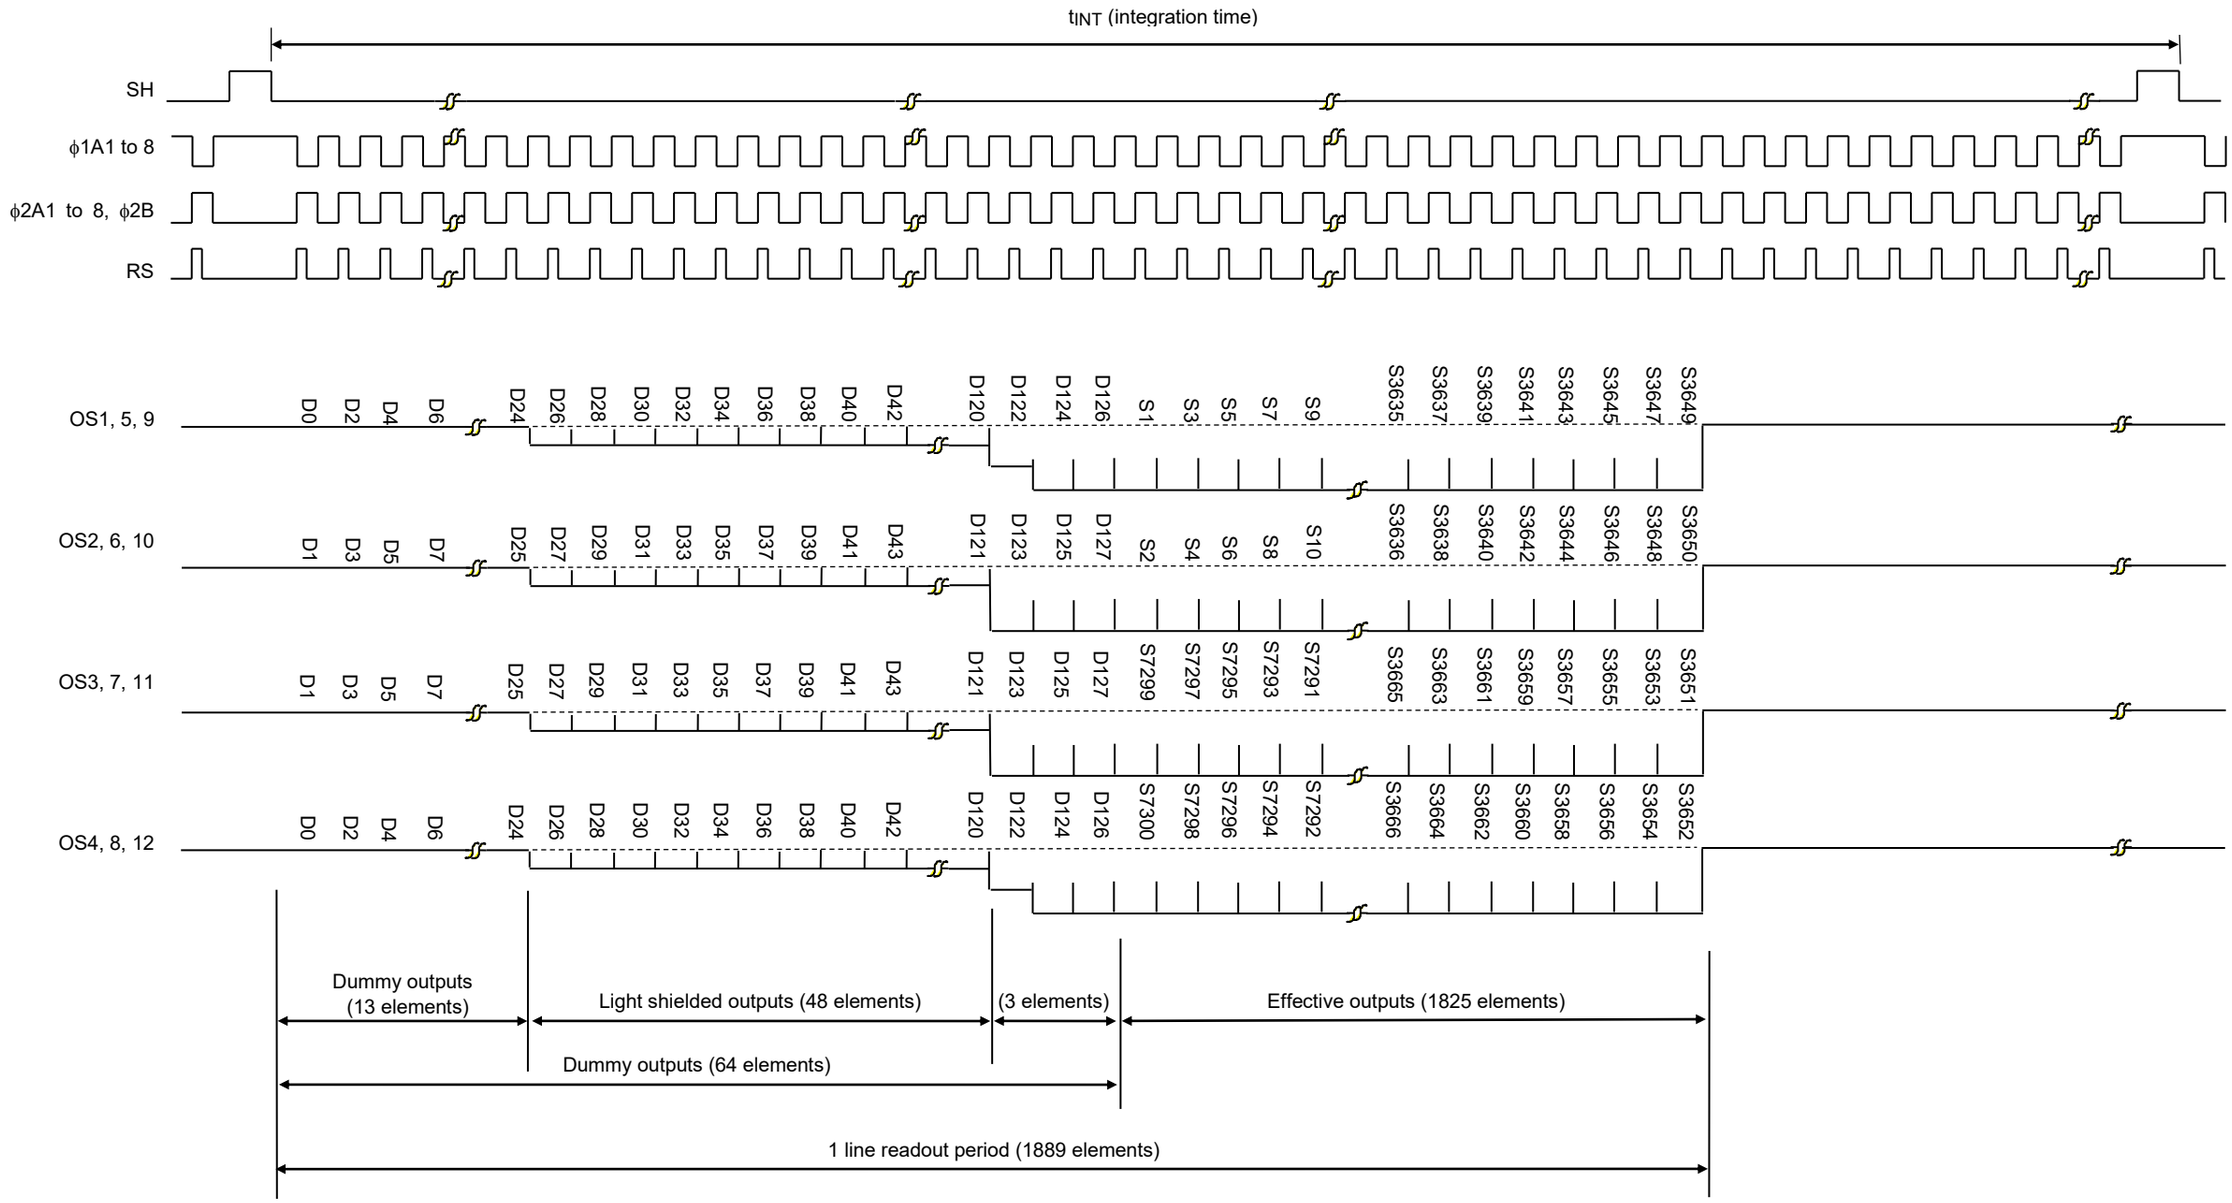


© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Timing Requirements

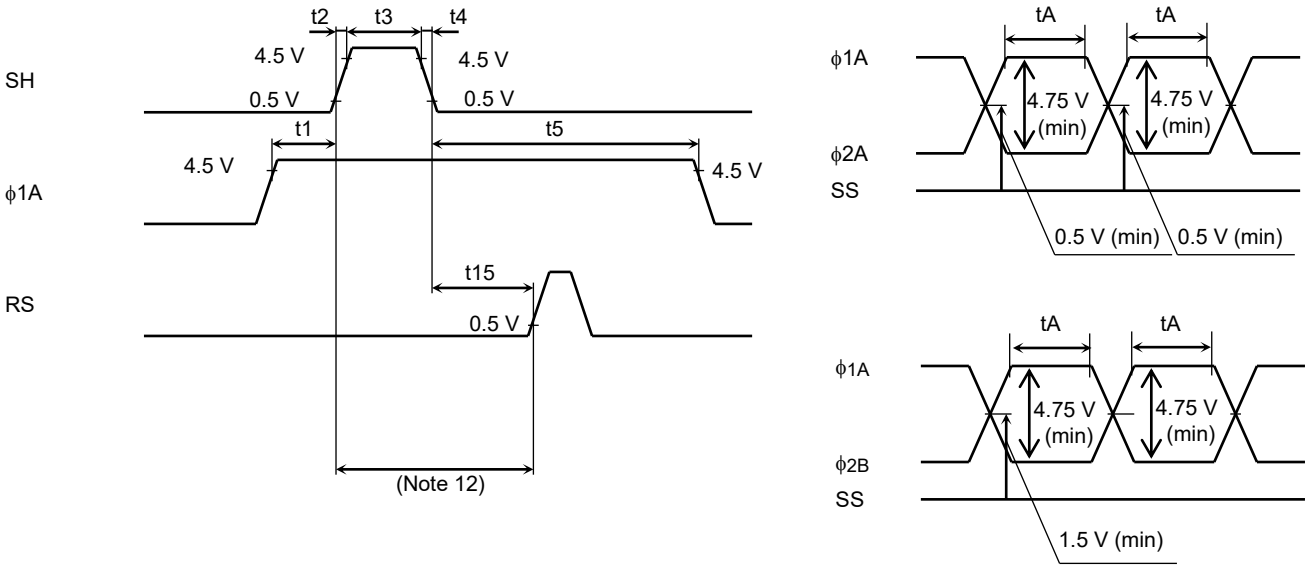

Note 12: Keep the RS and CP pins “L” level.

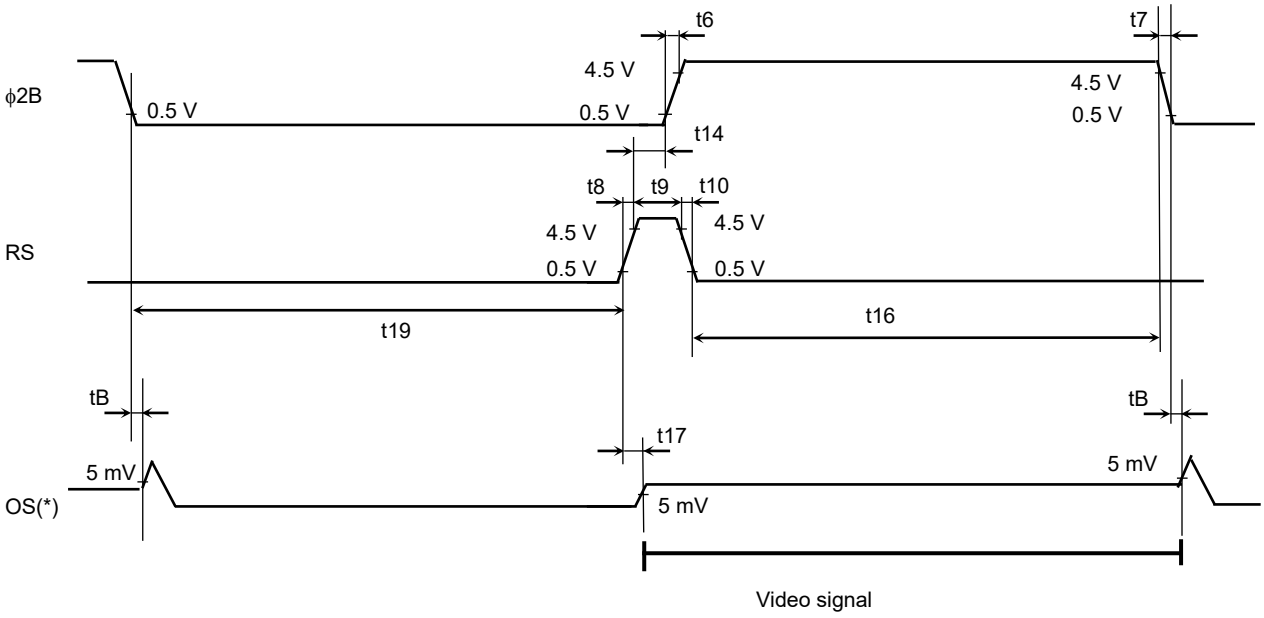

(*) 5 mV of OS is defined at 500 mV of signal output.


Characteristics	Symbol	Min	Typ. (Note 13)	Max	Unit
Pulse timing of SH and ϕ1A	t1	120	1000	—	ns
	t5	1000	1200	—	ns
SH pulse rise time, fall time	t2, t4	0	50	—	ns
SH pulse width	t3	1000	5000	—	ns
ϕ2B pulse rise time, fall time	t6, t7	0	50	—	ns
RS pulse rise time, fall time	t8, t10	0	20	—	ns
RS pulse width	t9	2	100	—	ns
Pulse timing of SH and RS	t15	800	—	—	ns
Pulse timing of ϕ2B and RS	t14	0	0	—	ns
	t16	6	100	—	ns
	t19	8	100	—	ns
Video data delay time	t17	—	5.9	—	ns
ϕ1, ϕ2 pulse width (Note 14)	tA	3	15	—	ns
ϕ2B pulse, OS timing	tB	-1.6	-0.6	0.4	ns

Note 13: Measured with f_{RS} = 1 MHz.

Note 14: Pulse width is the period when voltage difference between ϕ1A and ϕ2A, ϕ1A and ϕ2B is over 4.75 V.

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Typical Spectral Response

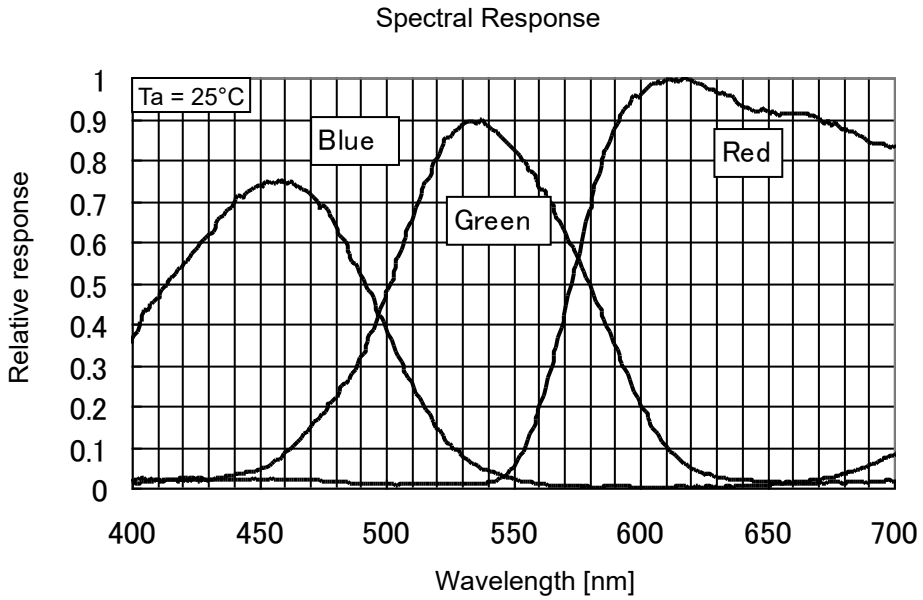

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Cautions

1. Electrostatic Breakdown

Store in shorting clip or in conductive foam to avoid electrostatic breakdown.
CCD Image Sensor is protected against static electricity, but inferior puncture mode device due to static electricity is sometimes detected. In handing the device, it is necessary to execute the following static electricity preventive measures, in order to prevent the trouble rate increase of the manufacturing system due to static electricity.

a. Prevent the generation of static electricity due to friction by making the work with bare hands or by putting on cotton gloves and non-charging working clothes.
b. Discharge the static electricity by providing earth plate or earth wire on the floor, door or stand of the work room.
c. Ground the tools such as soldering iron, radio cutting pliers of or pincer.
d. Ionized air is recommended for discharge when handling CCD image sensors.

It is not necessarily required to execute all precaution items for static electricity.
It is all right to mitigate the precautions by confirming that the trouble rate within the prescribed range.

2. Window Glass

The dust and stain on the glass window of the package degrade optical performance of CCD sensor.
Keep the glass window clean by saturating a cotton swab in alcohol and lightly wiping the surface, and allow the glass to dry, by blowing with filtered dry N_2. Care should be taken to avoid mechanical or thermal shock because the glass window is easily to damage.

3. Incident Light

CCD sensor is sensitive to infrared light. Note that infrared light component degrades resolution and PRNU of CCD sensor.

4. Mounting on a PCB

This package is sensitive to mechanical stress.
TOSHIBA recommends using IC inserters for mounting, instead of using lead forming equipment.
Since this package is not strong against mechanical stress, you should not reform the lead frame.
We recommend to use an IC-inserter when you assemble to PCB.


5. Soldering

Soldering by the solder flow method cannot be guaranteed because this method may have deleterious effects on prevention of window glass soiling and heat resistance.
Using a soldering iron, complete soldering within three seconds for lead temperatures of up to 350°C.

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

Package Dimensions WDIP68-G-400A

Unit: mm

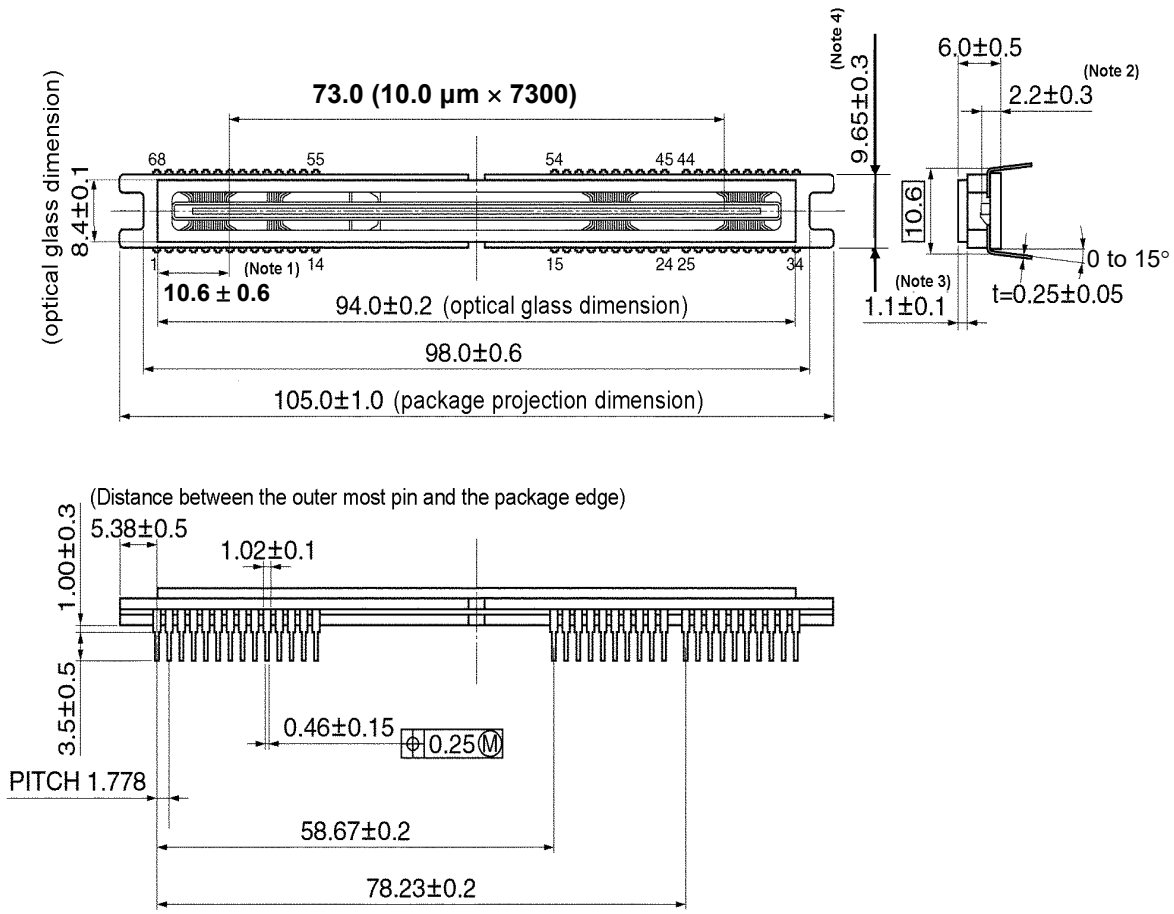

Note 1: Distance between the center of the first pin and the first pixel (S1).
Note 2: Distance between the top of the chip and bottom of the package.
Note 3: Glass thickness (n = 1.5).
Note 4: Dimensional tolerance is ± 0.3 mm for the 10 mm range from each ceramic edge, ± 0.4 mm for the 10 mm to 27 mm range and ± 0.5 mm for the inner range.

© 2019-2026
Toshiba Electronic Devices & Storage Corporation

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as “TOSHIBA”.
Hardware, software and systems described in this document are collectively referred to as “Product”.

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION

https://toshiba.semicon-storage.com/

© 2019-2026
Toshiba Electronic Devices & Storage Corporation