


Introduction of Toshiba Small Signal Schottky Barrier Diode

Toshiba offers a wide range of Schottky Barrier Diodes (SBD) mounted in small packages, including low-voltage types and low leakage current types.

Toshiba, a leading company in Diodes

Since Toshiba started mass production of diodes in 1956, it has been one of the major diode vendors who have continued to market products as a pioneer in the industry since the early days of semiconductors. We will continue to provide a wide range of highly reliable diode products based on our experience in delivering products to many customers.

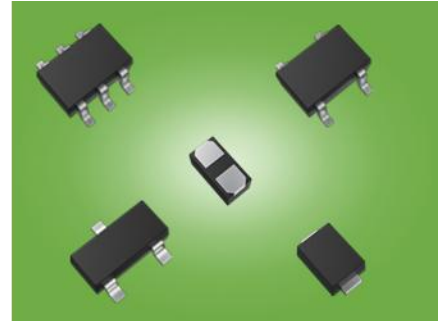


High-quality, stable production system at plants in Japan and Thailand

Our diode products are mainly surface mount type small packages. We will provide high-quality, stable production at our plants in Japan and Thailand.

Schottky barrier diode overview

A diode is a two-terminal semiconductor device with one PN junction or an alternative junction. They are broadly classified as shown in the figure below. A Schottky barrier diode is utilizing a Schottky barrier created by junction between a metal and semiconductor. Compared to PN-junction diode, this diode has a lower forward-voltage (V_F) and faster switching performance. Therefore, power supply circuits can be made more efficient and more compact, and they are widely used in IoT, communication equipment, power supplies, industrial applications, etc.

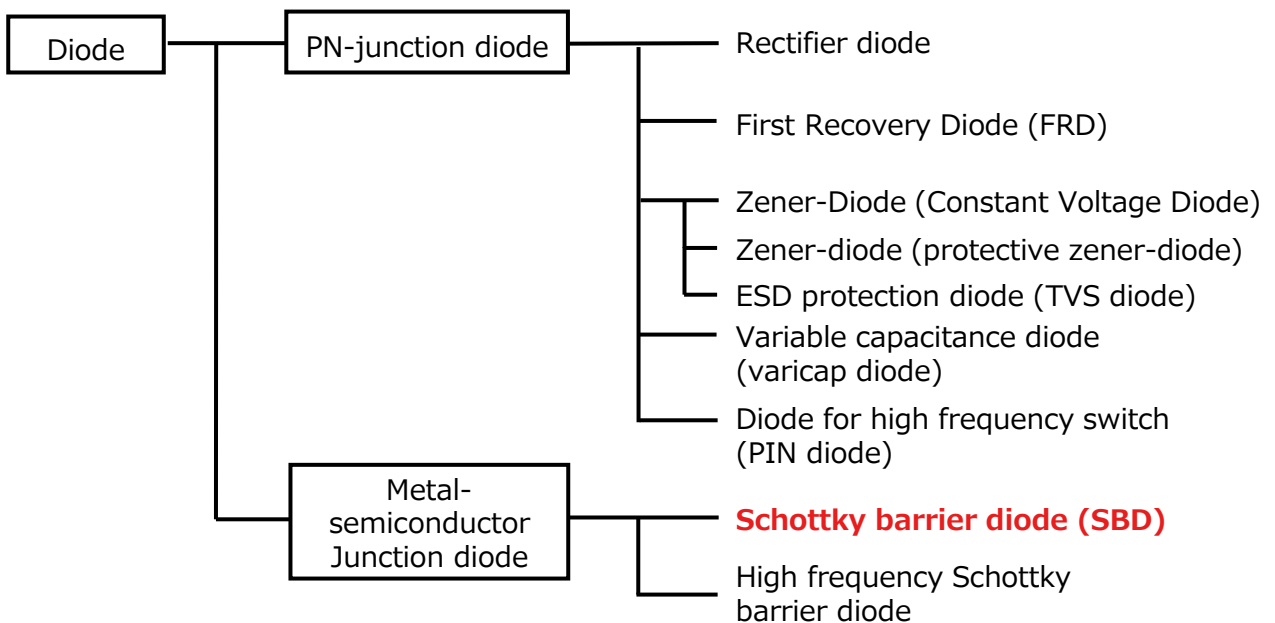


Basic Structure and Operation of Schottky Barrier Diode (SBD)

A schottky barrier diode has the same properties as PN junction diodes in that current flows (forward direction) and no current flows (reverse direction) according to the direction of the applied voltage. Therefore it is also used as rectifying devices. The electrode terminals are called the anode(A) and cathode(K), and current flows when the anode electrode has a positive voltage.


Apply voltage in reverse direction

Apply voltage in forward direction

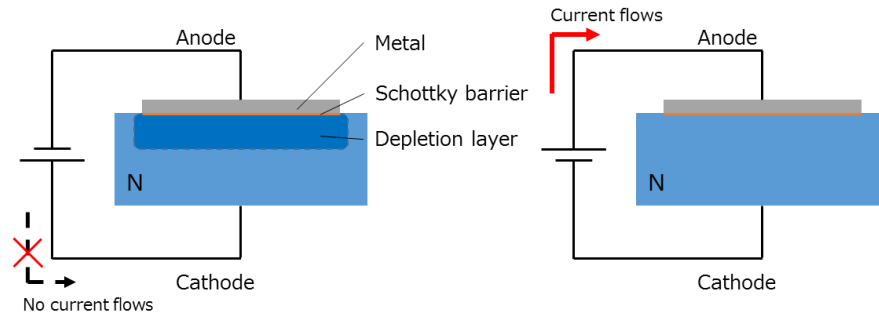

Structural drawing of SBD (example)

Anode (A) Cathode (K)



Diode symbol mark


Cathode mark



Diode Package (Example)

A depletion layer is created in a part of semiconductor by the junction (Schottky junction) of a metal and a semiconductor, enabling rectifying operations to be performed in the same way as a PN junction diode. A energy barrier called a Schottky barrier is formed at the junction, and current can be flow through by applying a voltage. However, it has the advantage of low forward voltage (V_F) and high speed switching characteristic because it allows current to flow with less energy than a PN junction diode. By utilizing such characteristics, it contribute to higher efficiency and miniaturization of power supply circuits, etc.

Since the reverse current (I_R) increases than PN junction diode, it is sensitive to heat (thermal runaway). Therefore, attention must be paid to thermal design and operating conditions.

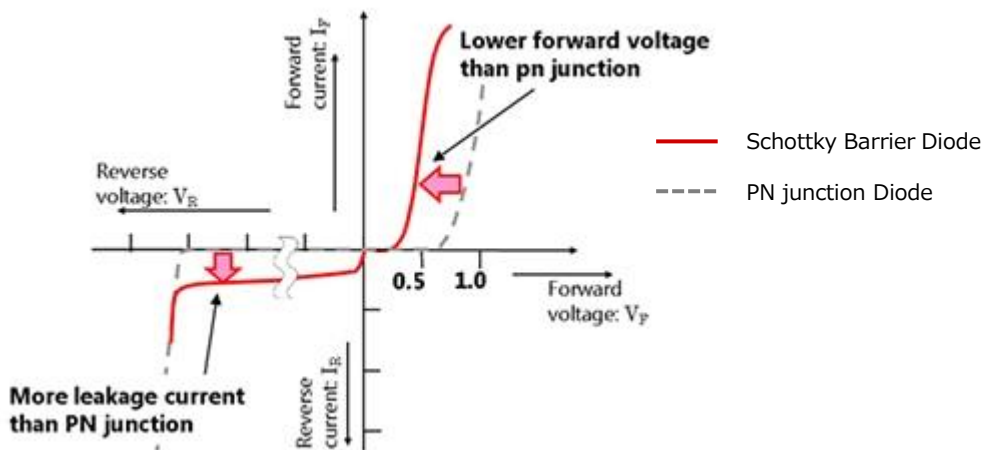

Schottky Barrier Diode Current vs. Voltage Characteristics (Example)

The characteristic of V_F vs. I_R depend on the metallic material. We offer a lineup of low V_F and low I_R products in a various packages and ratings. We would appreciate you to select the suitable product from the selection table for the Schottky barrier diodes next section.

Schottky Barrier Diode Selection Table (1)

Io > 0.5A

Io < 0.5A(1)

Io < 0.5A(2)

← **Click**

VR	Io	Part Number	Feature	VF typ (V)	IR max (μA)	Int. Circuit	Pin	Package (Toshiba)	Package dimension (mm)	Buy Online
60V	2.0A	CUHS20F60	High Voltage / High current	0.52	70	Single	2	US2H	2.5×1.4×0.6	Buy Online
		CUHS20S60	High voltage/ Low VF	0.46	650		2	US2H	2.5×1.4×0.6	Buy Online
	1.5A	CUHS15F60	High Voltage / High current	0.66	50		2	US2H	2.5×1.4×0.6	Buy Online
		CUHS15S60	High voltage/ Low VF	0.60	450		2	US2H	2.5×1.4×0.6	Buy Online
	1.0A	CUHS10F60	High voltage/ Low VF	0.56	40		2	US2H	2.5×1.4×0.6	Buy Online
40V	2.0A	CUHS20F40	High current/ Low IR	0.47	60	Single	2	US2H	2.5×1.4×0.6	Buy Online
		CUHS20S40	High current/ Low VF	0.40	300		2	US2H	2.5×1.4×0.6	Buy Online
	1.5A	CCS15F40	High current/ Low IR	0.59	25	Single	2	CST2C	1.6 x 0.8 x 0.48	Buy Online
		CCS15S40	High current/ Low VF	0.47	200		2	CST2C	1.6 x 0.8 x 0.48	Buy Online
		CUS15S40	High current/ Low VF	0.47	200		2	USC	2.5×1.25×0.9	Buy Online
		CUHS15F40	High current/ Low IR	0.57	50		2	US2H	2.5×1.4×0.6	Buy Online
		CUHS15S40	High current/ Low VF	0.45	200		2	US2H	2.5×1.4×0.6	Buy Online
	1.0A	CLS10F40	High current/ Low IR	0.52	25	Single	2	CL2E	1.0 x 0.6 x 0.28	Buy Online
		CBS10F40	High current/ Low IR	0.63	20		2	CST2B	1.2 x 0.8 x 0.38	Buy Online
		CBS10S40	High current/ Low VF	0.48	150		2	CST2B	1.2 x 0.8 x 0.38	Buy Online
		CUS10F40	High current/ Low IR	0.60	20		2	USC	2.5×1.25×0.9	Buy Online
		CUS10S40	High current/ Low VF	0.45	150		2	USC	2.5×1.25×0.9	Buy Online
	0.5A	CTS05F40	High speed switching / Low IR	0.74	15	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		CTS05S40	High speed switching	0.56	50		2	CST2	1.0 x 0.6 x 0.38	Buy Online
		CUS05F40	High speed switching / Low IR	0.74	15		2	USC	2.5×1.25×0.9	Buy Online
CUS05S40		High speed switching	0.56	50	2		USC	2.5×1.25×0.9	Buy Online	
30V	2.0A	CUHS20F30	High current/ Low IR	0.40	60	Single	2	US2H	2.5×1.4×0.6	Buy Online
		CUHS20S30	High current/ Low VF	0.34	500		2	US2H	2.5×1.4×0.6	Buy Online
	1.5A	CCS15S30	High current/ Low VF	0.39	500	Single	2	CST2C	1.6 x 0.8 x 0.48	Buy Online
		CUS15S30	High current/ Low VF	0.39	500		2	USC	2.5×1.25×0.9	Buy Online
		CUHS15F30	High current/ Low IR	0.46	50		2	US2H	2.5×1.4×0.6	Buy Online
		CUHS15S30	High current/ Low VF	0.37	500		2	US2H	2.5×1.4×0.6	Buy Online
	1.0A	CBS10S30	High current/ Low VF	0.39	500	Single	2	CST2B	1.2 x 0.8 x 0.38	Buy Online
		CUS10F30	High current/ Low VF	0.43	50		2	USC	2.5×1.25×0.9	Buy Online
		CUS10S30	High current/ Low VF	0.37	500		2	USC	2.5×1.25×0.9	Buy Online
	0.5A	CTS05S30	High speed switching	0.41	300	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		CBS05F30	High speed switching	0.38	50		2	CST2B	1.2 x 0.8 x 0.38	Buy Online
		CUS05F30	High speed switching	0.38	50		2	USC	2.5×1.25×0.9	Buy Online
CUS05S30		High speed switching	0.41	300	2		USC	2.5×1.25×0.9	Buy Online	

Schottky Barrier Diode Selection Table (2)

Io > 0.5A


Io < 0.5A(1)

Io < 0.5A(2)


← Click

VR	Io	Part Number	Feature	VF typ (V)	IR max (μA)	Int. Circuit	Pin	Package (Toshiba)	Package dimension (mm)	Buy Online
40V	0.1A	1SS417CT	High speed switching / Low IR	0.56	5	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		1SS417	High speed switching / Low IR	0.56	5		2	SOD-923	1.0 x 0.6 x 0.4	Buy Online
		CES388	High speed switching	0.54	5		2	ESC	1.6x0.8x0.6	Buy Online
		CUS357	High speed switching	0.54	5		2	USC	2.5x1.25x0.9	Buy Online
		1SS423	High speed switching	0.56	5	Single	3	SSM	1.6x1.6x0.7	Buy Online
30V	0.2A	CTS521	High speed switching / Low VF	0.45	30	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		CES521	High speed switching / Low VF	0.45	30		2	ESC	1.6x0.8x0.6	Buy Online
		CUS521	High speed switching / Low VF	0.45	30		2	USC	2.5x1.25x0.9	Buy Online
		CTS520	High speed switching	0.52	5		2	CST2	1.0 x 0.6 x 0.38	Buy Online
		CES520	Low leak current	0.52	5		2	ESC	1.6x0.8x0.6	Buy Online
		CUS520	Low leak current	0.52	5		2	USC	2.5x1.25x0.9	Buy Online
	0.1A	1SS416CT	High speed switching / Low VF	0.38	50	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		1SS416	High speed switching / Low VF	0.38	50		2	SOD-923	1.0 x 0.6 x 0.4	Buy Online
		1SS422	Low forward voltage	0.38	50	Series	3	SSM	1.6x1.6x0.7	Buy Online
		DSF01S30SL	Low forward voltage	0.41	50	Single	2	SL2	0.62 x 0.32 x 0.3	Buy Online
		DSR01S30SL	Low leak current	0.51	0.7		2	SL2	0.62 x 0.32 x 0.3	Buy Online
20V	0.3A	1SS404	High current/ Low VF	0.38	50	Single	2	USC	2.5x1.25x0.9	Buy Online
	0.2A	1SS424	High current/ Low VF	0.42	50	Single	2	ESC	1.6x0.8x0.6	Buy Online
	0.05A	1SS413CT	High speed switching / Low IR	0.5	0.5	Single	2	CST2	1.0 x 0.6 x 0.38	Buy Online
		1SS413	High speed switching / Low IR	0.5	0.5		2	SOD-923	1.0 x 0.6 x 0.4	Buy Online
		1SS405	High speed switching / Low IR	0.5	0.5		2	ESC	1.6x0.8x0.6	Buy Online
		1SS406	High speed switching / Low IR	0.5	0.5		2	USC	2.5x1.25x0.9	Buy Online
10V	0.1A	1SS389	Low forward voltage	0.35	20	Single	2	ESC	1.6x0.8x0.6	Buy Online
		1SS367	Low forward voltage	0.35	20		2	USC	2.5x1.25x0.9	Buy Online
		1SS385FV	Low forward voltage	0.35	20	K Com.	3	VESM	1.2x1.2x0.5	Buy Online
		1SS385	Low forward voltage	0.35	20	K Com.	3	SSM	1.6x1.6x0.7	Buy Online

Pin assignment:



Single



Series

Cathode common (K com.)

Schottky Barrier Diode Selection Table (3)

Io > 0.5A

Io < 0.5A(1)

Io < 0.5A(2)


Click

VR	Io	Part Number	Feature	VF typ (V)	IR max (μ A)	Int. Circuit	Pin	Package (Toshiba)	Package dimension (mm)	Buy Online
40V	0.1A	1SS322	High speed switching	0.54	5	Single	3	USM	2.0×2.1×0.9	Buy Online
		1SS393	High speed switching	0.54	5	K com.	3	USM	2.0×2.1×0.9	Buy Online
		1SS294	High speed switching	0.54	5	Single	3	S-Mini	2.9×2.5×1.1	Buy Online
		1SS392	High speed switching	0.54	5	K com.	3	S-Mini	2.9×2.5×1.1	Buy Online
		HN2S02JE	High speed switching	0.54	5	Separate	5	ESV	1.6×1.6×0.55	Buy Online
		HN2S02FU	High speed switching	0.54	5		6	US6	2.0×2.1×0.9	Buy Online
30V	0.2A	TBAT54	Low IR / Low VF	0.45	2	Single	3	SOT23	2.9×2.4×0.9	Buy Online
		TBAT54C	Low IR / Low VF	0.45	2	K com.	3	SOT23	2.9×2.4×0.9	Buy Online
		TBAT54S	Low IR / Low VF	0.45	2	Series	3	SOT23	2.9×2.4×0.9	Buy Online
		TBAT54A	Low IR / Low VF	0.45	2	A com.	3	SOT23	2.9×2.4×0.9	Buy Online
20V	0.3A	1SS401	High current/ Low VF	0.38	50	Single	3	USM	2.0×2.1×0.9	Buy Online
	0.2A	HN2S04FU	High current/ Low VF	0.36	50	Separate	6	US6	2.0×2.1×0.9	Buy Online
	0.05A	HN2S03FU	High speed switching / Low IR	0.5	0.5		6	US6	2.0×2.1×0.9	Buy Online
10V	0.1A	1SS395	Low forward voltage	0.35	20	Single	3	USM	2.0×2.1×0.9	Buy Online
		1SS378	Low forward voltage	0.35	20	K com.	3	USM	2.0×2.1×0.9	Buy Online
		1SS372	Low forward voltage	0.35	20	Series	3	USM	2.0×2.1×0.9	Buy Online
		1SS394	Low forward voltage	0.35	20	Single	3	S-Mini	2.9×2.5×1.1	Buy Online
		1SS377	Low forward voltage	0.35	20	K com.	3	S-Mini	2.9×2.5×1.1	Buy Online
		1SS374	Low forward voltage	0.35	20	Series	3	S-Mini	2.9×2.5×1.1	Buy Online
		HN2S01FU	Low forward voltage	0.35	20	Separate	6	US6	2.0×2.1×0.9	Buy Online
	HN2S01F	Low forward voltage	0.35	20	6		SM6	2.9×2.8×1.1	Buy Online	
0.05A	1SS321	Low leak current	0.63	0.5	K com.	3	S-Mini	2.9×2.5×1.1	Buy Online	


Pin assignment:




Single





Cathode common
(K com.)



Series



Anode common
(A com.)



Separate

LINK

- [Parametric search](#) [Click](#)
- [Application Notes](#) [Click](#)
- [Frequently Asked Question \(FAQ\) of Diodes](#) [Click](#)
- [Cross-reference search](#) [Click](#)

Company names, product names, and service names may be trademarks of their respective companies.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".

Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.
- PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE"). Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT. For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.