

TLP224GA-2

Applications

Mechanical relay replacements

Factory Automation (FA)

Measuring Instrument

General


The TLP224GA-2 consists of a gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in an 8-pin DIP package.

The TLP224GA-2 has a performance to protect against external surge with the current limiting function that is included in Output-MOS FET.

Features

- Normally opened (2- Form-A).
- Peak Off-State Voltage : 400 V (MIN.)
- Trigger LED Current : 3 mA (MAX.)
- On-State Current : 120 mA (MAX.)
- Limit Current : 150 mA to 300 mA (t = 5 ms)
- On-State Resistance : 35 Ω (MAX.)
- Isolation Voltage : 2500 Vrms (MIN.)
- UL recognized : UL 1577, File No.E67349
- cUL recognized : CSA Component Acceptance Service No.5A File No. E67349


Unit: mm

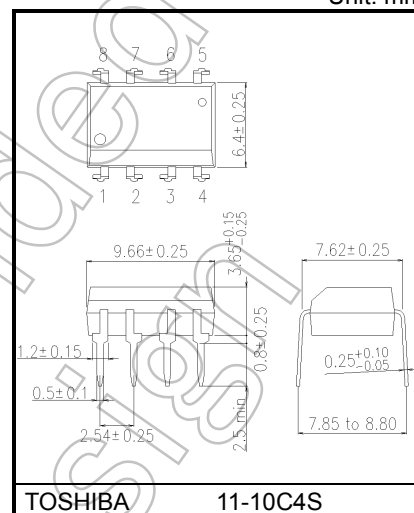

Weight: 0.54 g


Start of commercial production
1999-09

Pin Configuration (Top View)

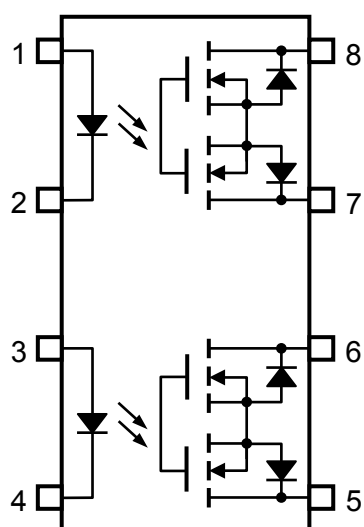

- 1, 3 : ANODE
- 2, 4 : CATHODE
- 5 : DRAIN 1
- 6 : DRAIN 2
- 7 : DRAIN 3
- 8 : DRAIN 4

Internal Circuit

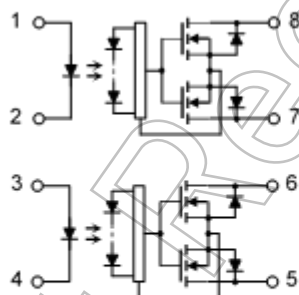

Absolute Maximum Ratings (Note) (Unless otherwise specified, Ta = 25°C)

Characteristics			Symbol	Rating	Unit
LED	Forward Current		I _F	50	mA
	Forward Current Derating (Ta ≥ 25°C)		ΔI _F /°C	−0.5	mA/°C
	Peak Forward Current (100μs pulse, 100 pps)		I _{FP}	1	A
	Reverse Voltage		V _R	5	V
	Junction Temperature		T _j	125	°C
DETECTOR	Off-State Output Terminal Voltage		V _{OFF}	400	V
	On-State Current	One Channel	I _{ON}	120	mA
		Both Channel (Note 1)			
	On-State Current Derating (Ta ≥ 25°C)	One Channel	ΔI _{ON} /°C	−1.2	mA/°C
		Both Channel (Note 1)			
	Output power dissipation		P _O	504	mW
	Output power dissipation derating (Ta ≥ 25°C)		ΔP _O /°C	−5.04	mW/°C
Junction Temperature		T _j	125	°C	
Storage Temperature Range			T _{stg}	−55~125	°C
Operating Temperature Range			T _{opr}	−40~85	°C
Lead Soldering Temperature (10 s)			T _{sol}	260	°C
Isolation Voltage (AC, 60 s, R.H. ≤ 60%) (Note 2)			BV _S	2500	Vrms

Note : Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1 : Two channels operating simultaneously.

Note 2 : Device considered a two-terminal device : LED side pins shorted together, and DETECTOR side pins shorted together.

Recommended Operating Conditions (Note)

Characteristics	Symbol	Note	Min.	Typ.	Max.	Unit
Supply Voltage	V _{DD}		—	—	320	V
Forward Current	I _F		5	7.5	25	mA
On-State Current	I _{ON}		—	—	120	mA
Operating Temperature	T _{opr}		-20	—	65	°C

Note : The recommended operating conditions are given as a design guide necessary to obtain the intended performance of the device. Each parameter is an independent value. When creating a system design using this device, the electrical characteristics specified in this data sheet should also be considered.

Individual Electrical Characteristics (Unless otherwise specified, Ta = 25°C)

Characteristics		Symbol	Note	Test Condition	Min.	Typ.	Max.	Unit
LED	Forward Voltage	V _F		I _F = 10 mA	1.0	1.15	1.3	V
	Reverse Current	I _R		V _R = 5 V	—	—	10	μA
	Capacitance	C _T		V = 0, f = 1 MHz	—	30	—	pF
DETECTOR	Off-State Current	I _{OFF}		V _{OFF} = 400 V	—	—	1	μA
	Capacitance	C _{OFF}		V = 0, f = 1 MHz	—	70	—	pF

Coupled Electrical Characteristics (Unless otherwise specified, Ta = 25°C)

Characteristics	Symbol	Note	Test Condition	Min.	Typ.	Max.	Unit
Trigger LED Current	I _{FT}		I _{ON} = 120 mA	—	1	3	mA
Return LED Current	I _{FC}		I _{OFF} = 100 μA	0.1	—	—	mA
Load Current Limiting	I _{LIM}		I _F = 5 mA, V _{DD} = 5 V, t = 5ms	150	—	300	mA
On-State Resistance	R _{ON}		I _{ON} = 120 mA, I _F = 5 mA	—	17	35	Ω

Isolation Characteristics (Unless otherwise specified, Ta = 25°C)


Characteristics	Symbol	Note	Test Condition	Min.	Typ.	Max.	Unit
Capacitance Input to Output	C _S	(Note 1)	V _S = 0 V, f = 1 MHz	—	0.8	—	pF
Isolation Resistance	R _S	(Note 1)	V _S = 500 V, R.H. ≤ 60%	5 × 10 ¹⁰	10 ¹⁴	—	Ω
Isolation Voltage	BV _S	(Note 1)	AC, 60 s	2500	—	—	Vrms

Note 1 : Device considered a two-terminal device : LED side pins shorted together, and DETECTOR side pins shorted together.







Switching Characteristics (Unless otherwise specified, Ta = 25°C)




Characteristics	Symbol	Note	Test Condition	Min.	Typ.	Max.	Unit
Turn-on Time	t _{ON}	(Note 1)	R _L = 200 Ω V _{DD} = 20 V, I _F = 5 mA	—	0.3	1	ms
Turn-off Time	t _{OFF}	(Note 1)		—	0.1	1	

Note 1 : Switching Time Test Circuit

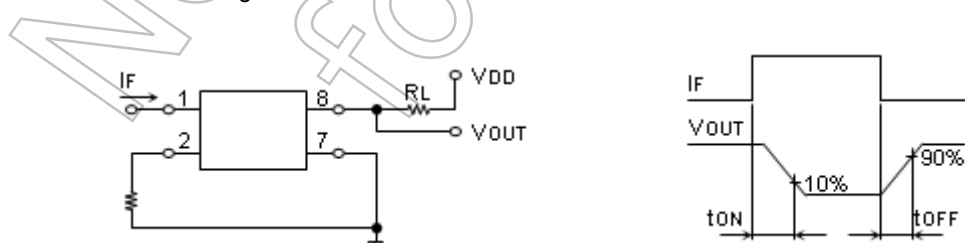

Characteristics Curves (Note)

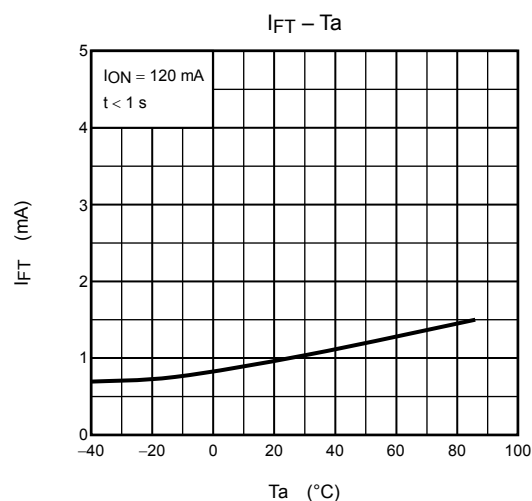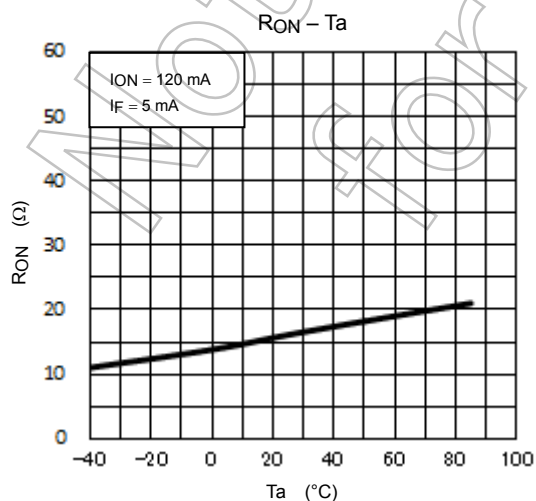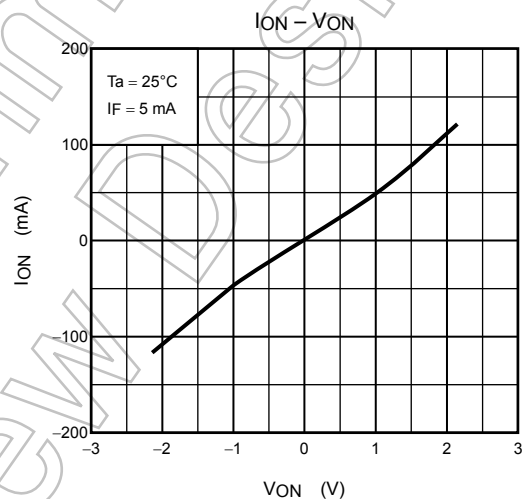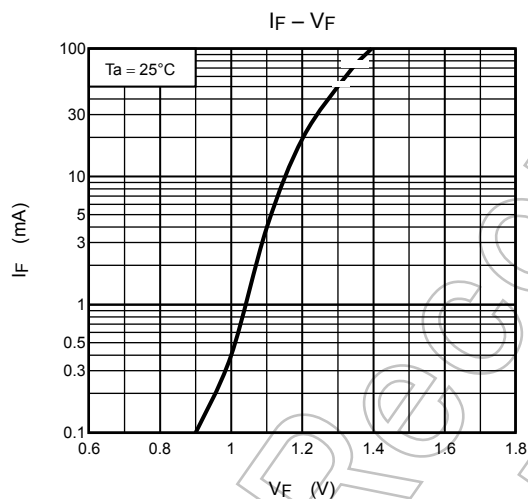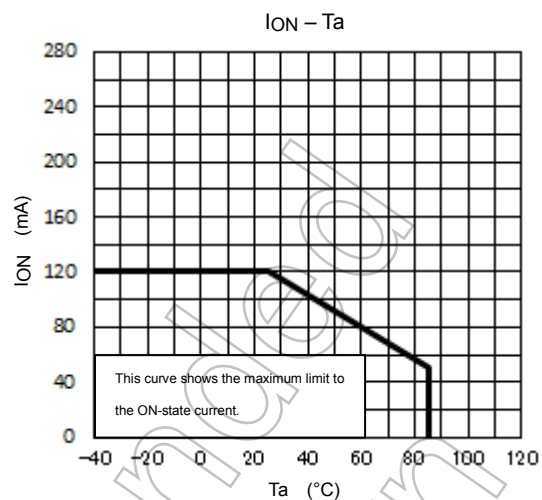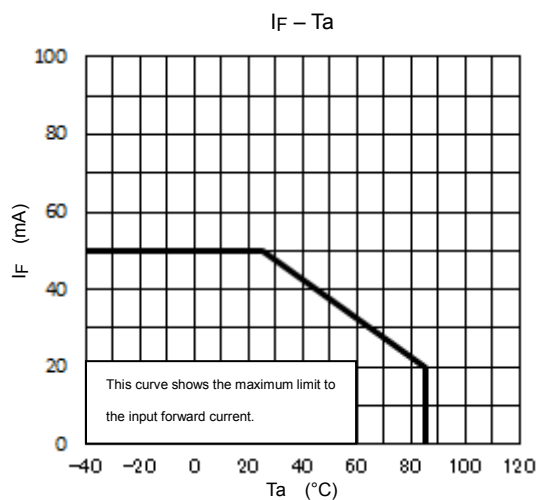

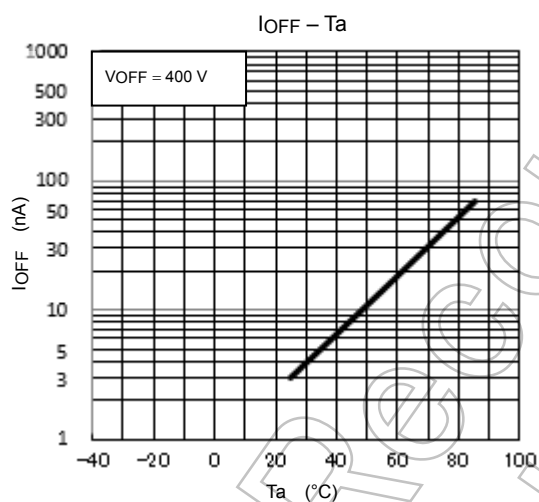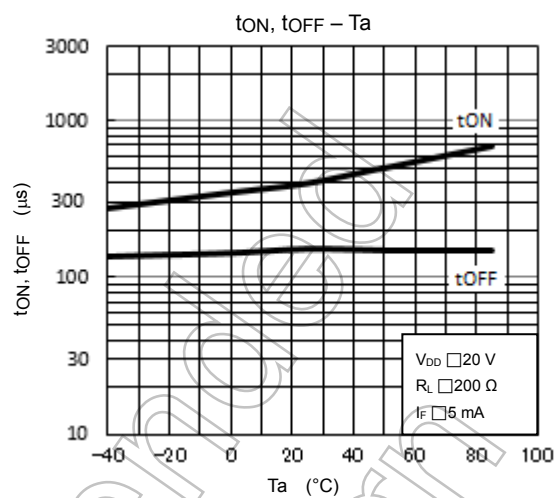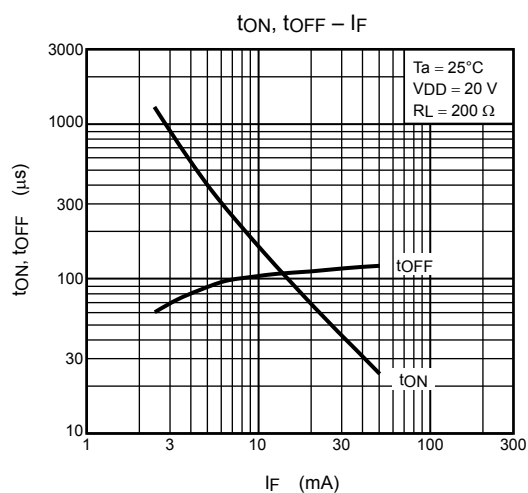

Note : The above characteristics curves are presented for reference only and not guaranteed by protection test, unless otherwise noted.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

TOSHIBA ELECTRONIC DEVICES & STORAGE CORPORATION

<https://toshiba.semicon-storage.com/>