

32-bit RISC Microcontroller

TXZ+ Family

TMPM4G Group(1)

Reference Manual

Input/Output Ports
(PORT-M4G(1))

Revision 1.1

2024-05

Toshiba Electronic Devices & Storage Corporation

Contents

Preface	5
Related document.....	5
Conventions	6
Terms and Abbreviations	8
1. Outlines	9
2. Function	10
2.1. Clock Supply	10
3. Signal Connection List	11
4. Registers	30
4.1. List of Register	31
4.2. List of Port Functions and Settings	34
4.2.1. Setting of using the alternated pin	34
4.2.2. PORT A	35
4.2.3. PORT B	37
4.2.4. PORT C	39
4.2.5. PORT D	40
4.2.6. PORT E	42
4.2.7. PORT F	44
4.2.8. PORT G	45
4.2.9. PORT H	47
4.2.10. PORT J	48
4.2.11. PORT K	49
4.2.12. PORT L	51
4.2.13. PORT M	52
4.2.14. PORT N	54
4.2.15. PORT P	55
4.2.16. PORT R	57
4.2.17. PORT T	58
4.2.18. PORT U	59
4.2.19. PORT V	61
4.2.20. PORT W	63
4.2.21. PORT Y	64
5. Block Diagrams of Ports	65
5.1. Type FTU1	66
5.2. Type FTU2	67
5.3. Type FTU2b	68
5.4. Type FTU3	69
5.5. Type FTU4	70
5.6. Type FTU5	71
5.7. Type FTU6	72
5.8. Type FTU10	73

5.9. Type FTU10b	74
5.10. Type FTU13	75
5.11. Type FTU14	76
5.12. Type FTU15	77
6. Precaution	78
6.1. Pin Status During Reset.....	78
6.2. Unused Pins.....	78
6.3. Important Points of Using Debug Interface Pins Used as General-purpose Ports.....	78
7. Revision History	79
RESTRICTIONS ON PRODUCT USE.....	80

List of Figures

Figure 5.1 Port Type FTU1	66
Figure 5.2 Port Type FTU2	67
Figure 5.3 Port Type FTU2b	68
Figure 5.4 Port Type FTU3	69
Figure 5.5 Port Type FTU4	70
Figure 5.6 Port Type FTU5	71
Figure 5.7 Port Type FTU6	72
Figure 5.8 Port Type FTU10	73
Figure 5.9 Port Type FTU10b	74
Figure 5.10 Port Type FTU13	75
Figure 5.11 Port Type FTU14	76
Figure 5.12 Port Type FTU15	77

List of Tables

Table 1.1	Features	9
Table 3.1	Signal Connection List (1/19).....	11
Table 3.2	Signal Connection List (2/19).....	12
Table 3.3	Signal Connection List (3/19).....	13
Table 3.4	Signal Connection List (4/19).....	14
Table 3.5	Signal Connection List (5/19).....	15
Table 3.6	Signal Connection List (6/19).....	16
Table 3.7	Signal Connection List (7/19).....	17
Table 3.8	Signal Connection List (8/19).....	18
Table 3.9	Signal Connection List (9/19).....	19
Table 3.10	Signal Connection List (10/19).....	20
Table 3.11	Signal Connection List (11/19).....	21
Table 3.12	Signal Connection List (12/19).....	22
Table 3.13	Signal Connection List (13/19).....	23
Table 3.14	Signal Connection List (14/19).....	24
Table 3.15	Signal Connection List (15/19).....	25
Table 3.16	Signal Connection List (16/19).....	26
Table 3.17	Signal Connection List (17/19).....	27
Table 3.18	Signal Connection List (18/19).....	28
Table 3.19	Signal Connection List (19/19).....	29
Table 4.1	Ports Base Address	31
Table 4.2	Register List	32
Table 4.3	Port A Register Settings.....	35
Table 4.4	Port B Register Settings.....	37
Table 4.5	Port C Register Settings	39
Table 4.6	Port D Register Settings	40
Table 4.7	Port E Register Settings.....	42
Table 4.8	Port F Register Settings.....	44
Table 4.9	Port G Register Settings	45
Table 4.10	Port H Register Settings	47
Table 4.11	Port J Register Settings	48
Table 4.12	Port K Register Settings.....	49
Table 4.13	Port L Register Settings	51
Table 4.14	Port M Register Settings.....	52
Table 4.15	Port N Register Settings	54
Table 4.16	Port P Register Settings.....	55
Table 4.17	Port R Register Settings	57
Table 4.18	Port T Register Settings.....	58
Table 4.19	Port U Register Settings	59
Table 4.20	Port V Register Settings.....	61
Table 4.21	Port W Register Settings.....	63
Table 4.22	Port Y Register Settings.....	64
Table 7.1	Revision History	79

Preface

Related Document

Document name
Product Information
Clock Control and Operation Mode
Exception
Flash Memory
8-bit Digital to Analog Converter
I ² C Interface
I ² C Interface Version A
I ² S Interface
Serial Peripheral Interface
Synchronous Serial Interface
Multi-function DMA Controller
High-speed DMA Controller
12-bit Analog to Digital Converter
32-bit Timer Event Counter
Asynchronous Serial Communication Circuit
Full Asynchronous Serial Communication Circuit
Serial Memory Interface
Real Time Clock
Remote Control Signal preprocessor
Consumer Electronics Control
Advanced Programmable Motor Control Circuit
Debug Interface
Boundary Scan
External Bus Interface
Non-break Debug Interface

Conventions

- Numeric formats follow the rules as shown below:

Hexadecimal:	0xABC	
Decimal:	123 or 0d123	- Only when it needs to be explicitly shown that they are decimal numbers.
Binary:	0b111	- It is possible to omit the "0b" when the number of bits can be distinctly understood from a sentence.
- "_N" is added to the end of signal names to indicate low active signals.
- It is called "assert" that a signal moves to its active level, "deassert" to its inactive level.
- When two or more signal names are referred, they are described like as [m:n].
 Example: S[3:0] shows four signal names S3, S2, S1 and S0 together.
- The characters surrounded by [] defines the register.
 Example: [ABCD]
- "N" substitutes suffix number of two or more same kind of registers, fields, and bit names.
 Example: [XYZ1], [XYZ2], [XYZ3] → [XYZn]
- "x" substitutes suffix number or character of units and channels in the register list.
- In case of unit, "x" means A, B, and C, ...
 Example: [ADACR0], [ADBCR0], [ADCCR0] → [ADxCR0]
- In case of channel, "x" means 0, 1, and 2, ...
 Example: [T32A0RUNA], [T32A1RUNA], [T32A2RUNA] → [T32AxRUNA]
- The bit range of a register is written like as [m: n].
 Example: Bit[3: 0] expresses the range of bit 3 to 0.
- The configuration value of a register is expressed by either the hexadecimal number or the binary number.
 Example: [ABCD]<EFG> = 0x01 (hexadecimal), [XYZn]<VW> = 1 (binary)
- Word and byte represent the following bit length.

Byte:	8 bits
Half word:	16 bits
Word:	32 bits
Double word:	64 bits
- Properties of each bit in a register are expressed as follows:

R:	Read only
W:	Write only
R/W:	Read and write are possible.
- Unless otherwise specified, register access supports only word access.
- The register defined as "Reserved" must not be rewritten. Moreover, do not use the read value.
- The value read from the bit having default value of "-" is unknown.
- When a register containing both of writable bits and read-only bits is written, read-only bits should be written with their default value, In the cases that default is "-", follow the definition of each register.
- Reserved bits of the write-only register should be written with their default value. In the cases that default is "-", follow the definition of each register.
- Do not use read-modified-write processing to the register of a definition which is different by writing and read out.

All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Terms and Abbreviations

Some of abbreviations used in this document are as follows:

CEC	Consumer Electronics Control
DMA	Direct Memory Access
I2C	Inter-Integrated Circuit
I2S	Inter-IC Sound
JTAG	Joint Test Action Group
NBDIF	Non-break Debug Interface
PORF	Power-on Reset Circuit for Flash and Debug
SW	Serial Wire

1. Outlines

It is described about the register and setting of port. A list of the functions is indicated below.

Table 1.1 Features

Function classification	Function	Description
Port	-	Programmable pull-up /Programmable pull-down /Open-drain output are possible.
Peripheral Function pins	Interrupt Control	External Interrupt pin Interrupt pin has a noise filter (Filter width 30 ns Typ.).
	32-bit Timer Event Counter	Input capture input pin, timer output pin
	Serial Peripheral Interface	Chip select input 1 pin, Chip select output 4 pins, Data input pin, Data output pin, Clock input/output pin
	Synchronous Serial Interface	Data input pin, Data output pin, Frame synchronous input/output pins, Clock input/output pins
	Asynchronous Serial Communication Circuit	Data input pin, Data output pin, Handshake function pins
	Full Universal Asynchronous Receiver Transmitter	Data input pin, Data output pin, Handshake function pins, IrDA1.0 data input/output pin
	I ² C Interface	Data input/output pin, Clock input/output pin
	I ² C Interface Version A	Data input/output pin, Clock input/output pin
	I ² S Interface	Data input pin, Data output pin, LR clock input/output pin, Bit clock input/output pin, Master clock input/output pin
	Serial Memory Interface	Chip select input/output pin, Data input/output pin, Clock input/output pin
	Multi-Function DMA Controller	MDMA Request input pin
	High-speed DMA Controller	HDMA Request input pin
	Interval Sensor Detection	Data input pin, Data output pin
	Consumer Electronics Control	Data input/output pin
	External Bus Interface	Address bus output pin, Data bus input/output pin, Read strobe output pin, Write strobe output pin, Chip Select output pin, Byte Enable output pin, Address Latch Enable output pin, Wait input pin, Clock output pin
	Advanced Programmable Motor Control Circuit	X/Y/Z phase output pins, U/V/W phase output pins, EMG detection input pin, OVV detection input pin
	Remote Control Signal preprocessor	Data input pin
	12-bit Analog to Digital Convertor	Analog input pin, AD Trigger input pin
	8-bit Digital to Analog Convertor	DAC output pin
	Real Time Clock	1 Hz clock output pin, Alarm output pin
Trigger Input	TRGINx pin	
Debug pins	JTAG	Test select input pin, Serial clock input pin, Serial data output pin, Serial data input pin, Test reset pin
	SW	Serial wire data input/output pin, Serial wire clock input pin, Serial wire viewer output pin
	Trace	Trace clock output pin, Trace data output 4pins
	NBDIF	NBDIF synchronous input pin, NBDIF clock input pin, NBDIF data output 4pins
Control pins	High-speed Resonator	High-speed resonator connection pin, External High-speed clock input
	Low-speed Resonator	Low-speed resonator connection pin, External Low-speed clock input
	BOOT Mode Control	BOOT mode control pin

2. Function

2.1. Clock Supply

When PORT is used, the corresponding clock enable bits should be set to "1" (Clock supply) in fsys supply stop register A (*[CGFSYSENA]* and *[CGFSYSMENA]*), fsys supply stop register B (*[CGFSYSENB]* and *[CGFSYSMENB]*), fsys supply stop register C (*[CGFSYSMENC]*), and fc supply stop register (*[CGFCEN]*).

The corresponding registers and the bit locations depend on a product. Some products do not have all registers. For the details, refer to reference manual "Clock Control and Operation Mode".

3. Signal Connection List

The function pins are sorted by the signal name of the block diagram which is described in each reference manual in this table. Register setting of the peripheral function is explained in the order of port, so please use for a reverse lookup of port name.

The numerical value shows the pin number.

Table 3.1 Signal Connection List (1/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Asynchronous Serial Communication Circuit	UT0RXD	PE2	60	52	39	T5	P5
		PH4	89	73	51	R16	N14
		PH5	88	72	50	T15	P13
	UT0TXDA	PE3	61	53	40	T6	N6
		PH5	88	72	50	T15	P13
		PH4	89	73	51	R16	N14
	UT0CTS_N	PE1	59	51	38	R5	N5
		PH7	86	70	48	R14	N12
		PH6	87	71	49	R15	P12
	UT0RTS_N	PE0	58	50	37	R4	N4
		PH6	87	71	49	R15	P12
		PH7	86	70	48	R14	N12
	UT1RXD	PH0	93	77	55	N16	L11
		PH1	92	76	54	N15	M13
		PV4	81	65	-	R12	N10
	UT1TXDA	PH1	92	76	54	N15	M13
		PH0	93	77	55	N16	L11
		PV5	80	64	-	T12	P9
	UT1CTS_N	PH3	90	74	52	P15	N13
		PH2	91	75	53	P16	M14
		PV6	79	63	-	T11	N9
	UT1RTS_N	PH2	91	75	53	P16	M14
		PH3	90	74	52	P15	N13
		PV7	78	62	-	R11	L9
	UT2RXD	PG0	129	105	72	D15	D13
		PG1	130	106	73	C16	C14
	UT2TXDA	PG1	130	106	73	C16	C14
		PG0	129	105	72	D15	D13
	UT2CTS_N	PG3	132	108	75	B16	B14
		PG2	131	107	74	C15	C13
UT2RTS_N	PG2	131	107	74	C15	C13	
	PG3	132	108	75	B16	B14	

Table 3.2 Signal Connection List (2/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Asynchronous Serial Communication Circuit	UT3RXD	PU6	40	-	-	L4	-
		PV0	115	97	-	F12	F10
		PV1	114	96	-	G13	F11
	UT3TXDA	PU7	41	-	-	M4	-
		PV1	114	96	-	G13	F11
		PV0	115	97	-	F12	F10
	UT3CTS_N	PU5	39	-	-	L5	-
		PV3	112	94	-	H13	G10
		PV2	113	95	-	G12	G11
	UT3RTS_N	PU4	38	-	-	K5	-
		PV2	113	95	-	G12	G11
		PV3	112	94	-	H13	G10
	UT4RXD	PM0	124	102	-	E16	D14
		PM1	123	101	-	F15	E13
		PU1	35	-	-	J4	-
	UT4TXDA	PM1	123	101	-	F15	E13
		PM0	124	102	-	E16	D14
		PU0	34	-	-	H4	-
	UT4CTS_N	PM3	121	99	-	E13	F13
		PM2	122	100	-	F16	E14
		PU2	36	-	-	J5	-
	UT4RTS_N	PM2	122	100	-	F16	E14
		PM3	121	99	-	E13	F13
		PU3	37	-	-	K4	-
	UT5RXD	PJ0	168	-	-	B5	-
		PJ1	167	-	-	B6	-
	UT5TXDA	PJ1	167	-	-	B6	-
		PJ0	168	-	-	B5	-
	UT5CTS_N	PJ3	165	-	-	D7	-
		PJ2	166	-	-	D6	-
UT5RTS_N	PJ2	166	-	-	D6	-	
	PJ3	165	-	-	D7	-	

Table 3.3 Signal Connection List (3/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Full Asynchronous Serial Communication Circuit	FUT0RXD	PG5	96	80	58	M13	K11
		PJ5	68	-	-	R9	-
	FUT0TXD	PG4	97	81	59	L12	K13
		PJ4	69	-	-	T9	-
	FUT0CTS_N	PG7	94	78	56	M15	L13
	FUT0RTS_N	PG6	95	79	57	M16	L14
	FUT0IROUT	PG4	97	81	59	L12	K13
	FUT0IRIN	PG5	96	80	58	M13	K11
	FUT1RXD	PJ7	66	-	-	N9	-
		PM6	83	67	-	R13	N11
	FUT1TXD	PJ6	67	-	-	R8	-
		PM7	82	66	-	T13	P10
	FUT1CTS_N	PM4	85	69	-	N12	L10
	FUT1RTS_N	PM5	84	68	-	T14	P11
	FUT1IROUT	PM7	82	66	-	T13	P10
FUT1IRIN	PM6	83	67	-	R13	N11	
I ² C Interface (I2C, EI2C)	I2C0SDA EI2C0SDA	PG2	131	107	74	C15	C13
		PG3	132	108	75	B16	B14
	I2C1SDA EI2C1SDA	PF2	174	142	99	B4	B4
		PF3	175	143	100	A3	A3
	I2C2SDA EI2C2SDA	PG4	97	81	59	L12	K13
		PV5	80	64	-	T12	P9
	I2C2SCL EI2C2SCL	PG5	96	80	58	M13	K11
		PV4	81	65	-	R12	N10
	I2C3SDA EI2C3SDA	PJ6	67	-	-	R8	-
		PM0	124	102	-	E16	D14
	I2C3SCL EI2C3SCL	PJ7	66	-	-	N9	-
		PM1	123	101	-	F15	E13
	I2C4SDA EI2C4SDA	PJ3	165	-	-	D7	-
		PM6	83	67	-	R13	N11
I2C4SCL EI2C4SCL	PJ2	166	-	-	D6	-	
	PM7	82	66	-	T13	P10	

Table 3.4 Signal Connection List (4/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Interval Sensor Detection Circuit	ISDAIN0	PE4	62	54	41	R6	P6
	ISDAIN1	PE5	63	55	42	R7	P7
	ISDAIN2	PE6	64	56	43	T7	N7
	ISDAIN3	PE7	65	57	44	T8	N8
	ISDAOUT	PK0	111	93	71	H12	H10
	ISDBIN0	PV0	115	97	-	F12	F10
	ISDBIN1	PV1	114	96	-	G13	F11
	ISDBIN2	PV2	113	95	-	G12	G11
	ISDBIN3	PV3	112	94	-	H13	G10
	ISDBOUT	PK1	110	92	-	J12	H11
	ISDCIN0	PW4	120	-	-	G15	-
	ISDCIN1	PW5	119	-	-	G16	-
	ISDCIN2	PW6	118	-	-	H15	-
	ISDCIN3	PW7	117	-	-	H16	-
	ISDCOUT	PY4	30	-	-	M2	-
Serial Peripheral Interface	TSPI0CSIN	PA0	29	29	20	L1	J4
	TSPI0CS0	PA0	29	29	20	L1	J4
	TSPI0CS1	PA4	25	25	16	J1	H2
	TSPI0CS2	PA5	24	24	15	J2	G1
	TSPI0CS3	PA6	23	23	14	H1	G2
	TSPI0RXD	PA2	27	27	18	K1	J2
	TSPI0TXD	PA3	26	26	17	K2	H1
	TSPI0SCK	PA1	28	28	19	L2	J1
	TSPI1CSIN	PL0	103	85	63	L13	J11
	TSPI1CS0	PL0	103	85	63	L13	J11
	TSPI1CS1	PK4	107	89	67	J15	G14
	TSPI1CS2	PK5	106	88	66	K15	H13
	TSPI1CS3	PK6	105	87	65	J16	H14
	TSPI1RXD	PL2	101	83	61	L15	J13
	TSPI1TXD	PL3	100	82	60	L16	K14
	TSPI1SCK	PL1	102	84	62	K16	J14
	TSPI2CSIN	PA7	22	22	13	H2	J5
		PF7	3	3	2	B1	B1
	TSPI2CS0	PF7	3	3	2	B1	B1
		PA7	22	22	13	H2	J5
	TSPI2CS1	PA3	26	26	17	K2	H1
	TSPI2RXD	PA5	24	24	15	J2	G1
	TSPI2TXD	PA4	25	25	16	J1	H2
	TSPI2SCK	PA6	23	23	14	H1	G2

Table 3.5 Signal Connection List (5/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Serial Peripheral Interface	TSPI3CSIN	PK7	104	86	64	K12	J10
		PK1	110	92	70	J12	H11
	TSPI3CS0	PK1	110	92	70	J12	H11
		PK7	104	86	64	K12	J10
	TSPI3CS1	PL3	100	82	60	L16	K14
	TSPI3RXD	PK5	106	88	66	K15	H13
	TSPI3TXD	PK4	107	89	67	J15	G14
	TSPI3SCK	PK6	105	87	65	J16	H14
	TSPI4CSIN	PD0	48	40	29	N5	L4
	TSPI4CS0	PD0	48	40	29	N5	L4
	TSPI4RXD	PD2	50	42	31	N6	K6
	TSPI4TXD	PD3	51	43	32	M7	L6
	TSPI4SCK	PD1	49	41	30	M6	L5
	TSPI5CSIN	PV7	78	62	-	R11	L9
	TSPI5CS0	PV7	78	62	-	R11	L9
	TSPI5RXD	PV4	81	65	-	R12	N10
	TSPI5TXD	PV5	80	64	-	T12	P9
	TSPI5SCK	PV6	79	63	-	T11	N9
	TSPI6CSIN	PM3	121	99	-	E13	F13
	TSPI6CS0	PM3	121	99	-	E13	F13
	TSPI6RXD	PM1	123	101	-	F15	E13
	TSPI6TXD	PM0	124	102	-	E16	D14
	TSPI6SCK	PM2	122	100	-	F16	E14
	TSPI7CSIN	PM4	85	69	-	N12	L10
	TSPI7CS0	PM4	85	69	-	N12	L10
	TSPI7RXD	PM6	83	67	-	R13	N11
	TSPI7TXD	PM7	82	66	-	T13	P10
	TSPI7SCK	PM5	84	68	-	T14	P11
	TSPI8CSIN	PW0	77	-	-	M11	-
	TSPI8CS0	PW0	77	-	-	M11	-
	TSPI8RXD	PW2	75	-	-	M10	-
	TSPI8TXD	PW3	74	-	-	N10	-
TSPI8SCK	PW1	76	-	-	N11	-	

Table 3.6 Signal Connection List (6/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Synchronous Serial Interface	TSSI0TCK	PD2	50	42	31	N6	K6
	TSSI0TFS	PD3	51	43	32	M7	L6
	TSSI0TXD	PD4	52	44	33	N7	L7
	TSSI0RCK	PD7	55	47	36	M9	L8
	TSSI0RFS	PD6	54	46	35	N8	K8
	TSSI0RXD	PD5	53	45	34	M8	K7
	TSSI1TCK	PU2	36	-	-	J5	-
	TSSI1TFS	PU3	37	-	-	K4	-
	TSSI1TXD	PU4	38	-	-	K5	-
	TSSI1RCK	PU7	41	-	-	M4	-
	TSSI1RFS	PU6	40	-	-	L4	-
	TSSI1RXD	PU5	39	-	-	L5	-
Serial Memory Interface	SMI0CS1_N	PK0	111	93	71	H12	H10
	SMI0D0	PK2	109	91	69	J13	F14
	SMI0D1	PK3	108	90	68	K13	G13
	SMI0D2	PK4	107	89	67	J15	G14
	SMI0D3	PK5	106	88	66	K15	H13
	SMI0D4	PL0	103	85	63	L13	J11
	SMI0D5	PL1	102	84	62	K16	J14
	SMI0D6	PL2	101	83	61	L15	J13
	SMI0D7	PL3	100	82	60	L16	K14
	SMI0CLK	PK6	105	87	65	J16	H14
	SMI0CS0_N	PK7	104	86	64	K12	J10

Table 3.7 Signal Connection List (7/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
I ² S Interface	I2S0MCLK	PB0	21	21	12	G1	H4
	I2S0LRCK	PB4	17	17	8	E1	E1
		PD4	52	44	33	N7	L7
	I2S0BCK	PB5	16	16	7	E2	E2
		PD5	53	45	34	M8	K7
	I2S0DO	PB7	14	14	5	G5	G5
		PD7	55	47	36	M9	L8
	I2S0DI	PB6	15	15	6	G4	G4
		PD6	54	46	35	N8	K8
	I2S1MCLK	PG6	95	79	57	M16	L14
	I2S1LRCK	PC3	8	8	-	D2	D2
		PE7	65	57	44	T8	N8
	I2S1BCK	PC2	9	9	-	D1	D1
		PE6	64	56	43	T7	N7
	I2S1DO	PC0	11	11	-	F4	F4
		PE4	62	54	41	R6	P6
	I2S1DI	PC1	10	10	-	F5	F5
PE5		63	55	42	R7	P7	

Table 3.8 Signal Connection List (8/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A00INA0	PA0	29	29	20	L1	J4
		PK0	111	93	71	H12	H10
	T32A00INA1	PA3	26	26	17	K2	H1
	T32A00OUTA	PA1	28	28	19	L2	J1
		PW1	76	-	-	N11	-
	T32A00INB0	PA3	26	26	17	K2	H1
		PK1	110	92	70	J12	H11
	T32A00INB1	PA0	29	29	20	L1	J4
	T32A00OUTB	PA2	27	27	18	K1	J2
		PW0	77	-	-	M11	-
	T32A00INC0	PA0	29	29	20	L1	J4
		PK0	111	93	71	H12	H10
	T32A00INC1	PA3	26	26	17	K2	H1
		PK1	110	92	70	J12	H11
	T32A00OUTC	PA1	28	28	19	L2	J1
		PW1	76	-	-	N11	-
	T32A01INA0	PA4	25	25	16	J1	H2
		PK6	105	87	65	J16	H14
	T32A01INA1	PA7	22	22	13	H2	J5
	T32A01OUTA	PA5	24	24	15	J2	G1
		PW2	75	-	-	M10	-
	T32A01INB0	PA7	22	22	13	H2	J5
		PK7	104	86	64	K12	J10
	T32A01INB1	PA4	25	25	16	J1	H2
	T32A01OUTB	PA6	23	23	14	H1	G2
		PW3	74	-	-	N10	-
	T32A01INC0	PA4	25	25	16	J1	H2
		PK6	105	87	65	J16	H14
	T32A01INC1	PA7	22	22	13	H2	J5
		PK7	104	86	64	K12	J10
	T32A01OUTC	PA5	24	24	15	J2	G1
		PW2	75	-	-	M10	-

Table 3.9 Signal Connection List (9/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A02INA0	PB0	21	21	12	G1	H4
		PL0	103	85	63	L13	J11
	T32A02INA1	PB1	20	20	11	G2	H5
	T32A02OUTA	PB2	19	19	10	F1	F1
		PG5	96	80	58	M13	K11
	T32A02INB0	PB1	20	20	11	G2	H5
		PL3	100	82	60	L16	K14
	T32A02INB1	PB0	21	21	12	G1	H4
	T32A02OUTB	PB3	18	18	9	F2	F2
		PG4	97	81	59	L12	K13
	T32A02INC0	PB0	21	21	12	G1	H4
		PL0	103	85	63	L13	J11
	T32A02INC1	PB1	20	20	11	G2	H5
		PL3	100	82	60	L16	K14
	T32A02OUTC	PB2	19	19	10	F1	F1
		PG5	96	80	58	M13	K11
	T32A03INA0	PB6	15	15	6	G4	G4
		PJ4	69	-	-	T9	-
	T32A03INA1	PB7	14	14	5	G5	G5
	T32A03OUTA	PB4	17	17	8	E1	E1
		PT3	31	31	22	H5	K4
	T32A03INB0	PB7	14	14	5	G5	G5
		PJ5	68	-	-	R9	-
	T32A03INB1	PB6	15	15	6	G4	G4
	T32A03OUTB	PB5	16	16	7	E2	E2
		PT5	73	61	-	R10	K9
	T32A03INC0	PB6	15	15	6	G4	G4
		PJ4	69	-	-	T9	-
	T32A03INC1	PB7	14	14	5	G5	G5
		PJ5	68	-	-	R9	-
	T32A03OUTC	PB4	17	17	8	E1	E1
		PT3	31	31	22	H5	K4

Table 3.10 Signal Connection List (10/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A04INA0	PD0	48	40	29	N5	L4
		PP0	141	117	84	D12	D11
	T32A04INA1	PD1	49	41	30	M6	L5
		PP1	142	118	85	D11	D10
	T32A04OUTA	PD2	50	42	31	N6	K6
		PV5	80	64	-	T12	P9
	T32A04INB0	PD1	49	41	30	M6	L5
		PP1	142	118	85	D11	D10
	T32A04INB1	PD0	48	40	29	N5	L4
		PP0	141	117	84	D12	D11
	T32A04OUTB	PD3	51	43	32	M7	L6
		PV4	81	65	-	R12	N10
	T32A04INC0	PD0	48	40	29	N5	L4
		PP0	141	117	84	D12	D11
	T32A04INC1	PD1	49	41	30	M6	L5
		PP1	142	118	85	D11	D10
	T32A04OUTC	PD2	50	42	31	N6	K6
		PV5	80	64	-	T12	P9
	T32A05INA0	PD6	54	46	35	N8	K8
		PP2	143	119	86	B11	B9
	T32A05INA1	PD7	55	47	36	M9	L8
		PP3	144	120	87	A11	A9
	T32A05OUTA	PD4	52	44	33	N7	L7
		PV6	79	63	-	T11	N9
	T32A05INB0	PD7	55	47	36	M9	L8
		PP3	144	120	87	A11	A9
	T32A05INB1	PD6	54	46	35	N8	K8
		PP2	143	119	86	B11	B9
	T32A05OUTB	PD5	53	45	34	M8	K7
		PV7	78	62	-	R11	L9
	T32A05INC0	PD6	54	46	35	N8	K8
		PP2	143	119	86	B11	B9
	T32A05INC1	PD7	55	47	36	M9	L8
		PP3	144	120	87	A11	A9
	T32A05OUTC	PD4	52	44	33	N7	L7
		PV6	79	63	-	T11	N9

Table 3.11 Signal Connection List (11/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A06INA0	PE2	60	52	39	T5	P5
		PP4	145	121	88	E11	D9
	T32A06INA1	PE0	58	50	37	R4	N4
		PP5	146	122	89	D10	E9
	T32A06OUTA	PE1	59	51	38	R5	N5
		PM5	84	68	-	T14	P11
	T32A06INB0	PE3	61	53	40	T6	N6
		PP5	146	122	89	D10	E9
	T32A06INB1	PE0	58	50	37	R4	N4
		PP4	145	121	88	E11	D9
	T32A06OUTB	PE0	58	50	37	R4	N4
		PM4	85	69	-	N12	L10
	T32A06INC0	PE2	60	52	39	T5	P5
		PP4	145	121	88	E11	D9
	T32A06INC1	PE3	61	53	40	T6	N6
		PP5	146	122	89	D10	E9
	T32A06OUTC	PE1	59	51	38	R5	N5
		PM5	84	68	-	T14	P11
	T32A07INA0	PE4	62	54	41	R6	P6
		PP6	147	123	90	B10	B8
	T32A07INA1	PE7	65	57	44	T8	N8
		PP7	148	124	91	A10	A8
	T32A07OUTA	PE6	64	56	43	T7	N7
		PM6	83	67	-	R13	N11
	T32A07INB0	PE5	63	55	42	R7	P7
		PP7	148	124	91	A10	A8
	T32A07INB1	PE7	65	57	44	T8	N8
		PP6	147	123	90	B10	B8
	T32A07OUTB	PE7	65	57	44	T8	N8
		PM7	82	66	-	T13	P10
	T32A07INC0	PE4	62	54	41	R6	P6
		PP6	147	123	90	B10	B8
	T32A07INC1	PE5	63	55	42	R7	P7
		PP7	148	124	91	A10	A8
	T32A07OUTC	PE6	64	56	43	T7	N7
		PM6	83	67	-	R13	N11

Table 3.12 Signal Connection List (12/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A08INA0	PC0	11	11	-	F4	F4
		PR0	149	125	-	E10	D8
	T32A08OUTA	PC2	9	9	-	D1	D1
		PL4	126	-	-	D16	-
	T32A08INB0	PC1	10	10	-	F5	F5
		PR1	150	126	-	D9	E8
	T32A08OUTB	PC3	8	8	-	D2	D2
		PL5	125	-	-	E15	-
	T32A08INC0	PC0	11	11	-	F4	F4
		PR0	149	125	-	E10	D8
	T32A08INC1	PC1	10	10	-	F5	F5
		PR1	150	126	-	D9	E8
	T32A08OUTC	PC2	9	9	-	D1	D1
		PL4	126	-	-	D16	-
	T32A09INA0	PR2	151	127	-	B9	B7
		PV0	115	97	-	F12	F10
	T32A09OUTA	PL6	164	-	-	E7	-
		PV2	113	95	-	G12	G11
	T32A09INB0	PR3	152	128	-	A9	A7
		PV1	114	96	-	G13	F11
	T32A09OUTB	PL7	163	-	-	E8	-
		PV3	112	94	-	H13	G10
	T32A09INC0	PR2	151	127	-	B9	B7
		PV0	115	97	-	F12	F10
	T32A09INC1	PR3	152	128	-	A9	A7
		PV1	114	96	-	G13	F11
	T32A09OUTC	PL6	164	-	-	E7	-
		PV2	113	95	-	G12	G11

Table 3.13 Signal Connection List (13/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
32-bit Timer Event Counter	T32A10INA0	PR4	153	129	-	A8	D7
		PW4	120	-	-	G15	-
	T32A10INA1	PW7	117	-	-	H16	-
	T32A10OUTA	PC4	7	7	-	C1	C1
		PW5	119	-	-	G16	-
	T32A10INB0	PR5	154	130	-	B8	E7
	T32A10OUTB	PC5	6	6	-	C2	C2
		PW4	120	-	-	G15	-
	T32A10INC0	PR4	153	129	-	A8	D7
	T32A10INC1	PR5	154	130	-	B8	E7
	T32A10OUTC	PC4	7	7	-	C1	C1
		PW5	119	-	-	G16	-
	T32A11INA0	PR6	155	131	-	E9	E6
		PW7	117	-	-	H16	-
	T32A11INA1	PW4	120	-	-	G15	-
	T32A11OUTA	PM2	122	100	-	F16	E14
		PW6	118	-	-	H15	-
	T32A11INB0	PR7	156	132	-	D8	D6
	T32A11OUTB	PM3	121	99	-	E13	F13
		PW7	117	-	-	H16	-
	T32A11INC0	PR6	155	131	-	E9	E6
	T32A11INC1	PR7	156	132	-	D8	D6
	T32A11OUTC	PM2	122	100	-	F16	E14
		PW6	118	-	-	H15	-
	T32A12INA0	PU2	36	-	-	J5	-
	T32A12OUTA	PU0	34	-	-	H4	-
	T32A12INB0	PU3	37	-	-	K4	-
	T32A12OUTB	PU1	35	-	-	J4	-
	T32A12INC0	PU2	36	-	-	J5	-
	T32A12INC1	PU3	37	-	-	K4	-
	T32A12OUTC	PU0	34	-	-	H4	-
	T32A13INA0	PU5	39	-	-	L5	-
	T32A13OUTA	PU6	40	-	-	L4	-
	T32A13INB0	PU4	38	-	-	K5	-
	T32A13OUTB	PU7	41	-	-	M4	-
	T32A13INC0	PU5	39	-	-	L5	-
T32A13INC1	PU4	38	-	-	K5	-	
T32A13OUTC	PU6	40	-	-	L4	-	

Table 3.14 Signal Connection List (14/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
External Bus Interface	EA00	PA0	29	29	20	L1	J4
	EA01	PA1	28	28	19	L2	J1
	EA02	PA2	27	27	18	K1	J2
	EA03	PA3	26	26	17	K2	H1
	EA04	PA4	25	25	16	J1	H2
	EA05	PA5	24	24	15	J2	G1
	EA06	PA6	23	23	14	H1	G2
	EA07	PA7	22	22	13	H2	J5
	EA08	PB0	21	21	12	G1	H4
		PE7	65	57	44	T8	N8
	EA09	PB1	20	20	11	G2	H5
		PE6	64	56	43	T7	N7
	EA10	PB2	19	19	10	F1	F1
		PE5	63	55	42	R7	P7
	EA11	PB3	18	18	9	F2	F2
		PE4	62	54	41	R6	P6
	EA12	PB4	17	17	8	E1	E1
		PE3	61	53	40	T6	N6
	EA13	PB5	16	16	7	E2	E2
		PE2	60	52	39	T5	P5
	EA14	PB6	15	15	6	G4	G4
		PE1	59	51	38	R5	N5
	EA15	PB7	14	14	5	G5	G5
		PE0	58	50	37	R4	N4
	EA16	PC0	11	11	-	F4	F4
		PE7	65	57	44	T8	N8
	EA17	PC1	10	10	-	F5	F5
		PE6	64	56	43	T7	N7
	EA18	PC2	9	9	-	D1	D1
		PE5	63	55	42	R7	P7
EA19	PC3	8	8	-	D2	D2	
	PE4	62	54	41	R6	P6	
EA20	PC4	7	7	-	C1	C1	
	PE3	61	53	40	T6	N6	
EA21	PC5	6	6	-	C2	C2	
	PE2	60	52	39	T5	P5	
EA22	PC6	5	5	-	E4	E4	
	PE1	59	51	38	R5	N5	
EA23	PC7	4	4	-	D4	D4	
	PE0	58	50	37	R4	N4	

Table 3.15 Signal Connection List (15/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
External Bus Interface	ED00/EAD00	PD0	48	40	29	N5	L4
	ED01/EAD01	PD1	49	41	30	M6	L5
	ED02/EAD02	PD2	50	42	31	N6	K6
	ED03/EAD03	PD3	51	43	32	M7	L6
	ED04/EAD04	PD4	52	44	33	N7	L7
	ED05/EAD05	PD5	53	45	34	M8	K7
	ED06/EAD06	PD6	54	46	35	N8	K8
	ED07/EAD07	PD7	55	47	36	M9	L8
	ED08/EAD08	PE0	58	50	37	R4	N4
	ED09/EAD09	PE1	59	51	38	R5	N5
	ED10/EAD10	PE2	60	52	39	T5	P5
	ED11/EAD11	PE3	61	53	40	T6	N6
	ED12/EAD12	PE4	62	54	41	R6	P6
	ED13/EAD13	PE5	63	55	42	R7	P7
	ED14/EAD14	PE6	64	56	43	T7	N7
	ED15/EAD15	PE7	65	57	44	T8	N8
	ERD_N	PF0	172	140	97	D5	D5
	EWR_N	PF1	173	141	98	A4	B5
	ECS0_N	PK2	109	91	69	J13	F14
	ECS1_N	PK3	108	90	68	K13	G13
	ECS2_N	PF4	176	144	-	A2	A2
	ECS3_N	PF5	1	1	-	B3	B3
	EBELL_N	PF6	2	2	1	B2	B2
	EBELH_N	PF7	3	3	2	B1	B1
	EALE	PG0	129	105	72	D15	D13
	EWAIT_N	PG1	130	106	73	C16	C14
	EEXBCLK	PY4	30	30	21	M2	K2

Table 3.16 Signal Connection List (16/19)

Related Reference Manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
12-bit Analog to Digital Converter Product Information	AINA00	PN0	133	109	76	B15	B13
	AINA01	PN1	134	110	77	A15	A13
	AINA02	PN2	135	111	78	B14	B12
	AINA03	PN3	136	112	79	A14	A12
	AINA04	PN4	137	113	80	B13	B11
	AINA05	PN5	138	114	81	A13	A11
	AINA06	PN6	139	115	82	B12	B10
	AINA07	PN7	140	116	83	A12	A10
	AINA08	PP0	141	117	84	D12	D11
	AINA09	PP1	142	118	85	D11	D10
	AINA10	PP2	143	119	86	B11	B9
	AINA11	PP3	144	120	87	A11	A9
	AINA12	PP4	145	121	88	E11	D9
	AINA13	PP5	146	122	89	D10	E9
	AINA14	PP6	147	123	90	B10	B8
	AINA15	PP7	148	124	91	A10	A8
	AINA16	PR0	149	125	-	E10	D8
	AINA17	PR1	150	126	-	D9	E8
	AINA18	PR2	151	127	-	B9	B7
	AINA19	PR3	152	128	-	A9	A7
	AINA20	PR4	153	129	-	A8	D7
	AINA21	PR5	154	130	-	B8	E7
	AINA22	PR6	155	131	-	E9	E6
AINA23	PR7	156	132	-	D8	D6	
TRGIN0 (Note)	PG3	132	108	75	B16	B14	
TRGIN1 (Note)	PL7	163	-	-	E8	-	
8-bit Digital to Analog Converter	DAC0	PT0	159	135	94	A6	A5
	DAC1	PT1	160	136	95	A5	A4

Note: When using TRGIN0 and TRGIN1, set the trigger selector. For details on the setting, please refer to reference manual "Product information".

Table 3.17 Signal Connection List (17/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Exception	INT00a	PK7	104	86	64	K12	J10
	INT00b	PT3	31	31	22	H5	K4
	INT01a	PL0	103	85	63	L13	J11
	INT01b	PT4	116	98	-	F13	E11
	INT02a	PA0	29	29	20	L1	J4
	INT02b	PT5	73	61	-	R10	K9
	INT03a	PA7	22	22	13	H2	J5
	INT03b	PL6	164	-	-	E7	-
	INT04a	PB0	21	21	12	G1	H4
	INT04b	PF0	172	140	97	D5	D5
	INT05a	PB1	20	20	11	G2	H5
	INT05b	PF7	3	3	2	B1	B1
	INT06a	PB6	15	15	6	G4	G4
	INT06b	PU2	36	-	-	J5	-
	INT07a	PB7	14	14	5	G5	G5
	INT07b	PU3	37	-	-	K4	-
	INT08a	PG0	129	105	72	D15	D13
	INT08b	PU4	38	-	-	K5	-
	INT09a	PG1	130	106	73	C16	C14
	INT09b	PU5	39	-	-	L5	-
	INT10a	PK0	111	93	71	H12	H10
	INT10b	PP6	147	123	90	B10	B8
	INT11a	PK1	110	92	70	J12	H11
	INT11b	PP7	148	124	91	A10	A8
	INT12a	PC0	11	11	-	F4	F4
	INT12b	PL4	126	-	-	D16	-
	INT13a	PC1	10	10	-	F5	F5
	INT13b	PL5	125	-	-	E15	-
	INT14a	PC6	5	5	-	E4	E4
	INT14b	PM3	121	99	-	E13	F13
	INT15a	PC7	4	4	-	D4	D4
	INT15b	PM4	85	69	-	N12	L10

Table 3.18 Signal Connection List (18/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)	
Advanced Programmable Motor Control Circuit	EMG0	PD6	54	46	35	N8	K8	
		PV6	79	63	-	T11	N9	
	OVV0	PD7	55	47	36	M9	L8	
		PV7	78	62	-	R11	L9	
	UO0	PD0	48	40	29	N5	L4	
		PV0	115	97	-	F12	F10	
	VO0	PD2	50	42	31	N6	K6	
		PV2	113	95	-	G12	G11	
	WO0	PD4	52	44	33	N7	L7	
		PV4	81	65	-	R12	N10	
	XO0	PD1	49	41	30	M6	L5	
		PV1	114	96	-	G13	F11	
	YO0	PD3	51	43	32	M7	L6	
		PV3	112	94	-	H13	G10	
	ZO0	PD5	53	45	34	M8	K7	
		PV5	80	64	-	T12	P9	
	Consumer Electronics Control	CEC0	PT2	171	139	96	E6	E5
	Real Time Clock	ALARM_N	PG2	131	107	74	C15	C13
RTCOUT		PT3	31	31	22	H5	K4	
Remote Control Signal preprocessor	RXIN0	PT3	31	31	22	H5	K4	
	RXIN1	PT4	116	98	-	F13	E11	
Multi-function DMA Controller Product Information	TRGIN2 (Note)	PT3	31	31	22	H5	K4	
High-speed DMA Controller Product Information	HDMAREQA	PB1	20	20	11	G2	H5	
	HDMAREQB	PK1	110	92	70	J12	H11	

Note: When using TRGIN2, set the trigger selector. For details on the setting, please refer to reference manual "Product information".

Table 3.19 Signal Connection List (19/19)

Related reference manual	Function pin name	Port name	M4GR (LQFP176)	M4GQ (LQFP144)	M4GN (LQFP100)	M4GR (BGA177)	M4GQ (BGA145)
Debug Interface Boundary Scan	TMS	PH4	89	73	51	R16	N14
	TCK	PH5	88	72	50	T15	P13
	TDO	PH6	87	71	49	R15	P12
	TDI	PH3	90	74	52	P15	N13
	TRST_N	PH7	86	70	48	R14	N12
	BSC	-	-	-	-	T16	P14
Debug Interface	SWDIO	PH4	89	73	51	R16	N14
	SWCLK	PH5	88	72	50	T15	P13
	SWV	PH6	87	71	49	R15	P12
	TRACECLK	PG6	95	79	57	M16	L14
	TRACEDATA0	PG7	94	78	56	M15	L13
	TRACEDATA1	PH0	93	77	55	N16	L11
	TRACEDATA2	PH1	92	76	54	N15	M13
	TRACEDATA3	PH2	91	75	53	P16	M14
Non-break Debug Interface	NBDCLK	PG6	95	79	57	M16	L14
	NBDDATA0	PG7	94	78	56	M15	L13
	NBDDATA1	PH0	93	77	55	N16	L11
	NBDDATA2	PH1	92	76	54	N15	M13
	NBDDATA3	PH2	91	75	53	P16	M14
	NBDSYNC	PH3	90	74	52	P15	N13
Clock Control and Operation Mode	X1	PY0	45	37	26	T2	P2
	X2	PY1	46	38	27	T3	P3
	XT1	PY2	44	36	25	P1	M1
	XT2	PY3	43	35	24	N1	L1
	EHCLKIN	PY0	45	37	26	T2	P2
	ELCLKIN	PY2	44	36	25	P1	M1
Flash Memory	BOOT_N	PY4	30	30	21	M2	K2

4. Registers

The following registers should be set appropriately to use the ports.

Each register is 32 bits. The configuration of the register depends on the port count and its function assignment.

"x" and "n" in the following table show a port name and a function number, respectively.

Register name		Type	Setting value	Description
[PxDATA]	Data Register	R/W	0 or 1	Read from and write to a port.
[PxCR]	Output Control Register	R/W	0: Output disabled 1: Output enabled	Output control
[PxFRn]	Function Register n	R/W	0: PORT 1: Function	Function setting When this register is set to "1", the assigned function becomes available. Each function assigned to a port has its own function register. If multiple functions are assigned to one port, only one function should be enabled.
[PxOD]	Open-drain Control Register	R/W	0: CMOS 1: Open drain	Programmable open-drain control The programmable open drain is a pseudo-open drain. An output buffer is disabled when the output data is "1", which is set by [PxOD] = 1.
[PxPUP]	Pull-up Control Register	R/W	0: Pull-up disabled 1: Pull-up enabled	Programmable pull-up control
[PxPDN]	Pull-down Control Register	R/W	0: Pull-down disabled 1: Pull-down enabled	Programmable pull-down control
[PxIE]	Input Control Register	R/W	0: Input disabled 1: Input enabled	Input control It takes up to 100ns that an external data is reflected on [PxDATA] after the [PxIE] is enabled.

4.1. List of Register

When the bit which is assigned to no functions is read, "0" is returned. The write to the bit is ignored.

Table 4.1 Ports Base Address

Peripheral function	Channel/unit	Base address	
Input/output ports	PA	-	0x400E0000
	PB	-	0x400E0100
	PC	-	0x400E0200
	PD	-	0x400E0300
	PE	-	0x400E0400
	PF	-	0x400E0500
	PG	-	0x400E0600
	PH	-	0x400E0700
	PJ	-	0x400E0800
	PK	-	0x400E0900
	PL	-	0x400E0A00
	PM	-	0x400E0B00
	PN	-	0x400E0C00
	PP	-	0x400E0D00
	PR	-	0x400E0E00
	PT	-	0x400E0F00
	PU	-	0x400E1000
PV	-	0x400E1100	
PW	-	0x400E1200	
PY	-	0x400E1300	

Table 4.2 Register List

Register name	Address (Base+)	Port A	Port B	Port C	Port D	Port E
Data Register	0x0000	[PADATA]	[PBDATA]	[PCDATA]	[PDDATA]	[PEDATA]
Output Control Register	0x0004	[PACR]	[PBCR]	[PCCR]	[PDCR]	[PECR]
Function Register 1	0x0008	[PAFR1]	[PBFR1]	[PCFR1]	[PDFR1]	[PEFR1]
Function Register 2	0x000C	[PAFR2]	[PBFR2]	-	[PDFR2]	[PEFR2]
Function Register 3	0x0010	[PAFR3]	[PBFR3]	[PCFR3]	[PDFR3]	[PEFR3]
Function Register 4	0x0014	-	[PBFR4]	[PCFR4]	[PDFR4]	[PEFR4]
Function Register 5	0x0018	[PAFR5]	[PBFR5]	[PCFR5]	[PDFR5]	[PEFR5]
Function Register 6	0x001C	[PAFR6]	[PBFR6]	-	[PDFR6]	[PEFR6]
Function Register 7	0x0020	[PAFR7]	-	-	[PDFR7]	[PEFR7]
Function Register 8	0x0024	-	-	-	[PDFR8]	[PEFR8]
Open-Drain Control Register	0x0028	[PAOD]	[PBOD]	[PCOD]	[PDOD]	[PEOD]
Pull-up Control Register	0x002C	[PAPUP]	[PBPUP]	[PCPUP]	[PDPUP]	[PEPUP]
Pull-down Control Register	0x0030	[PAPDN]	[PBPDN]	[PCPDN]	[PDPDN]	[PEPDN]
Input Control Register	0x0038	[PAIE]	[PBIE]	[PCIE]	[PDIE]	[PEIE]

Register name	Address (Base+)	Port F	Port G	Port H	Port J	Port K
Data Register	0x0000	[PFDATA]	[PGDATA]	[PHDATA]	[PJDATA]	[PKDATA]
Output Control Register	0x0004	[PFCR]	[PGCR]	[PHCR]	[PJCR]	[PKCR]
Function Register 1	0x0008	[PFFR1]	[PGFR1]	[PHFR1]	-	[PKFR1]
Function Register 2	0x000C	-	[PGFR2]	-	[PJFR2]	[PKFR2]
Function Register 3	0x0010	-	[PGFR3]	[PHFR3]	[PJFR3]	[PKFR3]
Function Register 4	0x0014	[PFFR4]	[PGFR4]	[PHFR4]	-	[PKFR4]
Function Register 5	0x0018	[PFFR5]	[PGFR5]	[PHFR5]	[PJFR5]	[PKFR5]
Function Register 6	0x001C	[PFFR6]	[PGFR6]	-	[PJFR6]	[PKFR6]
Function Register 7	0x0020	[PFFR7]	[PGFR7]	-	[PJFR7]	[PKFR7]
Function Register 8	0x0024	-	-	-	-	-
Open-Drain Control Register	0x0028	[PFOD]	[PGOD]	[PHOD]	[PJOD]	[PKOD]
Pull-up Control Register	0x002C	[PFPUP]	[PGPUP]	[PHPUP]	[PJPUP]	[PKPUP]
Pull-down Control Register	0x0030	[PFPDN]	[PGPDN]	[PHPDN]	[PJPDN]	[PKPDN]
Input Control Register	0x0038	[PFIE]	[PGIE]	[PHIE]	[PJIE]	[PKIE]

Register name	Address (Base+)	Port L	Port M	Port N	Port P	Port R
Data Register	0x0000	[PLDATA]	[PMDATA]	[PNDATA]	[PPDATA]	[PRDATA]
Output Control Register	0x0004	[PLCR]	[PMCR]	[PNCR]	[PPCR]	[PRCR]
Function Register 1	0x0008	[PLFR1]	[PMFR1]	-	-	-
Function Register 2	0x000C	[PLFR2]	[PMFR2]	-	[PPFR2]	[PRFR2]
Function Register 3	0x0010	[PLFR3]	[PMFR3]	-	[PPFR3]	[PRFR3]
Function Register 4	0x0014	-	[PMFR4]	-	-	-
Function Register 5	0x0018	[PLFR5]	[PMFR5]	-	[PPFR5]	-
Function Register 6	0x001C	[PLFR6]	[PMFR6]	-	-	-
Function Register 7	0x0020	[PLFR7]	[PMFR7]	-	-	-
Function Register 8	0x0024	-	-	-	-	-
Open-Drain Control Register	0x0028	[PLOD]	[PMOD]	[PNOD]	[PPOD]	[PROD]
Pull-up Control Register	0x002C	[PLPUP]	[PMPUP]	[PNPUP]	[PPPUP]	[PRPUP]
Pull-down Control Register	0x0030	[PLPDN]	[PMPDN]	[PNPDN]	[PPPDN]	[PRPDN]
Input Control Register	0x0038	[PLIE]	[PMIE]	[PNIE]	[PPIE]	[PRIE]

Register name	Address (Base+)	Port T	Port U	Port V	Port W	Port Y
Data Register	0x0000	[PTDATA]	[PUDATA]	[PVDATA]	[PWDATA]	[PYDATA]
Output Control Register	0x0004	[PTCR]	[PUCR]	[PVCR]	[PWCR]	[PYCR]
Function Register 1	0x0008	[PTFR1]	-	[PVFR1]	-	[PYFR1]
Function Register 2	0x000C	[PTFR2]	[PUFR2]	[PVFR2]	-	-
Function Register 3	0x0010	[PTFR3]	[PUFR3]	[PVFR3]	[PWFR3]	-
Function Register 4	0x0014	-	-	[PVFR4]	[PWFR4]	[PYFR4]
Function Register 5	0x0018	-	-	[PVFR5]	[PWFR5]	-
Function Register 6	0x001C	[PTFR6]	[PUFR6]	[PVFR6]	[PWFR6]	-
Function Register 7	0x0020	[PTFR7]	[PUFR7]	[PVFR7]	[PWFR7]	-
Function Register 8	0x0024	-	-	-	-	-
Open-Drain Control Register	0x0028	[PTOD]	[PUOD]	[PVOD]	[PWOD]	[PYOD]
Pull-up Control Register	0x002C	[PTPUP]	[PUPUP]	[PVPUP]	[PWPUP]	[PYPUP]
Pull-down Control Register	0x0030	[PTPDN]	[PUPDN]	[PVPDN]	[PWPDN]	[PYPDN]
Input Control Register	0x0038	[PTIE]	[PUIE]	[PVIE]	[PWIE]	[PYIE]

Note: Do not access the address described as "-".

4.2. List of Port Functions and Settings

It is explained about viewpoint of a port register setting table.

The column of $[PxFRn]$ shows the function register which should be set. When this register is set to "1", the corresponding function is enabled. ("x" is a port name and "n" is a function number.)

The bit in the "N/A" in the tables returns "0" when it is read. The write to the bit is ignored.

"0" or "1" in the tables shows the value which should be set. "0/1" means either value can be set.

Value of bit 0 each control register

Value of bit 7 each control register

PORT	Reset status	Function	Input/Output	PORT Type	Control register						
					[PADATA]	[PACR]	[PAFRn]	[PAOD]	[PAPUP]	[PAPDN]	[PAIE]
PA0	After reset				0	0	0	0	0	0	0
	Input Port		Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port		Output		0/1	1	0	0/1	0/1	0/1	0
	INT02a		Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA00		Output	FTU1	0/1	1	0	0/1	0/1	0/1	0
	T32A00INB1		Input	FTU1	0/1	0	0	0/1	0/1	0/1	1
	T32A00INA0		Input	FTU1	0/1	0	0	0/1	0/1	0/1	1
	T32A00INC0		Input	FTU1	0/1	0	0	0/1	0/1	0/1	1
	TSPI0CSIN		Input	FTU1	0/1	0	0	0/1	0/1	0/1	1
	TSPI0CS0		Output	FTU1	0/1	1	0	0/1	0/1	0/1	0
PA7	After reset				0	0	0	0	0	0	0
	Input Port		Input		0/1	0	0	0/1	0/1	0/1	1
Output Port		Output		0/1	1	0	0/1	0/1	0/1	0	

$[PxFRn]$	Pin					
	TSPI0CSIN	T32A00INC0	T32A00INA0	T32A00INB1	EA00	Input Port Output Port INT02a
$[PAFR1]$ <bit0>	0	0	0	0	1	0
$[PAFR2]$ <bit0>	0	0	0	1	0	0
$[PAFR3]$ <bit0>	0	0	1	0	0	0
$[PAFR5]$ <bit0>	0	1	0	0	0	0
$[PAFR6]$ <bit0>	1	0	0	0	0	0

4.2.1. Setting of Using Alternated Pin

To use the alternated pins as peripheral function output pins, set the peripheral function ($[PxFRn]$ <bit $m \geq 1$) that uses the function register and enable output control register ($[PxCR]$ <bit $m \geq 1$), then set the peripheral functions. If output is enabled before setting the function register, the data register value of the port is output until the function register is set.

To use the alternated pins as input pins of the peripheral function, set the input control register of the port ($[PxIE]$ <bit $m \geq 1$) and set the peripheral function that uses the function register ($[PxFRn]$ <bit $m \geq 1$), then set the peripheral functions.

To use peripheral functions such as I2C, set the input control register of the port ($[PxIE]$ <bit $m \geq 1$), set the peripheral function ($[PxFRn]$ <bit $m \geq 1$) and set the output control register to output enable ($[PxCR]$ <bit $m \geq 1$), then set the peripheral function.

- When multiple functions are assigned to the same pin, please choose only one function for usage.
- When same function is assigned to multiple pins, please the function use exclusively.

4.2.2. PORT A

Table 4.3 Port A Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PADATA]	[PACR]	[PAFRn]	[PAOD]	[PAPUP]	[PAPDN]	[PAIE]
PA0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT02a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA00	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A00INB1	Input	FTU1	0/1	0	[PAFR2]	0/1	0/1	0/1	1
	T32A00INA0	Input	FTU1	0/1	0	[PAFR3]	0/1	0/1	0/1	1
	T32A00INC0	Input	FTU1	0/1	0	[PAFR5]	0/1	0/1	0/1	1
	TSPI0CSIN	Input	FTU1	0/1	0	[PAFR6]	0/1	0/1	0/1	1
TSPI0CS0	Output	FTU1	0/1	1	[PAFR7]	0/1	0/1	0/1	0	
PA1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA01	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A00OUTA	Output	FTU1	0/1	1	[PAFR3]	0/1	0/1	0/1	0
	T32A00OUTC	Output	FTU1	0/1	1	[PAFR5]	0/1	0/1	0/1	0
	TSPI0SCK	Input Output	FTU1	0/1 0/1	0 1	[PAFR7] [PAFR7]	0/1 0/1	0/1 0/1	0/1 0/1	1 0
PA2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA02	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A00OUTB	Output	FTU1	0/1	1	[PAFR3]	0/1	0/1	0/1	0
TSPI0RXD	Input	FTU1	0/1	0	[PAFR7]	0/1	0/1	0/1	1	
PA3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA03	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A00INA1	Input	FTU1	0/1	0	[PAFR2]	0/1	0/1	0/1	1
	T32A00INB0	Input	FTU1	0/1	0	[PAFR3]	0/1	0/1	0/1	1
	T32A00INC1	Input	FTU1	0/1	0	[PAFR5]	0/1	0/1	0/1	1
	TSPI2CS1	Output	FTU1	0/1	1	[PAFR6]	0/1	0/1	0/1	0
TSPI0TXD	Output	FTU2	0/1	1	[PAFR7]	0/1	0/1	0/1	0	
PA4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA04	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A01INB1	Input	FTU1	0/1	0	[PAFR2]	0/1	0/1	0/1	1
	T32A01INA0	Input	FTU1	0/1	0	[PAFR3]	0/1	0/1	0/1	1
	T32A01INC0	Input	FTU1	0/1	0	[PAFR5]	0/1	0/1	0/1	1
	TSPI0CS1	Output	FTU1	0/1	1	[PAFR6]	0/1	0/1	0/1	0
TSPI2TXD	Output	FTU2	0/1	1	[PAFR7]	0/1	0/1	0/1	0	
PA5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA05	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A01OUTA	Output	FTU1	0/1	1	[PAFR3]	0/1	0/1	0/1	0
	T32A01OUTC	Output	FTU1	0/1	1	[PAFR5]	0/1	0/1	0/1	0
	TSPI0CS2	Output	FTU1	0/1	1	[PAFR6]	0/1	0/1	0/1	0
	TSPI2RXD	Input	FTU1	0/1	0	[PAFR7]	0/1	0/1	0/1	1

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PADATA]	[PACR]	[PAFRn]	[PAOD]	[PAPUP]	[PAPDN]	[PAIE]
PA6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA06	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A01OUTB	Output	FTU1	0/1	1	[PAFR3]	0/1	0/1	0/1	0
	TSPI0CS3	Output	FTU1	0/1	1	[PAFR6]	0/1	0/1	0/1	0
	TSPI2SCK	Input	FTU1	0/1	0	[PAFR7]	0/1	0/1	0/1	1
Output		0/1		1	[PAFR7]	0/1	0/1	0/1	0	
PA7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT03a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA07	Output	FTU1	0/1	1	[PAFR1]	0	0/1	0/1	0
	T32A01INA1	Input	FTU1	0/1	0	[PAFR2]	0/1	0/1	0/1	1
	T32A01INB0	Input	FTU1	0/1	0	[PAFR3]	0/1	0/1	0/1	1
	T32A01INC1	Input	FTU1	0/1	0	[PAFR5]	0/1	0/1	0/1	1
	TSPI2CSIN	Input	FTU1	0/1	0	[PAFR6]	0/1	0/1	0/1	1
	TSPI2CS0	Output	FTU1	0/1	1	[PAFR7]	0/1	0/1	0/1	0

4.2.3. PORT B

Table 4.4 Port B Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PBDATA]	[PBCR]	[PBFRn]	[PBOD]	[PBPUP]	[PBPDN]	[PBIE]
PB0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT04a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA08	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A02INB1	Input	FTU1	0/1	0	[PBFR2]	0/1	0/1	0/1	1
	T32A02INA0	Input	FTU1	0/1	0	[PBFR3]	0/1	0/1	0/1	1
	I2S0MCLK	Input	FTU2	0/1	0	[PBFR4]	0/1	0/1	0/1	1
		Output		0/1	1	[PBFR4]	0/1	0/1	0/1	0
T32A02INC0	Input	FTU1	0/1	0	[PBFR5]	0/1	0/1	0/1	1	
PB1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT05a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA09	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A02INA1	Input	FTU1	0/1	0	[PBFR2]	0/1	0/1	0/1	1
	T32A02INB0	Input	FTU1	0/1	0	[PBFR3]	0/1	0/1	0/1	1
	T32A02INC1	Input	FTU1	0/1	0	[PBFR5]	0/1	0/1	0/1	1
HDMAREQA	Input	FTU1	0/1	0	[PBFR6]	0/1	0/1	0/1	1	
PB2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA10	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A02OUTA	Output	FTU1	0/1	1	[PBFR3]	0/1	0/1	0/1	0
T32A02OUTC	Output	FTU1	0/1	1	[PBFR5]	0/1	0/1	0/1	0	
PB3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA11	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
T32A02OUTB	Output	FTU1	0/1	1	[PBFR3]	0/1	0/1	0/1	0	
PB4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA12	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A03OUTA	Output	FTU1	0/1	1	[PBFR3]	0/1	0/1	0/1	0
	I2S0LRCK	Input	FTU2	0/1	0	[PBFR4]	0/1	0/1	0/1	1
	Output	0/1		1	[PBFR4]	0/1	0/1	0/1	0	
T32A03OUTC	Output	FTU1	0/1	1	[PBFR5]	0/1	0/1	0/1	0	
PB5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA13	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A03OUTB	Output	FTU1	0/1	1	[PBFR3]	0/1	0/1	0/1	0
	I2S0BCK	Input	FTU2	0/1	0	[PBFR4]	0/1	0/1	0/1	1
	Output	0/1		1	[PBFR4]	0/1	0/1	0/1	0	

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PBDATA]	[PBCR]	[PBFRn]	[PBOD]	[PBPUP]	[PBPDN]	[PBIE]
PB6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT06a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA14	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A03INB1	Input	FTU1	0/1	0	[PBFR2]	0/1	0/1	0/1	1
	T32A03INA0	Input	FTU1	0/1	0	[PBFR3]	0/1	0/1	0/1	1
	I2S0DI	Input	FTU1	0/1	0	[PBFR4]	0/1	0/1	0/1	1
T32A03INC0	Input	FTU1	0/1	0	[PBFR5]	0/1	0/1	0/1	1	
PB7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT07a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA15	Output	FTU1	0/1	1	[PBFR1]	0	0/1	0/1	0
	T32A03INA1	Input	FTU1	0/1	0	[PBFR2]	0/1	0/1	0/1	1
	T32A03INB0	Input	FTU1	0/1	0	[PBFR3]	0/1	0/1	0/1	1
	I2S0DO	Output	FTU1	0/1	1	[PBFR4]	0/1	0/1	0/1	0
T32A03INC1	Input	FTU1	0/1	0	[PBFR5]	0/1	0/1	0/1	1	

4.2.4. PORT C

Table 4.5 Port C Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PCDATA]	[PCCR]	[PCFRn]	[PCOD]	[PCPUP]	[PCPDN]	[PCIE]
PC0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT12a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA16	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
	T32A08INA0	Input	FTU1	0/1	0	[PCFR3]	0/1	0/1	0/1	1
	I2S1DO	Output	FTU1	0/1	1	[PCFR4]	0/1	0/1	0/1	0
	T32A08INC0	Input	FTU1	0/1	0	[PCFR5]	0/1	0/1	0/1	1
PC1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT13a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EA17	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
	T32A08INB0	Input	FTU1	0/1	0	[PCFR3]	0/1	0/1	0/1	1
	I2S1DI	Input	FTU1	0/1	0	[PCFR4]	0/1	0/1	0/1	1
	T32A08INC1	Input	FTU1	0/1	0	[PCFR5]	0/1	0/1	0/1	1
PC2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA18	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
	T32A08OUTA	Output	FTU1	0/1	1	[PCFR3]	0/1	0/1	0/1	0
	I2S1BCK	Input		0/1	0	[PCFR4]	0/1	0/1	0/1	1
		Output	FTU2	0/1	1	[PCFR4]	0/1	0/1	0/1	0
T32A08OUTC	Output	FTU1	0/1	1	[PCFR5]	0/1	0/1	0/1	0	
PC3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA19	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
	T32A08OUTB	Output	FTU1	0/1	1	[PCFR3]	0/1	0/1	0/1	0
	I2S1LRCK	Input		0/1	0	[PCFR4]	0/1	0/1	0/1	1
	Output	FTU2	0/1	1	[PCFR4]	0/1	0/1	0/1	0	
PC4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA20	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
	T32A10OUTA	Output	FTU1	0/1	1	[PCFR3]	0/1	0/1	0/1	0
T32A10OUTC	Output	FTU1	0/1	1	[PCFR5]	0/1	0/1	0/1	0	
PC5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EA21	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0
T32A10OUTB	Output	FTU1	0/1	1	[PCFR3]	0/1	0/1	0/1	0	
PC6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT14a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
EA22	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0	
PC7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT15a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
EA23	Output	FTU1	0/1	1	[PCFR1]	0	0/1	0/1	0	

4.2.5. PORT D

Table 4.6 Port D Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PDDATA]	[PDCR]	[PDFRn]	[PDOD]	[PDPUP]	[PDPDN]	[PDIE]
PD0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED00/EAD00	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A04INB1	Input	FTU1	0/1	0	[PDFR2]	0/1	0/1	0/1	1
	T32A04INA0	Input	FTU1	0/1	0	[PDFR3]	0/1	0/1	0/1	1
	TSPI4CS0	Output	FTU1	0/1	1	[PDFR4]	0/1	0/1	0/1	0
	T32A04INC0	Input	FTU1	0/1	0	[PDFR5]	0/1	0/1	0/1	1
	TSPI4CSIN	Input	FTU1	0/1	0	[PDFR6]	0/1	0/1	0/1	1
UO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0	
PD1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED01/EAD01	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A04INA1	Input	FTU1	0/1	0	[PDFR2]	0/1	0/1	0/1	1
	T32A04INB0	Input	FTU1	0/1	0	[PDFR3]	0/1	0/1	0/1	1
	TSPI4SCK	Input	FTU1	0/1	0	[PDFR4]	0/1	0/1	0/1	1
		Output		0/1	1	[PDFR4]	0/1	0/1	0/1	0
	T32A04INC1	Input	FTU1	0/1	0	[PDFR5]	0/1	0/1	0/1	1
XO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0	
PD2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED02/EAD02	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A04OUTA	Output	FTU1	0/1	1	[PDFR3]	0/1	0/1	0/1	0
	TSPI4RXD	Input	FTU1	0/1	0	[PDFR4]	0/1	0/1	0/1	1
	T32A04OUTC	Output	FTU1	0/1	1	[PDFR5]	0/1	0/1	0/1	0
	VO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0
	TSSI0TCK	Input	FTU2	0/1	0	[PDFR8]	0/1	0/1	0/1	1
Output		0/1		1	[PDFR8]	0/1	0/1	0/1	0	
PD3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED03/EAD03	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A04OUTB	Output	FTU1	0/1	1	[PDFR3]	0/1	0/1	0/1	0
	TSPI4TXD	Output	FTU2	0/1	1	[PDFR4]	0/1	0/1	0/1	0
	YO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0
	TSSI0TFS	Input	FTU2	0/1	0	[PDFR8]	0/1	0/1	0/1	1
Output		0/1		1	[PDFR8]	0/1	0/1	0/1	0	
PD4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED04/EAD04	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A05OUTA	Output	FTU1	0/1	1	[PDFR3]	0/1	0/1	0/1	0
	T32A05OUTC	Output	FTU1	0/1	1	[PDFR5]	0/1	0/1	0/1	0
	I2S0LRCK	Input	FTU2	0/1	0	[PDFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PDFR6]	0/1	0/1	0/1	0
	WO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0
TSSI0TXD	Output	FTU2	0/1	1	[PDFR8]	0/1	0/1	0/1	0	

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PDDATA]	[PDCR]	[PDFRn]	[PDOD]	[PDPUP]	[PDPDN]	[PDIE]
PD5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED05/EAD05	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A05OUTB	Output	FTU1	0/1	1	[PDFR3]	0/1	0/1	0/1	0
	I2S0BCK	Input	FTU2	0/1	0	[PDFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PDFR6]	0/1	0/1	0/1	0
	ZO0	Output	FTU2	0/1	1	[PDFR7]	0/1	0/1	0/1	0
TSSI0RXD	Input	FTU1	0/1	0	[PDFR8]	0/1	0/1	0/1	1	
PD6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED06/EAD06	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A05INB1	Input	FTU1	0/1	0	[PDFR2]	0/1	0/1	0/1	1
	T32A05INA0	Input	FTU1	0/1	0	[PDFR3]	0/1	0/1	0/1	1
	T32A05INC0	Input	FTU1	0/1	0	[PDFR5]	0/1	0/1	0/1	1
	I2S0DI	Input	FTU1	0/1	0	[PDFR6]	0/1	0/1	0/1	1
	EMG0	Input	FTU1	0/1	0	[PDFR7]	0/1	0/1	0/1	1
	TSSI0RFS	Input	FTU2	0/1	0	[PDFR8]	0/1	0/1	0/1	1
Output		0/1		1	[PDFR8]	0/1	0/1	0/1	0	
PD7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED07/EAD07	I/O	FTU14	0/1	1	[PDFR1]	0	0/1	0/1	1
	T32A05INA1	Input	FTU1	0/1	0	[PDFR2]	0/1	0/1	0/1	1
	T32A05INB0	Input	FTU1	0/1	0	[PDFR3]	0/1	0/1	0/1	1
	T32A05INC1	Input	FTU1	0/1	0	[PDFR5]	0/1	0/1	0/1	1
	I2S0DO	Output	FTU1	0/1	1	[PDFR6]	0/1	0/1	0/1	0
	OVV0	Input	FTU1	0/1	0	[PDFR7]	0/1	0/1	0/1	1
	TSSI0RCK	Input	FTU2	0/1	0	[PDFR8]	0/1	0/1	0/1	1
Output		0/1		1	[PDFR8]	0/1	0/1	0/1	0	

4.2.6. PORT E

Table 4.7 Port E Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PEDATA]	[PECR]	[PEFRn]	[PEOD]	[PEPUP]	[PEPDN]	[PEIE]
PE0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED08/EAD08	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A06INB1	Input	FTU1	0/1	0	[PEFR2]	0/1	0/1	0/1	1
	T32A06OUTB	Output	FTU1	0/1	1	[PEFR3]	0/1	0/1	0/1	0
	EA23	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A06INA1	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	UT0RTS_N	Output	FTU1	0/1	1	[PEFR7]	0/1	0/1	0/1	0
EA15	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED09/EAD09	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A06OUTA	Output	FTU1	0/1	1	[PEFR3]	0/1	0/1	0/1	0
	EA22	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A06OUTC	Output	FTU1	0/1	1	[PEFR5]	0/1	0/1	0/1	0
	UT0CTS_N	Input	FTU1	0/1	0	[PEFR7]	0/1	0/1	0/1	1
EA14	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED10/EAD10	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A06INA0	Input	FTU1	0/1	0	[PEFR3]	0/1	0/1	0/1	1
	EA21	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A06INC0	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	UT0RXD	Input	FTU1	0/1	0	[PEFR7]	0/1	0/1	0/1	1
EA13	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED11/EAD11	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A06INB0	Input	FTU1	0/1	0	[PEFR3]	0/1	0/1	0/1	1
	EA20	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A06INC1	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	UT0TXDA	Output	FTU1	0/1	1	[PEFR7]	0/1	0/1	0/1	0
EA12	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED12/EAD12	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A07INA0	Input	FTU1	0/1	0	[PEFR3]	0/1	0/1	0/1	1
	EA19	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A07INC0	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	I2S1DO	Output	FTU1	0/1	1	[PEFR6]	0/1	0/1	0/1	0
	ISDAIN0	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	EA11	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PEDATA]	[PECR]	[PEFRn]	[PEOD]	[PEPUP]	[PEPDN]	[PEIE]
PE5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED13/EAD13	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A07INB0	Input	FTU1	0/1	0	[PEFR3]	0/1	0/1	0/1	1
	EA18	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A07INC1	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	I2S1DI	Input	FTU1	0/1	0	[PEFR6]	0/1	0/1	0/1	1
	ISDAIN1	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
EA10	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED14/EAD14	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A07OUTA	Output	FTU1	0/1	1	[PEFR3]	0/1	0/1	0/1	0
	EA17	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A07OUTC	Output	FTU1	0/1	1	[PEFR5]	0/1	0/1	0/1	0
	I2S1BCK	Input	FTU2	0/1	0	[PEFR6]	0/1	0/1	0/1	1
		Output	FTU2	0/1	1	[PEFR6]	0/1	0/1	0/1	0
ISDAIN2	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1	
EA09	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	
PE7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ED15/EAD15	I/O	FTU14	0/1	1	[PEFR1]	0	0/1	0/1	1
	T32A07INB1	Input	FTU1	0/1	0	[PEFR2]	0/1	0/1	0/1	1
	T32A07OUTB	Output	FTU1	0/1	1	[PEFR3]	0/1	0/1	0/1	0
	EA16	Output	FTU1	0/1	1	[PEFR4]	0	0/1	0/1	0
	T32A07INA1	Input	FTU1	0/1	0	[PEFR5]	0/1	0/1	0/1	1
	I2S1LRCK	Input	FTU2	0/1	0	[PEFR6]	0/1	0/1	0/1	1
	Output	FTU2	0/1	1	[PEFR6]	0/1	0/1	0/1	0	
ISDAIN3	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1	
EA08	Output	FTU1	0/1	1	[PEFR8]	0	0/1	0/1	0	

4.2.7. PORT F

Table 4.8 Port F Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PFDATA]	[PFCR]	[PFFRn]	[PFOD]	[PFPUP]	[PFPDN]	[PFIE]
PF0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT04b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	ERD_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
PF1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EWR_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
PF2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C1SDA	I/O	FTU1	0/1	1	[PFFR6]	1	0/1	0	1
	I2C1SDA	I/O	FTU1	0/1	1	[PFFR7]	1	0/1	0	1
PF3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C1SCL	I/O	FTU1	0/1	1	[PFFR6]	1	0/1	0	1
	I2C1SCL	I/O	FTU1	0/1	1	[PFFR7]	1	0/1	0	1
PF4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ECS2_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
PF5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ECS3_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
PF6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EBELL_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
PF7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT05b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EBELH_N	Output	FTU1	0/1	1	[PFFR1]	0/1	0/1	0/1	0
	TSPI2CSIN	Input	FTU1	0/1	0	[PFFR4]	0/1	0/1	0/1	1
	TSPI2CS0	Output	FTU1	0/1	1	[PFFR5]	0/1	0/1	0/1	0

4.2.8. PORT G

Table 4.9 Port G Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PGDATA]	[PGCR]	[PGFRn]	[PGOD]	[PGPUP]	[PGPDN]	[PGIE]
PG0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT08a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EALE	Output	FTU1	0/1	1	[PGFR1]	0	0/1	0/1	0
	UT2RXD	Input	FTU1	0/1	0	[PGFR3]	0/1	0/1	0/1	1
	UT2TXDA	Output	FTU1	0/1	1	[PGFR5]	0/1	0/1	0/1	0
PG1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT09a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	EWAIT_N	Input	FTU1	0/1	0	[PGFR1]	0/1	0/1	0/1	1
	UT2TXDA	Output	FTU1	0/1	1	[PGFR3]	0/1	0/1	0/1	0
	UT2RXD	Input	FTU1	0/1	0	[PGFR5]	0/1	0/1	0/1	1
PG2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT2RTS_N	Output	FTU1	0/1	1	[PGFR3]	0/1	0/1	0/1	0
	ALARM_N	Output	FTU1	0/1	1	[PGFR4]	0/1	0/1	0/1	0
	UT2CTS_N	Input	FTU1	0/1	0	[PGFR5]	0/1	0/1	0/1	1
	EI2C0SDA	I/O	FTU1	0/1	1	[PGFR6]	1	0/1	0	1
I2C0SDA	I/O	FTU1	0/1	1	[PGFR7]	1	0/1	0	1	
PG3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT2CTS_N	Input	FTU1	0/1	0	[PGFR3]	0/1	0/1	0/1	1
	TRGIN0	Input	FTU1	0/1	0	[PGFR4]	0/1	0/1	0/1	1
	UT2RTS_N	Output	FTU1	0/1	1	[PGFR5]	0/1	0/1	0/1	0
	EI2C0SCL	I/O	FTU1	0/1	1	[PGFR6]	1	0/1	0	1
I2C0SCL	I/O	FTU1	0/1	1	[PGFR7]	1	0/1	0	1	
PG4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A02OUTB	Output	FTU1	0/1	1	[PGFR2]	0/1	0/1	0/1	0
	FUT0IROUT	Output	FTU1	0/1	1	[PGFR4]	0/1	0/1	0/1	0
	FUT0TXD	Output	FTU1	0/1	1	[PGFR5]	0/1	0/1	0/1	0
	EI2C2SDA	I/O	FTU1	0/1	1	[PGFR6]	1	0/1	0	1
I2C2SDA	I/O	FTU1	0/1	1	[PGFR7]	1	0/1	0	1	
PG5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A02OUTA	Output	FTU1	0/1	1	[PGFR2]	0/1	0/1	0/1	0
	T32A02OUTC	Output	FTU1	0/1	1	[PGFR3]	0/1	0/1	0/1	0
	FUT0IRIN	Input	FTU1	0/1	0	[PGFR4]	0/1	0/1	0/1	1
	FUT0RXD	Input	FTU1	0/1	0	[PGFR5]	0/1	0/1	0/1	1
	EI2C2SCL	I/O	FTU1	0/1	1	[PGFR6]	1	0/1	0	1
	I2C2SCL	I/O	FTU1	0/1	1	[PGFR7]	1	0/1	0	1

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PGDATA]	[PGCR]	[PGFRn]	[PGOD]	[PGPUP]	[PGPDN]	[PGIE]
PG6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRACECLK	Output	FTU1	0/1	1	[PGFR1]	0/1	0/1	0/1	0
	NBDCLK	Input	FTU3	0/1	0	[PGFR4]	0/1	0/1	0/1	1
	FUT0RTS_N	Output	FTU1	0/1	1	[PGFR5]	0/1	0/1	0/1	0
	I2S1MCLK	Input	FTU2	0/1	0	[PGFR6]	0/1	0/1	0/1	1
Output		0/1		1	[PGFR6]	0/1	0/1	0/1	0	
PG7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRACEDATA0	Output	FTU1	0/1	1	[PGFR1]	0/1	0/1	0/1	0
	NBDDATA0	I/O	FTU2b	0/1	1	[PGFR4]	0/1	0/1	0/1	1
	FUT0CTS_N	Input	FTU1	0/1	0	[PGFR5]	0/1	0/1	0/1	1
		Output		0/1	1	[PGFR5]	0/1	0/1	0/1	0

4.2.9. PORT H

Table 4.10 Port H Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PHDATA]	[PHCR]	[PHFRn]	[PHOD]	[PHPUP]	[PHPDN]	[PHIE]
PH0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRACEDATA1	Output	FTU1	0/1	1	[PHFR1]	0/1	0/1	0/1	0
	UT1RXD	Input	FTU1	0/1	0	[PHFR3]	0/1	0/1	0/1	1
	NBDDATA1	I/O	FTU2b	0/1	1	[PHFR4]	0/1	0/1	0/1	1
	UT1TXDA	Output	FTU1	0/1	1	[PHFR5]	0/1	0/1	0/1	0
PH1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRACEDATA2	Output	FTU1	0/1	1	[PHFR1]	0/1	0/1	0/1	0
	UT1TXDA	Output	FTU1	0/1	1	[PHFR3]	0/1	0/1	0/1	0
	NBDDATA2	I/O	FTU2b	0/1	1	[PHFR4]	0/1	0/1	0/1	1
	UT1RXD	Input	FTU1	0/1	0	[PHFR5]	0/1	0/1	0/1	1
PH2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRACEDATA3	Output	FTU1	0/1	1	[PHFR1]	0/1	0/1	0/1	0
	UT1RTS_N	Output	FTU1	0/1	1	[PHFR3]	0/1	0/1	0/1	0
	NBDDATA3	I/O	FTU2b	0/1	1	[PHFR4]	0/1	0/1	0/1	1
	UT1CTS_N	Input	FTU1	0/1	0	[PHFR5]	0/1	0/1	0/1	1
PH3	After reset (TDI)	Input	FTU2	0	0	[PHFR1]	0	1	0	1
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT1CTS_N	Input	FTU1	0/1	0	[PHFR3]	0/1	0/1	0/1	1
	NBDSYNC	Input	FTU3	0/1	0	[PHFR4]	0/1	0/1	0/1	1
	UT1RTS_N	Output	FTU1	0/1	1	[PHFR5]	0/1	0/1	0/1	0
PH4	After reset (TMS/SWDIO)	I/O	FTU2	0	1 (Note)	[PHFR1]	0	1	0	1
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT0RXD	Input	FTU1	0/1	0	[PHFR3]	0/1	0/1	0/1	1
	UT0TXDA	Output	FTU1	0/1	1	[PHFR5]	0/1	0/1	0/1	0
PH5	After reset (TCK/SWCLK)	Input	FTU2	0	0	[PHFR1]	0	0	1	1
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT0TXDA	Output	FTU1	0/1	1	[PHFR3]	0/1	0/1	0/1	0
	UT0RXD	Input	FTU1	0/1	0	[PHFR5]	0/1	0/1	0/1	1
PH6	After reset (TDO/SWV)	Output	FTU2	0	1 (Note)	[PHFR1]	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT0RTS_N	Output	FTU1	0/1	1	[PHFR3]	0/1	0/1	0/1	0
	UT0CTS_N	Input	FTU1	0/1	0	[PHFR5]	0/1	0/1	0/1	1
PH7	After reset (TRST_N)	Input	FTU3	0	0	[PHFR1]	0	1	0	1
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT0CTS_N	Input	FTU1	0/1	0	[PHFR3]	0/1	0/1	0/1	1
	UT0RTS_N	Output	FTU1	0/1	1	[PHFR5]	0/1	0/1	0/1	0

Note: When receive the command from TOOL, it becomes output.

4.2.10. PORT J

Table 4.11 Port J Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PJDATA]	[PJCR]	[PJFRn]	[PJOD]	[PJPUP]	[PJPDN]	[PJIE]
PJ0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT5RXD	Input	FTU1	0/1	0	[PJFR3]	0/1	0/1	0/1	1
	UT5TXDA	Output	FTU1	0/1	1	[PJFR5]	0/1	0/1	0/1	0
PJ1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT5TXDA	Output	FTU1	0/1	1	[PJFR3]	0/1	0/1	0/1	0
	UT5RXD	Input	FTU1	0/1	0	[PJFR5]	0/1	0/1	0/1	1
PJ2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT5RTS_N	Output	FTU1	0/1	1	[PJFR3]	0/1	0/1	0/1	0
	UT5CTS_N	Input	FTU1	0/1	0	[PJFR5]	0/1	0/1	0/1	1
	EI2C4SCL	I/O	FTU1	0/1	1	[PJFR6]	1	0/1	0	1
	I2C4SCL	I/O	FTU1	0/1	1	[PJFR7]	1	0/1	0	1
PJ3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	UT5CTS_N	Input	FTU1	0/1	0	[PJFR3]	0/1	0/1	0/1	1
	UT5RTS_N	Output	FTU1	0/1	1	[PJFR5]	0/1	0/1	0/1	0
	EI2C4SDA	I/O	FTU1	0/1	1	[PJFR6]	1	0/1	0	1
	I2C4SDA	I/O	FTU1	0/1	1	[PJFR7]	1	0/1	0	1
PJ4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A03INA0	Input	FTU1	0/1	0	[PJFR2]	0/1	0/1	0/1	1
	T32A03INC0	Input	FTU1	0/1	0	[PJFR3]	0/1	0/1	0/1	1
	FUT0TXD	Output	FTU1	0/1	1	[PJFR5]	0/1	0/1	0/1	0
PJ5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A03INB0	Input	FTU1	0/1	0	[PJFR2]	0/1	0/1	0/1	1
	T32A03INC1	Input	FTU1	0/1	0	[PJFR3]	0/1	0/1	0/1	1
	FUT0RXD	Input	FTU1	0/1	0	[PJFR5]	0/1	0/1	0/1	1
PJ6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	FUT1TXD	Output	FTU1	0/1	1	[PJFR5]	0/1	0/1	0/1	0
	EI2C3SDA	I/O	FTU1	0/1	1	[PJFR6]	1	0/1	0	1
	I2C3SDA	I/O	FTU1	0/1	1	[PJFR7]	1	0/1	0	1
PJ7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	FUT1RXD	Input	FTU1	0/1	0	[PJFR5]	0/1	0/1	0/1	1
	EI2C3SCL	I/O	FTU1	0/1	1	[PJFR6]	1	0/1	0	1
	I2C3SCL	I/O	FTU1	0/1	1	[PJFR7]	1	0/1	0	1

4.2.11. PORT K

Table 4.12 Port K Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PKDATA]	[PKCR]	[PKFRn]	[PKOD]	[PKPUP]	[PKPDN]	[PKIE]
PK0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT10a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	ISDAOUT	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
	T32A00INA0	Input	FTU1	0/1	0	[PKFR2]	0/1	0/1	0/1	1
	T32A00INC0	Input	FTU1	0/1	0	[PKFR3]	0/1	0/1	0/1	1
	SMI0CS1_N	Output	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	0
PK1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT11a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	ISDBOUT	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
	T32A00INB0	Input	FTU1	0/1	0	[PKFR2]	0/1	0/1	0/1	1
	T32A00INC1	Input	FTU1	0/1	0	[PKFR3]	0/1	0/1	0/1	1
	HDMAREQB	Input	FTU1	0/1	0	[PKFR4]	0/1	0/1	0/1	1
TSPI3CS0	Output	FTU1	0/1	1	[PKFR5]	0/1	0/1	0/1	0	
TSPI3CSIN	Input	FTU1	0/1	0	[PKFR6]	0/1	0/1	0/1	1	
PK2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ECS0_N	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
SMI0D0	I/O	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	1	
PK3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	ECS1_N	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
SMI0D1	I/O	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	1	
PK4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI1CS1	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
	TSPI3TXD	Output	FTU2	0/1	1	[PKFR4]	0/1	0/1	0/1	0
SMI0D2	I/O	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	1	
PK5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI1CS2	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
	TSPI3RXD	Input	FTU1	0/1	0	[PKFR4]	0/1	0/1	0/1	1
SMI0D3	I/O	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	1	
PK6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI1CS3	Output	FTU1	0/1	1	[PKFR1]	0/1	0/1	0/1	0
	T32A01INA0	Input	FTU1	0/1	0	[PKFR2]	0/1	0/1	0/1	1
	T32A01INC0	Input	FTU1	0/1	0	[PKFR3]	0/1	0/1	0/1	1
	TSPI3SCK	Input	FTU1	0/1	0	[PKFR4]	0/1	0/1	0/1	1
		Output	FTU1	0/1	1	[PKFR4]	0/1	0/1	0/1	0
SMI0CLK	Output	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	0	

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PKDATA]	[PKCR]	[PKFRn]	[PKOD]	[PKPUP]	[PKPDN]	[PKIE]
PK7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT00a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A01INB0	Input	FTU1	0/1	0	[PKFR2]	0/1	0/1	0/1	1
	T32A01INC1	Input	FTU1	0/1	0	[PKFR3]	0/1	0/1	0/1	1
	TSPI3CS0	Output	FTU1	0/1	1	[PKFR4]	0/1	0/1	0/1	0
	SMI0CS0_N	Output	FTU2	0/1	1	[PKFR6]	0/1	0/1	0/1	0
	TSPI3CSIN	Input	FTU1	0/1	0	[PKFR7]	0/1	0/1	0/1	1

4.2.12. PORT L

Table 4.13 Port L Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PLDATA]	[PLCR]	[PLFRn]	[PLOD]	[PLPUP]	[PLPDN]	[PLIE]
PL0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT01a	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A02INA0	Input	FTU1	0/1	0	[PLFR2]	0/1	0/1	0/1	1
	T32A02INC0	Input	FTU1	0/1	0	[PLFR3]	0/1	0/1	0/1	1
	SMI0D4	I/O	FTU2	0/1	1	[PLFR5]	0/1	0/1	0/1	1
	TSPI1CSIN	Input	FTU1	0/1	0	[PLFR6]	0/1	0/1	0/1	1
TSPI1CS0	Output	FTU1	0/1	1	[PLFR7]	0/1	0/1	0/1	0	
PL1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	SMI0D5	I/O	FTU2	0/1	1	[PLFR5]	0/1	0/1	0/1	1
	TSPI1SCK	Input Output	FTU1	0/1 0/1	0 1	[PLFR7] [PLFR7]	0/1 0/1	0/1 0/1	0/1 0/1	1 0
PL2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	SMI0D6	I/O	FTU2	0/1	1	[PLFR5]	0/1	0/1	0/1	1
TSPI1RXD	Input	FTU1	0/1	0	[PLFR7]	0/1	0/1	0/1	1	
PL3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A02INB0	Input	FTU1	0/1	0	[PLFR2]	0/1	0/1	0/1	1
	T32A02INC1	Input	FTU1	0/1	0	[PLFR3]	0/1	0/1	0/1	1
	SMI0D7	I/O	FTU2	0/1	1	[PLFR5]	0/1	0/1	0/1	1
	TSPI3CS1	Output	FTU1	0/1	1	[PLFR6]	0/1	0/1	0/1	0
TSPI1TXD	Output	FTU2	0/1	1	[PLFR7]	0/1	0/1	0/1	0	
PL4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT12b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A08OUTA	Output	FTU1	0/1	1	[PLFR2]	0/1	0/1	0/1	0
T32A08OUTC	Output	FTU1	0/1	1	[PLFR3]	0/1	0/1	0/1	0	
PL5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT13b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
T32A08OUTB	Output	FTU1	0/1	1	[PLFR2]	0/1	0/1	0/1	0	
PL6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT03b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A09OUTA	Output	FTU1	0/1	1	[PLFR2]	0/1	0/1	0/1	0
T32A09OUTC	Output	FTU1	0/1	1	[PLFR3]	0/1	0/1	0/1	0	
PL7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TRGIN1	Input	FTU1	0/1	0	[PLFR1]	0/1	0/1	0/1	1
T32A09OUTB	Output	FTU1	0/1	1	[PLFR2]	0/1	0/1	0/1	0	

4.2.13. PORT M

Table 4.14 Port M Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PMDATA]	[PMCR]	[PMFRn]	[PMOD]	[PMPUP]	[PMPDN]	[PMIE]
PM0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C3SDA	I/O	FTU1	0/1	1	[PMFR1]	1	0/1	0	1
	I2C3SDA	I/O	FTU1	0/1	1	[PMFR4]	1	0/1	0	1
	UT4RXD	Input	FTU1	0/1	0	[PMFR5]	0/1	0/1	0/1	1
	TSPI6TXD	Output	FTU2	0/1	1	[PMFR6]	0/1	0/1	0/1	0
	UT4TXDA	Output	FTU1	0/1	1	[PMFR7]	0/1	0/1	0/1	0
PM1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C3SCL	I/O	FTU1	0/1	1	[PMFR1]	1	0/1	0	1
	I2C3SCL	I/O	FTU1	0/1	1	[PMFR4]	1	0/1	0	1
	UT4TXDA	Output	FTU1	0/1	1	[PMFR5]	0/1	0/1	0/1	0
	TSPI6RXD	Input	FTU1	0/1	0	[PMFR6]	0/1	0/1	0/1	1
	UT4RXD	Input	FTU1	0/1	0	[PMFR7]	0/1	0/1	0/1	1
PM2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A11OUTA	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	T32A11OUTC	Output	FTU1	0/1	1	[PMFR3]	0/1	0/1	0/1	0
	UT4RTS_N	Output	FTU1	0/1	1	[PMFR5]	0/1	0/1	0/1	0
	TSPI6SCK	Input	FTU1	0/1	0	[PMFR6]	0/1	0/1	0/1	1
	UT4CTS_N	Input	FTU1	0/1	0	[PMFR7]	0/1	0/1	0/1	1
PM3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT14b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A11OUTB	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	TSPI6CSIN	Input	FTU1	0/1	0	[PMFR4]	0/1	0/1	0/1	1
	UT4CTS_N	Input	FTU1	0/1	0	[PMFR5]	0/1	0/1	0/1	1
	TSPI6CS0	Output	FTU1	0/1	1	[PMFR6]	0/1	0/1	0/1	0
UT4RTS_N	Output	FTU1	0/1	1	[PMFR7]	0/1	0/1	0/1	0	
PM4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT15b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A06OUTB	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	TSPI7CSIN	Input	FTU1	0/1	0	[PMFR4]	0/1	0/1	0/1	1
	TSPI7CS0	Output	FTU1	0/1	1	[PMFR6]	0/1	0/1	0/1	0
	FUT1CTS_N	Input	FTU1	0/1	0	[PMFR7]	0/1	0/1	0/1	1
PM5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A06OUTA	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	T32A06OUTC	Output	FTU1	0/1	1	[PMFR3]	0/1	0/1	0/1	0
	TSPI7SCK	Input	FTU1	0/1	0	[PMFR6]	0/1	0/1	0/1	1
		Output	FTU1	0/1	1	[PMFR6]	0/1	0/1	0/1	0
	FUT1RTS_N	Output	FTU1	0/1	1	[PMFR7]	0/1	0/1	0/1	0

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PMDATA]	[PMCR]	[PMFRn]	[PMOD]	[PMPUP]	[PMPDN]	[PMIE]
PM6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C4SDA	I/O	FTU1	0/1	1	[PMFR1]	1	0/1	0	1
	T32A07OUTA	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	T32A07OUTC	Output	FTU1	0/1	1	[PMFR3]	0/1	0/1	0/1	0
	I2C4SDA	I/O	FTU1	0/1	1	[PMFR4]	1	0/1	0	1
	FUT11RIN	Input	FTU1	0/1	0	[PMFR5]	0/1	0/1	0/1	1
	TSPI7RXD	Input	FTU1	0/1	0	[PMFR6]	0/1	0/1	0/1	1
FUT1RXD	Input	FTU1	0/1	0	[PMFR7]	0/1	0/1	0/1	1	
PM7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C4SCL	I/O	FTU1	0/1	1	[PMFR1]	1	0/1	0	1
	T32A07OUTB	Output	FTU1	0/1	1	[PMFR2]	0/1	0/1	0/1	0
	I2C4SCL	I/O	FTU1	0/1	1	[PMFR4]	1	0/1	0	1
	FUT11ROUT	Output	FTU1	0/1	1	[PMFR5]	0/1	0/1	0/1	0
	TSPI7TXD	Output	FTU2	0/1	1	[PMFR6]	0/1	0/1	0/1	0
	FUT1TXD	Output	FTU1	0/1	1	[PMFR7]	0/1	0/1	0/1	0

4.2.14. PORT N

Table 4.15 Port N Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PNDA]T	[PNCR]	[PNFRn]	[PNOD]	[PNPUP]	[PNPDN]	[PNIE]
PN0	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA00 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN1	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA01 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN2	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA02 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN3	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA03 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN4	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA04 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN5	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA05 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN6	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA06 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0
PN7	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	AINA07 (Note)	Input	FTU5	0/1	0	N/A	0/1	0	0	0

Note: When using analog input (AINAx), [PNCR] should be output disable "0", [PNIE] should be input disable "0", [PNPUP] should be pull-up disable "0" and [PNPDN] should be pull-down disable "0".

4.2.15. PORT P

Table 4.16 Port P Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PPDATA]	[PPCR]	[PPFRn]	[PPOD]	[PPPUP]	[PPPDN]	[PPIE]
PP0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA08 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A04INA0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A04INC0	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A04INB1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA09 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A04INB0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A04INC1	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A04INA1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA10 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A05INA0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A05INC0	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A05INB1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA11 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A05INB0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A05INC1	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A05INA1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA12 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A06INA0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A06INC0	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A06INB1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA13 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A06INB0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A06INC1	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A06INA1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1
PP6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA14 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	INT10b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A07INA0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A07INC0	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
T32A07INB1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1	

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PPDATA]	[PPCR]	[PPFRn]	[PPOD]	[PPPUP]	[PPPDN]	[PPIE]
PP7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA15 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	INT11b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A07INB0	Input	FTU1	0/1	0	[PPFR2]	0/1	0/1	0/1	1
	T32A07INC1	Input	FTU1	0/1	0	[PPFR3]	0/1	0/1	0/1	1
	T32A07INA1	Input	FTU1	0/1	0	[PPFR5]	0/1	0/1	0/1	1

Note: When using analog input (AINAx), [PPCR] should be output disable "0", [PPIE] should be input disable "0", [PPPUP] should be pull-up disable "0" and [PPPDN] should be pull-down disable "0".

4.2.16. PORT R

Table 4.17 Port R Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PRDATA]	[PRCR]	[PRFRn]	[PROD]	[PRPUP]	[PRPDN]	[PRIE]
PR0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA16 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A08INA0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A08INC0	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA17 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A08INB0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A08INC1	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA18 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A09INA0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A09INC0	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA19 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A09INB0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A09INC1	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA20 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A10INA0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A10INC0	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA21 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A10INB0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A10INC1	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA22 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A11INA0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A11INC0	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1
PR7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	AINA23 (Note)	Input	FTU5	0/1	0	0	0/1	0	0	0
	T32A11INB0	Input	FTU1	0/1	0	[PRFR2]	0/1	0/1	0/1	1
	T32A11INC1	Input	FTU1	0/1	0	[PRFR3]	0/1	0/1	0/1	1

Note: When using analog input (AINAx), [PRCR] should be output disable "0", [PRIE] should be input disable "0", [PRPUP] should be pull-up disable "0" and [PRPDN] should be pull-down disable "0".

4.2.17. PORT T

Table 4.18 Port T Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PTDATA]	[PTCR]	[PTFRn]	[PTOD]	[PTPUP]	[PTPDN]	[PTIE]
PT0	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	DAC0 (Note2)	Output	FTU13	0/1	0	N/A	0/1	0	0	0
PT1	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	DAC1 (Note2)	Output	FTU13	0/1	0	N/A	0/1	0	0	0
PT2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	CEC0	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
I/O		0/1		1	[PTFR7]	0/1	0/1	0/1	1	
PT3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT00b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	RTCOU	Output	FTU1	0/1	1	[PTFR1]	0/1	0/1	0/1	0
	T32A03OUTA	Output	FTU1	0/1	1	[PTFR2]	0/1	0/1	0/1	0
	T32A03OUTC	Output	FTU1	0/1	1	[PTFR3]	0/1	0/1	0/1	0
	RXIN0	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
TRGIN2	Input	FTU1	0/1	0	[PTFR6]	0/1	0/1	0/1	1	
PT4	After reset			0	0	N/A	0	0	0	0
	Input Port	Input		0/1	0	N/A	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	N/A	0/1	0/1	0/1	0
	INT01b	Input	FTU4	0/1	0	N/A	0/1	0/1	0/1	1
RXIN1	Input	FTU15	0/1	0	N/A	0/1	0/1	0/1	1	
PT5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT02b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
T32A03OUTB	Output	FTU1	0/1	1	[PTFR2]	0/1	0/1	0/1	0	

Note1: N/A: Not Available

Note2: When using analog output, [PTCR] should be output disable "0", [PTIE] should be input disable "0", [PTPUP] should be pull-up disable "0" and [PTPDN] should be pull-down disable "0".

4.2.18. PORT U

Table 4.19 Port U Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PUDATA]	[PUCR]	[PUFRn]	[PUOD]	[PUPUP]	[PUPDN]	[PUIE]
PU0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A12OUTA	Output	FTU1	0/1	1	[PUFR2]	0/1	0/1	0/1	0
	T32A12OUTC	Output	FTU1	0/1	1	[PUFR3]	0/1	0/1	0/1	0
	UT4TXDA	Output	FTU1	0/1	1	[PUFR7]	0/1	0/1	0/1	0
PU1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A12OUTB	Output	FTU1	0/1	1	[PUFR2]	0/1	0/1	0/1	0
	UT4RXD	Input	FTU1	0/1	0	[PUFR7]	0/1	0/1	0/1	1
PU2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT06b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A12INA0	Input	FTU1	0/1	0	[PUFR2]	0/1	0/1	0/1	1
	T32A12INC0	Input	FTU1	0/1	0	[PUFR3]	0/1	0/1	0/1	1
	TSSI1TCK	Input	FTU2	0/1	0	[PUFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PUFR6]	0/1	0/1	0/1	0
UT4CTS_N	Input	FTU1	0/1	0	[PUFR7]	0/1	0/1	0/1	1	
PU3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT07b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A12INB0	Input	FTU1	0/1	0	[PUFR2]	0/1	0/1	0/1	1
	T32A12INC1	Input	FTU1	0/1	0	[PUFR3]	0/1	0/1	0/1	1
	TSSI1TFS	Input	FTU2	0/1	0	[PUFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PUFR6]	0/1	0/1	0/1	0
UT4RTS_N	Output	FTU1	0/1	1	[PUFR7]	0/1	0/1	0/1	0	
PU4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT08b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A13INB0	Input	FTU1	0/1	0	[PUFR2]	0/1	0/1	0/1	1
	T32A13INC1	Input	FTU1	0/1	0	[PUFR3]	0/1	0/1	0/1	1
	TSSI1TXD	Output	FTU2	0/1	1	[PUFR6]	0/1	0/1	0/1	0
	UT3RTS_N	Output	FTU1	0/1	1	[PUFR7]	0/1	0/1	0/1	0
PU5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	INT09b	Input	FTU4	0/1	0	0	0/1	0/1	0/1	1
	T32A13INA0	Input	FTU1	0/1	0	[PUFR2]	0/1	0/1	0/1	1
	T32A13INC0	Input	FTU1	0/1	0	[PUFR3]	0/1	0/1	0/1	1
	TSSI1RXD	Input	FTU1	0/1	0	[PUFR6]	0/1	0/1	0/1	1
	UT3CTS_N	Input	FTU1	0/1	0	[PUFR7]	0/1	0/1	0/1	1

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PUDATA]	[PUCR]	[PUFRn]	[PUOD]	[PUPUP]	[PUPDN]	[PUIE]
PU6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A13OUTA	Output	FTU1	0/1	1	[PUFR2]	0/1	0/1	0/1	0
	T32A13OUTC	Output	FTU1	0/1	1	[PUFR3]	0/1	0/1	0/1	0
	TSSI1RFS	Input	FTU2	0/1	0	[PUFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PUFR6]	0/1	0/1	0/1	0
UT3RXD	Input	FTU1	0/1	0	[PUFR7]	0/1	0/1	0/1	1	
PU7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A13OUTB	Output	FTU1	0/1	1	[PUFR2]	0/1	0/1	0/1	0
	TSSI1RCK	Input	FTU2	0/1	0	[PUFR6]	0/1	0/1	0/1	1
		Output		0/1	1	[PUFR6]	0/1	0/1	0/1	0
	UT3TXDA	Output	FTU1	0/1	1	[PUFR7]	0/1	0/1	0/1	0

4.2.19. PORT V

Table 4.20 Port V Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PVDATA]	[PVCR]	[PVFRn]	[PVOD]	[PVPUP]	[PVPDN]	[PVIE]
PV0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A09INA0	Input	FTU1	0/1	0	[PVFR2]	0/1	0/1	0/1	1
	T32A09INC0	Input	FTU1	0/1	0	[PVFR3]	0/1	0/1	0/1	1
	ISDBIN0	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	UO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	UT3RXD	Input	FTU1	0/1	0	[PVFR6]	0/1	0/1	0/1	1
UT3TXDA	Output	FTU1	0/1	1	[PVFR7]	0/1	0/1	0/1	0	
PV1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A09INB0	Input	FTU1	0/1	0	[PVFR2]	0/1	0/1	0/1	1
	T32A09INC1	Input	FTU1	0/1	0	[PVFR3]	0/1	0/1	0/1	1
	ISDBIN1	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	XO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	UT3TXDA	Output	FTU1	0/1	1	[PVFR6]	0/1	0/1	0/1	0
UT3RXD	Input	FTU1	0/1	0	[PVFR7]	0/1	0/1	0/1	1	
PV2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A09OUTA	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	T32A09OUTC	Output	FTU1	0/1	1	[PVFR3]	0/1	0/1	0/1	0
	ISDBIN2	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	VO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	UT3RTS_N	Output	FTU1	0/1	1	[PVFR6]	0/1	0/1	0/1	0
UT3CTS_N	Input	FTU1	0/1	0	[PVFR7]	0/1	0/1	0/1	1	
PV3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A09OUTB	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	ISDBIN3	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	YO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	UT3CTS_N	Input	FTU1	0/1	0	[PVFR6]	0/1	0/1	0/1	1
	UT3RTS_N	Output	FTU1	0/1	1	[PVFR7]	0/1	0/1	0/1	0
PV4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C2SCL	I/O	FTU1	0/1	1	[PVFR1]	1	0/1	0	1
	T32A04OUTB	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	TSPI5RXD	Input	FTU1	0/1	0	[PVFR4]	0/1	0/1	0/1	1
	WO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	I2C2SCL	I/O	FTU1	0/1	1	[PVFR6]	1	0/1	0	1
UT1RXD	Input	FTU1	0/1	0	[PVFR7]	0/1	0/1	0/1	1	

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PVDATA]	[PVCR]	[PVFRn]	[PVOD]	[PVPUP]	[PVPDN]	[PVIE]
PV5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	EI2C2SDA	I/O	FTU1	0/1	1	[PVFR1]	1	0/1	0	1
	T32A04OUTA	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	T32A04OUTC	Output	FTU1	0/1	1	[PVFR3]	0/1	0/1	0/1	0
	TSPI5TXD	Output	FTU2	0/1	1	[PVFR4]	0/1	0/1	0/1	0
	ZO0	Output	FTU2	0/1	1	[PVFR5]	0/1	0/1	0/1	0
	I2C2SDA	I/O	FTU1	0/1	1	[PVFR6]	1	0/1	0	1
UT1TXDA	Output	FTU1	0/1	1	[PVFR7]	0/1	0/1	0/1	0	
PV6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A05OUTA	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	T32A05OUTC	Output	FTU1	0/1	1	[PVFR3]	0/1	0/1	0/1	0
	TSPI5SCK	Input	FTU1	0/1	0	[PVFR4]	0/1	0/1	0/1	1
		Output	FTU1	0/1	1	[PVFR4]	0/1	0/1	0/1	0
	EMG0	Input	FTU1	0/1	0	[PVFR5]	0/1	0/1	0/1	1
UT1CTS_N	Input	FTU1	0/1	0	[PVFR7]	0/1	0/1	0/1	1	
PV7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A05OUTB	Output	FTU1	0/1	1	[PVFR2]	0/1	0/1	0/1	0
	TSPI5CS0	Output	FTU1	0/1	1	[PVFR4]	0/1	0/1	0/1	0
	OVV0	Input	FTU1	0/1	0	[PVFR5]	0/1	0/1	0/1	1
	TSPI5CSIN	Input	FTU1	0/1	0	[PVFR6]	0/1	0/1	0/1	1
	UT1RTS_N	Output	FTU1	0/1	1	[PVFR7]	0/1	0/1	0/1	0

4.2.20. PORT W

Table 4.21 Port W Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PWDATA]	[PWCR]	[PWFRn]	[PWOD]	[PWPUP]	[PWPDN]	[PWIE]
PW0	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI8CS0	Output	FTU1	0/1	1	[PWFR4]	0/1	0/1	0/1	0
	T32A00OUTB	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	TSPI8CSIN	Input	FTU1	0/1	0	[PWFR6]	0/1	0/1	0/1	1
PW1	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI8SCK	Input	FTU1	0/1	0	[PWFR4]	0/1	0/1	0/1	1
		Output		0/1	1	[PWFR4]	0/1	0/1	0/1	0
	T32A00OUTA	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
T32A00OUTC	Output	FTU1	0/1	1	[PWFR7]	0/1	0/1	0/1	0	
PW2	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI8RXD	Input	FTU1	0/1	0	[PWFR4]	0/1	0/1	0/1	1
	T32A01OUTA	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	T32A01OUTC	Output	FTU1	0/1	1	[PWFR7]	0/1	0/1	0/1	0
PW3	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	TSPI8TXD	Output	FTU2	0/1	1	[PWFR4]	0/1	0/1	0/1	0
	T32A01OUTB	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
PW4	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A11INA1	Input	FTU1	0/1	0	[PWFR3]	0/1	0/1	0/1	1
	T32A10OUTB	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	ISDCIN0	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
T32A10INA0	Input	FTU1	0/1	0	[PWFR7]	0/1	0/1	0/1	1	
PW5	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A10OUTA	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	ISDCIN1	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	T32A10OUTC	Output	FTU1	0/1	1	[PWFR7]	0/1	0/1	0/1	0
PW6	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A11OUTA	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	ISDCIN2	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	T32A11OUTC	Output	FTU1	0/1	1	[PWFR7]	0/1	0/1	0/1	0
PW7	After reset			0	0	0	0	0	0	0
	Input Port	Input		0/1	0	0	0/1	0/1	0/1	1
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	0
	T32A10INA1	Input	FTU1	0/1	0	[PWFR3]	0/1	0/1	0/1	1
	T32A11OUTB	Output	FTU1	0/1	1	[PWFR5]	0/1	0/1	0/1	0
	ISDCIN3	Input	FTU15	0/1	0	0	0/1	0/1	0/1	1
	T32A11INA0	Input	FTU1	0/1	0	[PWFR7]	0/1	0/1	0/1	1

4.2.21. PORT Y

Table 4.22 Port Y Register Settings

PORT	Reset status	Input/output	PORT type	Control register						
	Function			[PYDATA]	[PYCR]	[PYFRn]	[PYOD]	[PYPUP]	[PYPDN]	[PYIE]
PY0	After reset			0	N/A	N/A	N/A	0	0	0
	Input Port	Input		0/1	N/A	N/A	N/A	0/1	0/1	1
	X1	Input	FTU10	0/1	N/A	N/A	N/A	0	0	0
	EHCLKIN	Input	FTU10	0/1	N/A	N/A	N/A	0	0	0/1
PY1	After reset			0	N/A	N/A	N/A	0	0	0
	Input Port	Input		0/1	N/A	N/A	N/A	0/1	0/1	1
	X2	Output	FTU10	0/1	N/A	N/A	N/A	0	0	0
PY2	After reset			0	N/A	N/A	N/A	0	0	0
	Input Port	Input		0/1	N/A	N/A	N/A	0/1	0/1	1
	XT1	Input	FTU10b	0/1	N/A	N/A	N/A	0	0	0
	ELCLKIN	Input	FTU10b	0/1	N/A	N/A	N/A	0	0	1
PY3	After reset			0	N/A	N/A	N/A	0	0	0
	Input Port	Input		0/1	N/A	N/A	N/A	0/1	0/1	1
	XT2	Output	FTU10b	0/1	N/A	N/A	N/A	0	0	0
PY4	During reset (BOOT_N)	Input	FTU6	0	0	0	0	0 (Note2)	0	N/A
	After reset			0	0	0	0	0	0	N/A
	Output Port	Output		0/1	1	0	0/1	0/1	0/1	N/A
	ISDCOUT	Output	FTU1	0/1	1	[PYFR1]	0/1	0/1	0/1	N/A
	EEXBCLK	Output	FTU1	0/1	1	[PYFR4]	0/1	0/1	0/1	N/A

Note1: N/A: Not Available

Note2: During the reset period by the reset pin (RESET_N) or POR, the state of the BOOT_N pin can be input to PY4 with pull-up enabled and input enabled.

5. Block Diagrams of Ports

The port has some types of circuits, FTU1 to FTU6, FTU10, FTU10b and FTU13 to FTU15. Each circuit diagram is shown in the following page and after. The dot line block shows an equivalent circuit which is described in "Datasheet".

The "I/O Reset" shown in the circuit diagram is a signal from the power-on reset (POR) or the reset pin (RESET_N). Although, "I/O Reset" of debug pins (TMS/SWDIO, TDI, TDO/SWV, TCK/SWCLK, TRST_N) is the power-on reset (POR) and PORF reset.

5.1. Type FTU1

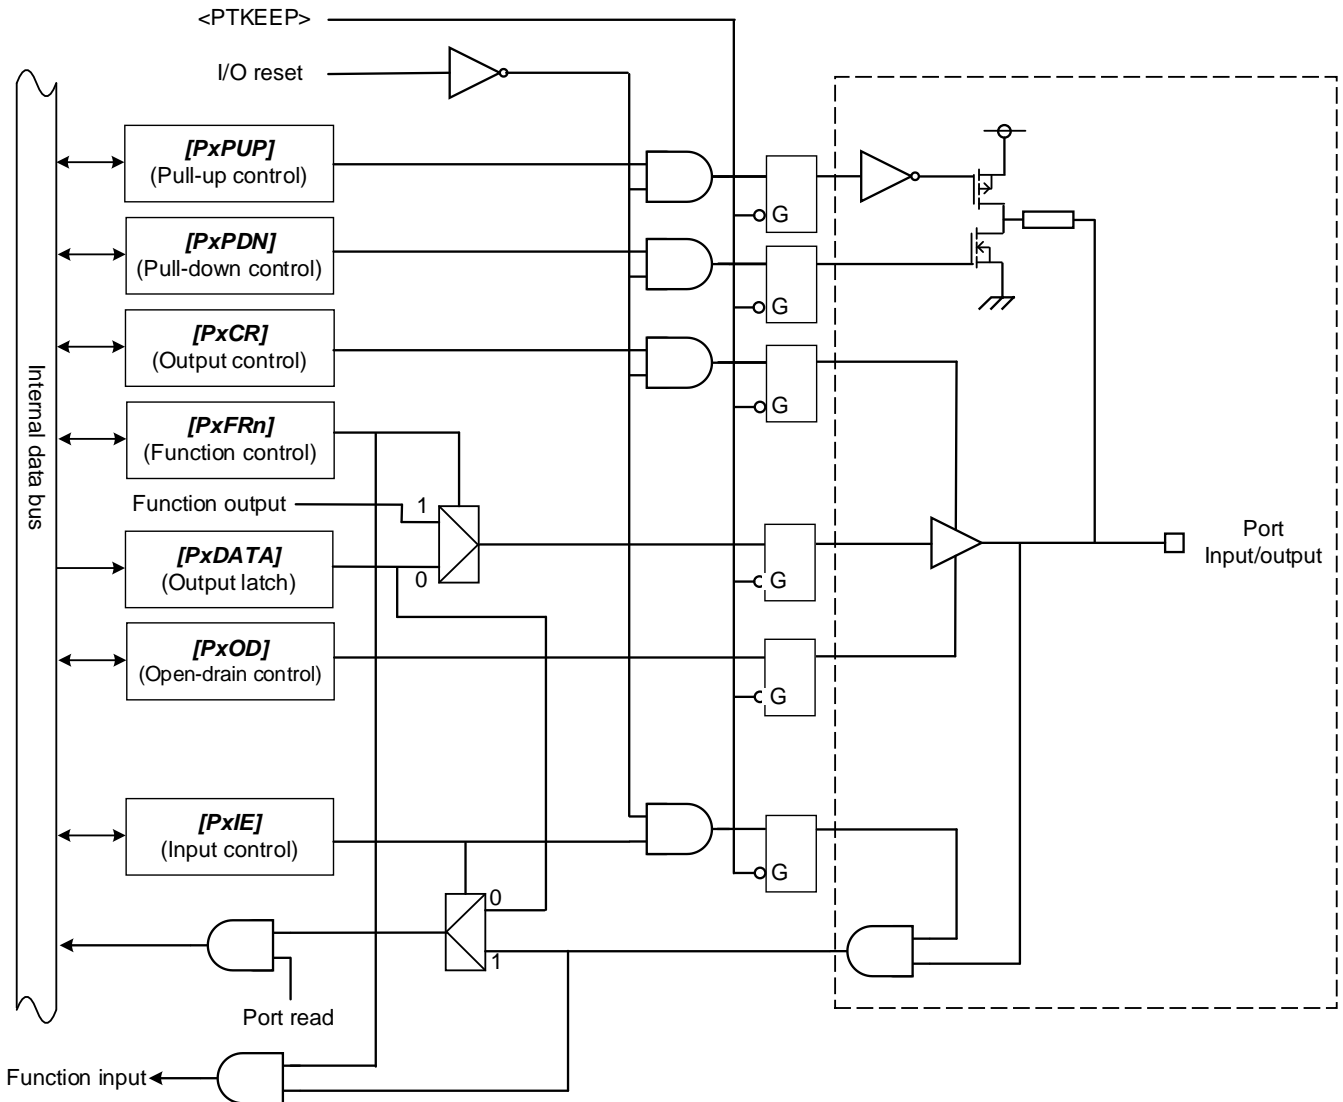


Figure 5.1 Port Type FTU1

5.2. Type FTU2

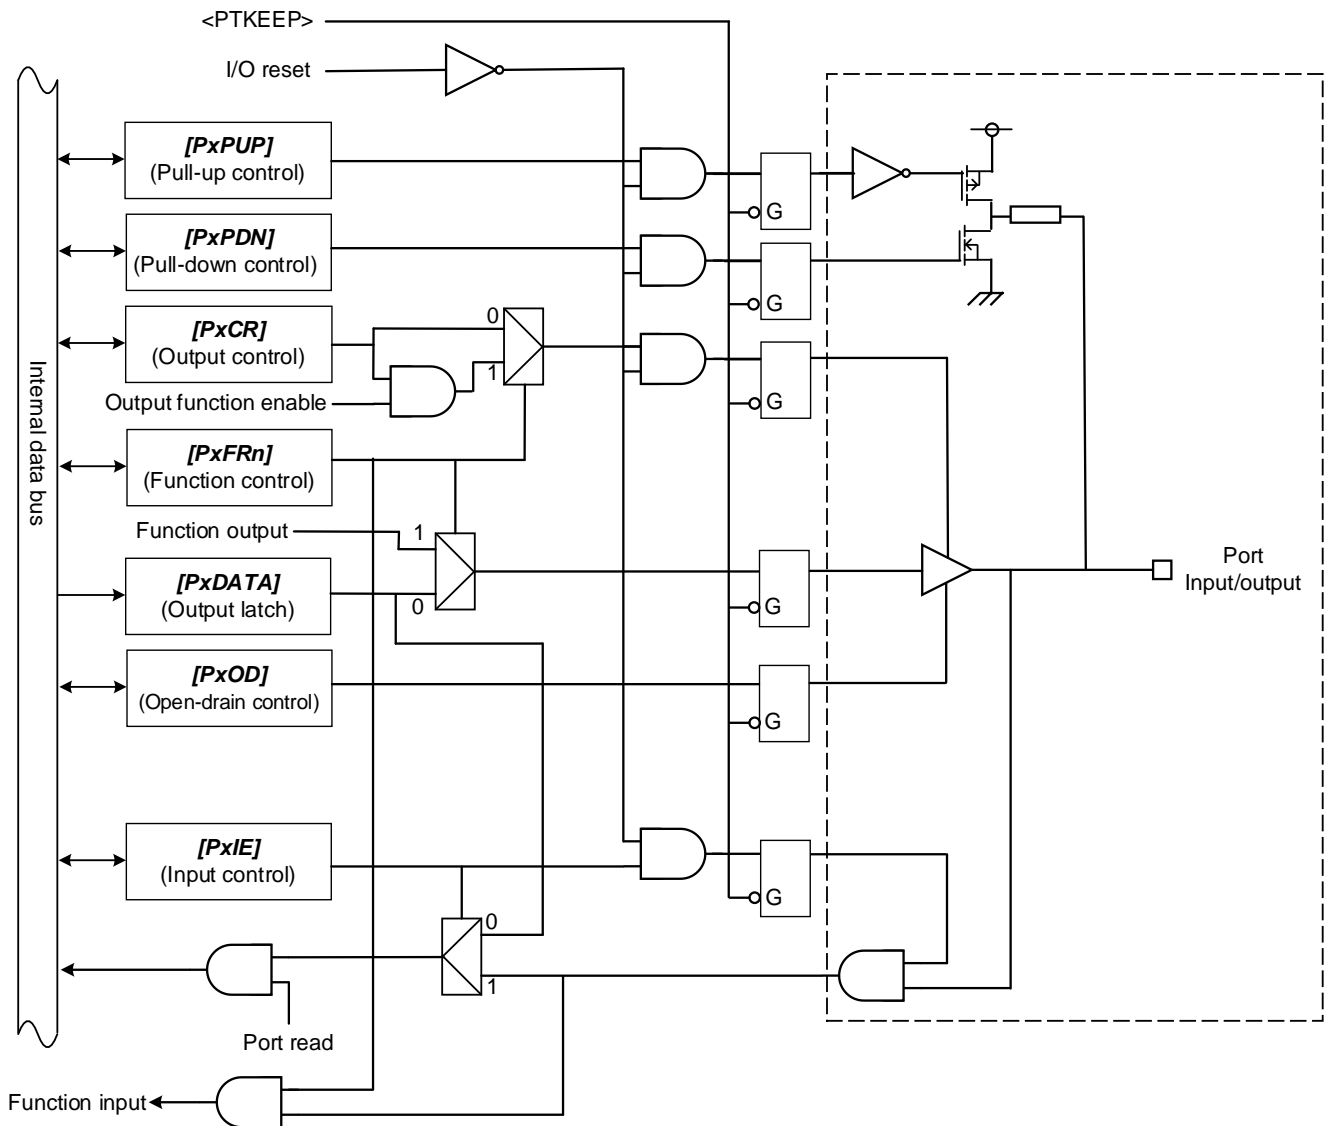


Figure 5.2 Port Type FTU2

5.3. Type FTU2b

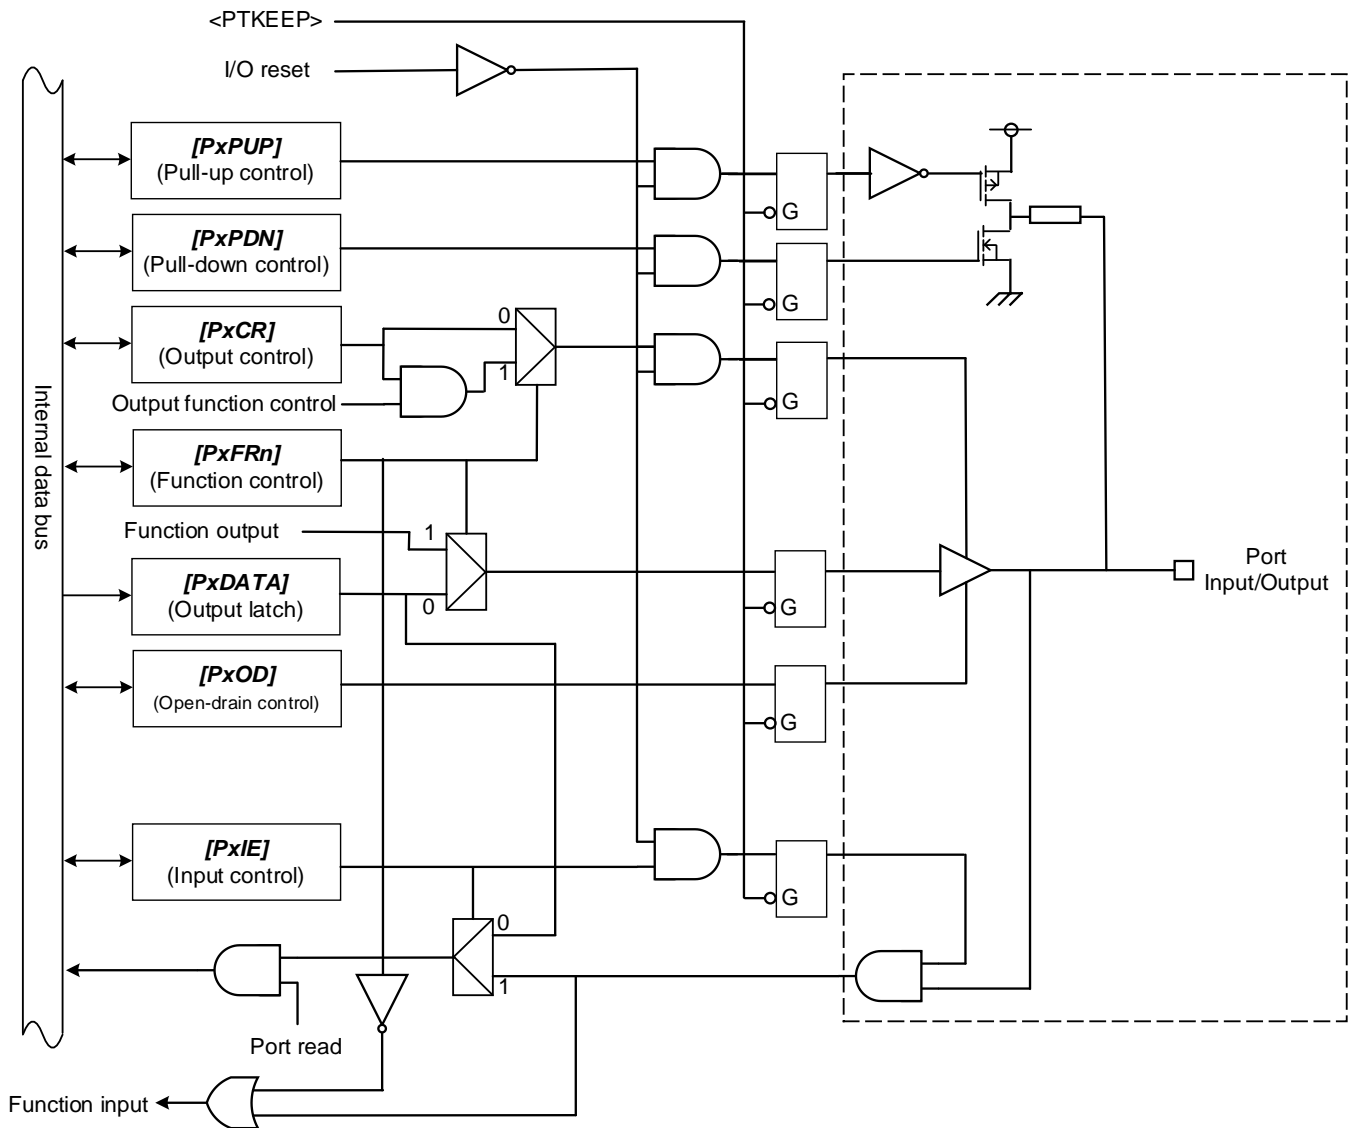


Figure 5.3 Port Type FTU2b

5.4. Type FTU3

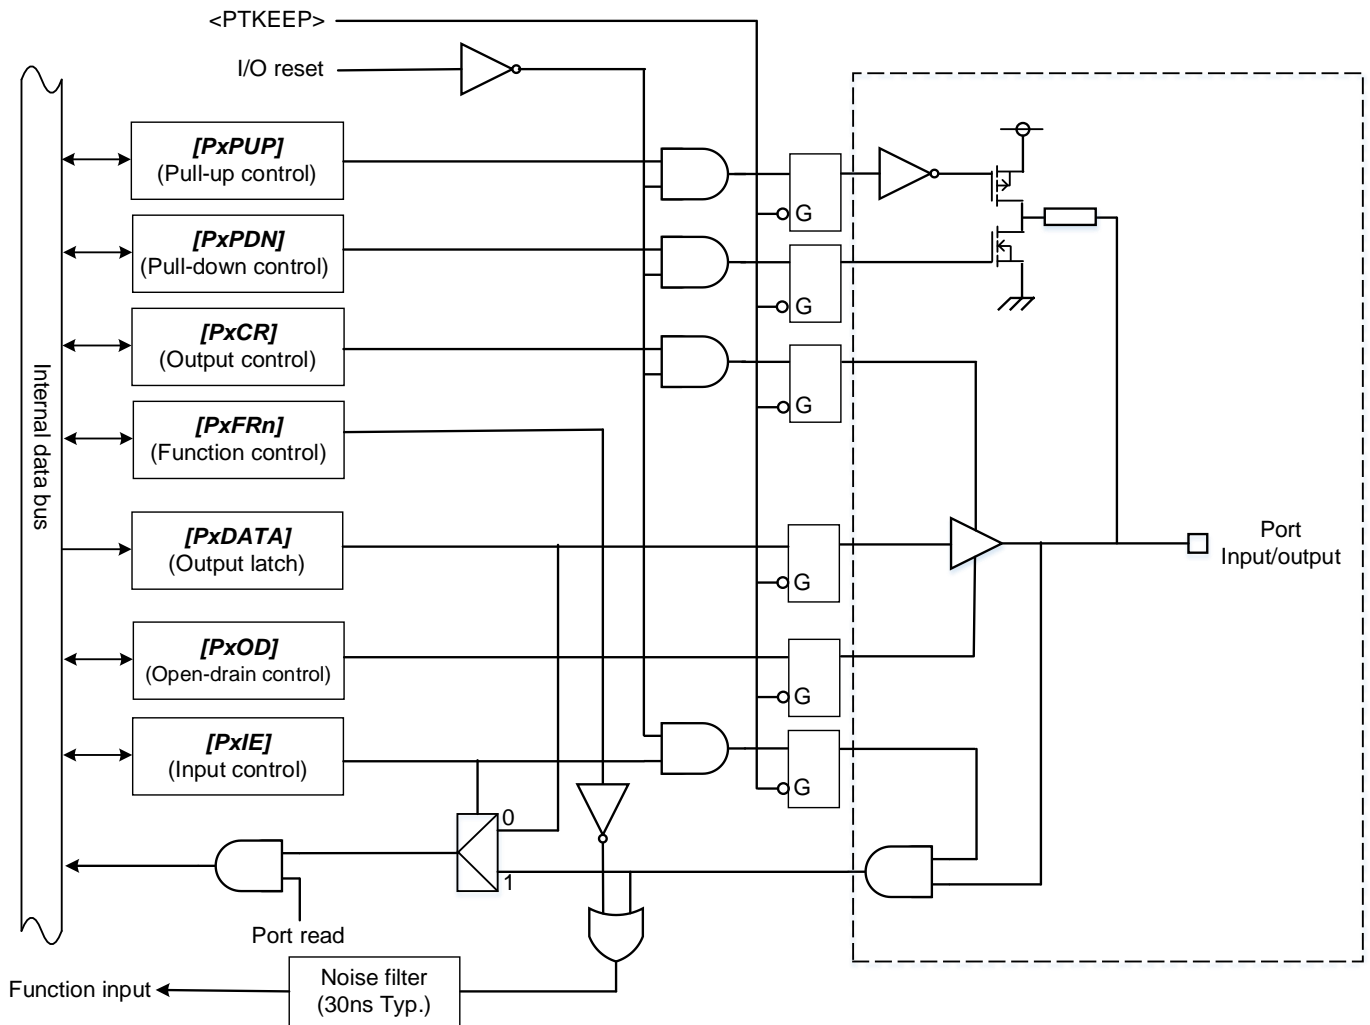


Figure 5.4 Port Type FTU3

Note: There is no noise filter for NBDCLK and NBDSYNC pins.

5.5. Type FTU4

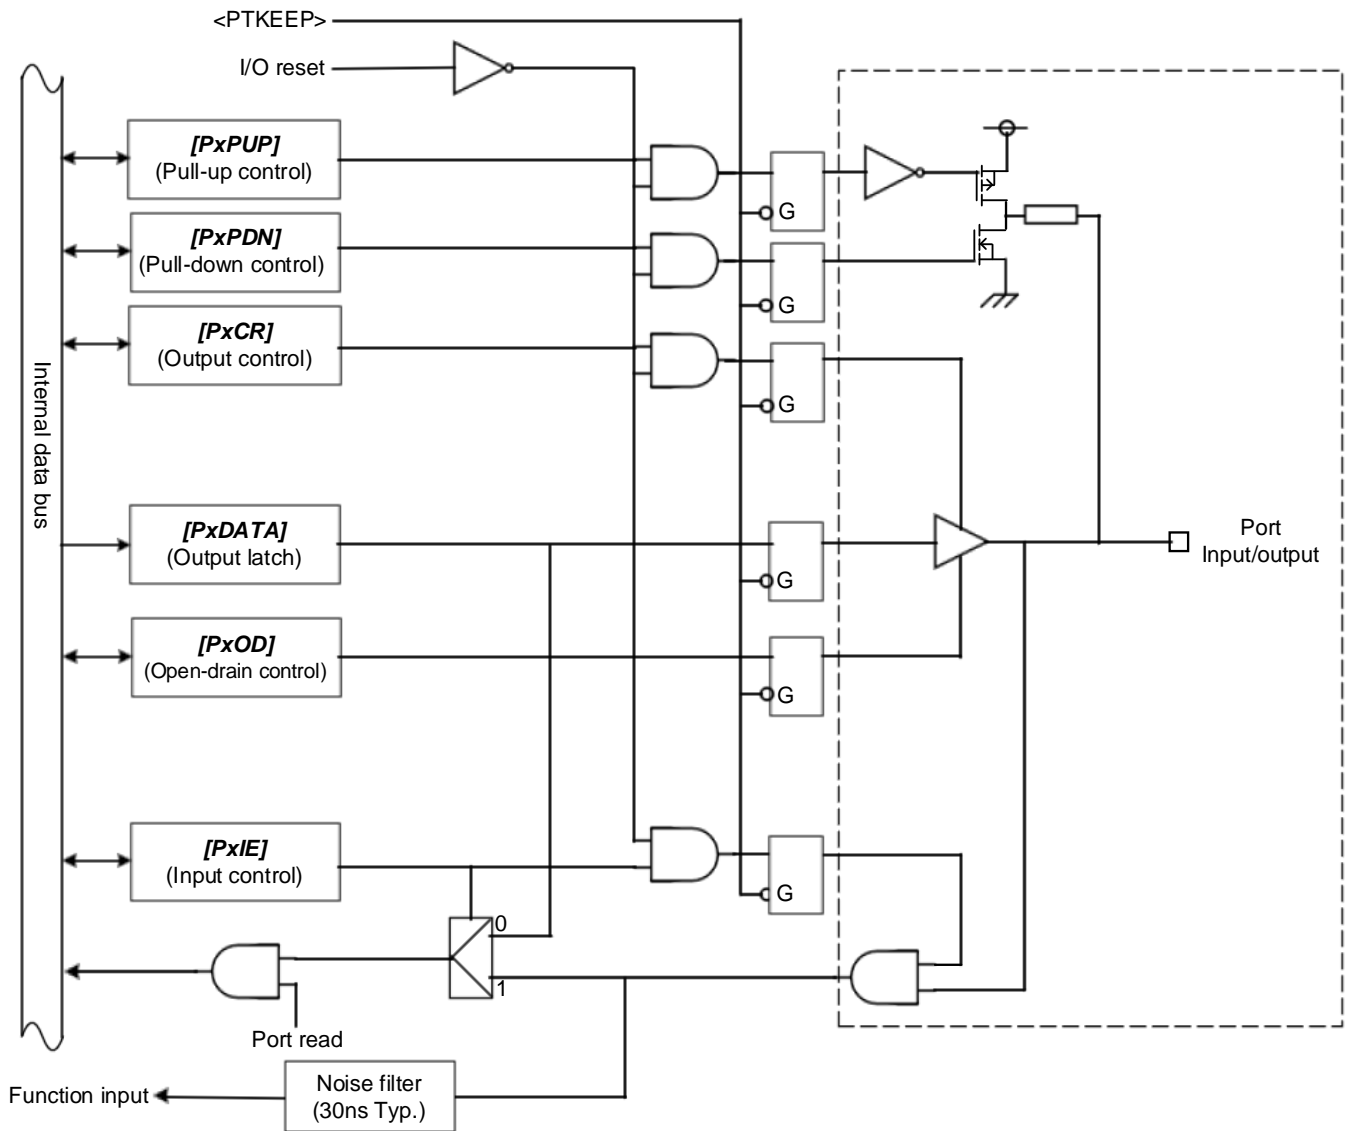


Figure 5.5 Port Type FTU4

5.6. Type FTU5

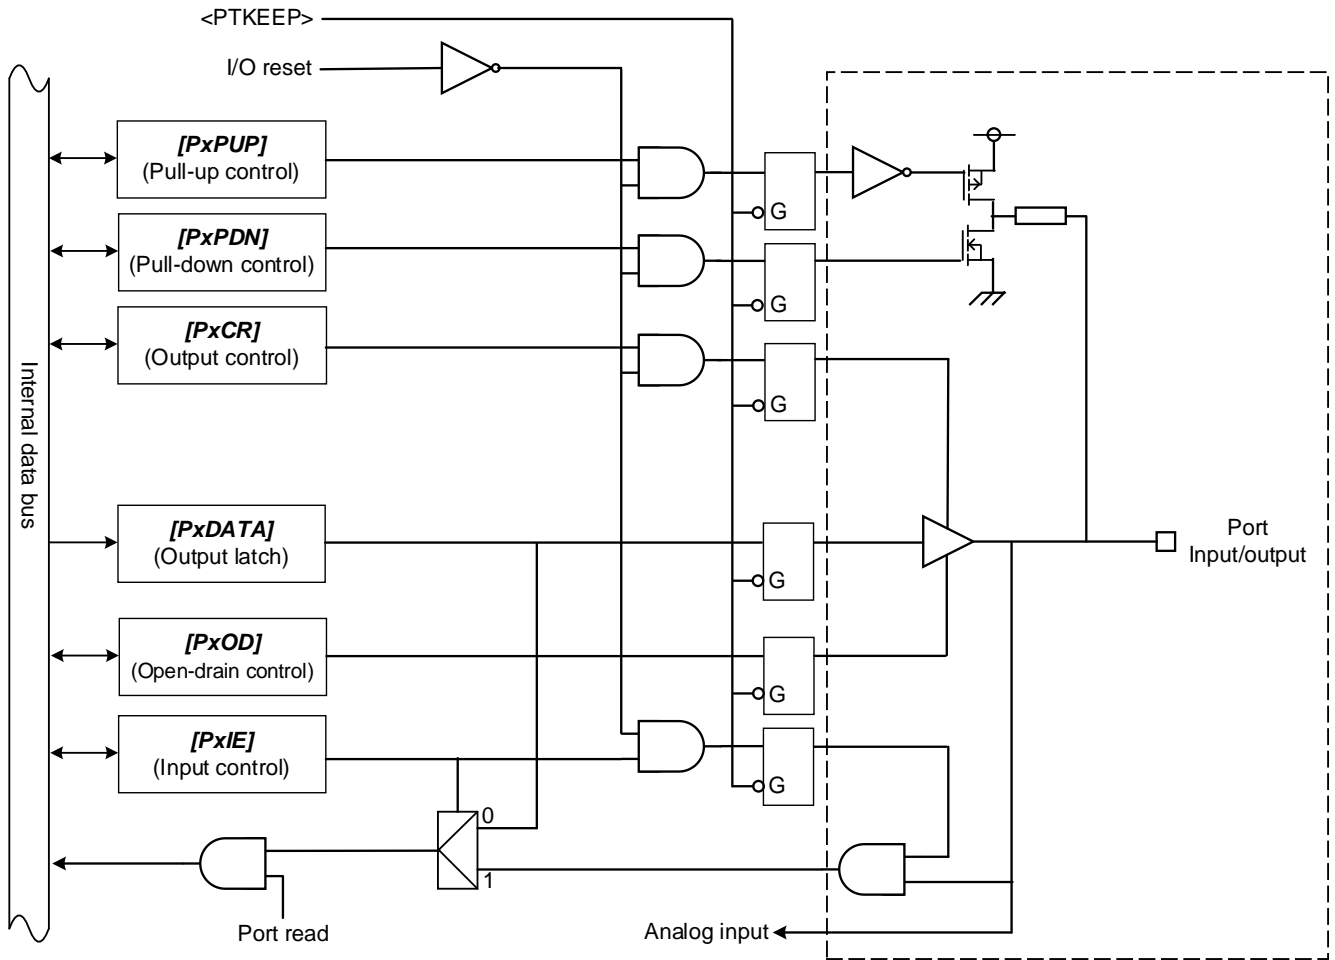


Figure 5.6 Port Type FTU5

5.7. Type FTU6

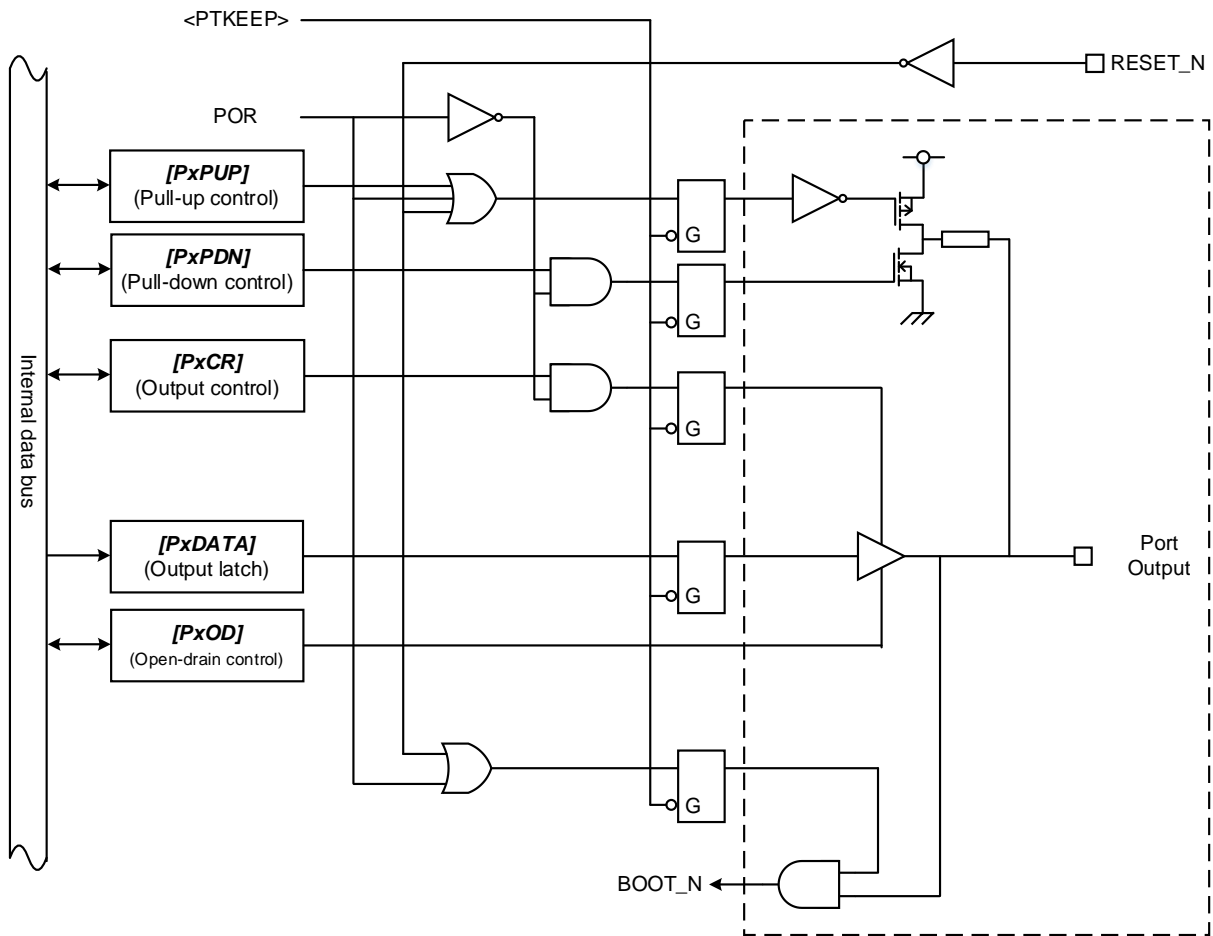


Figure 5.7 Port Type FTU6

5.8. Type FTU10

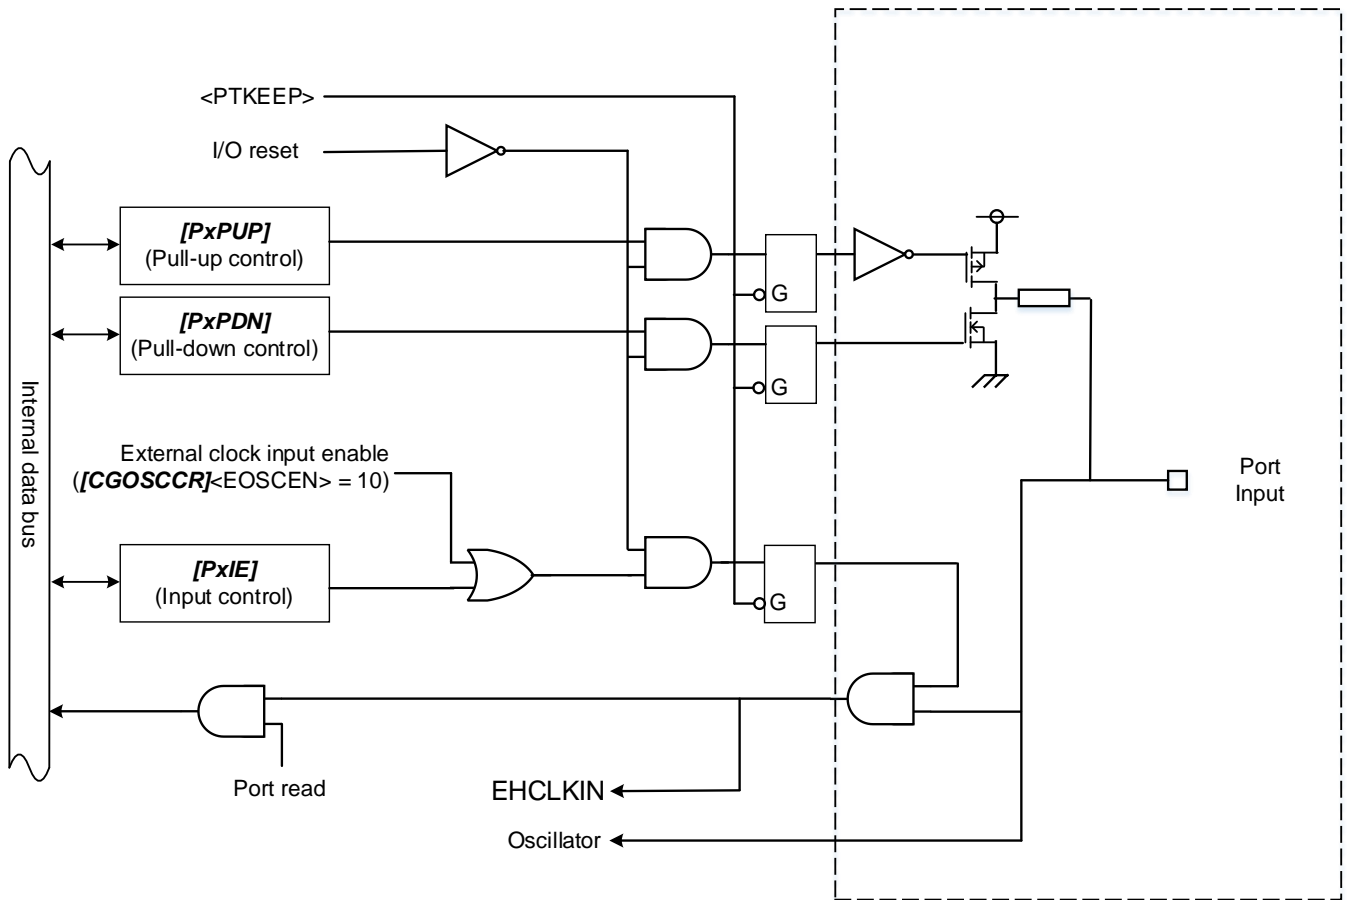


Figure 5.8 Port Type FTU10

5.9. Type FTU10b

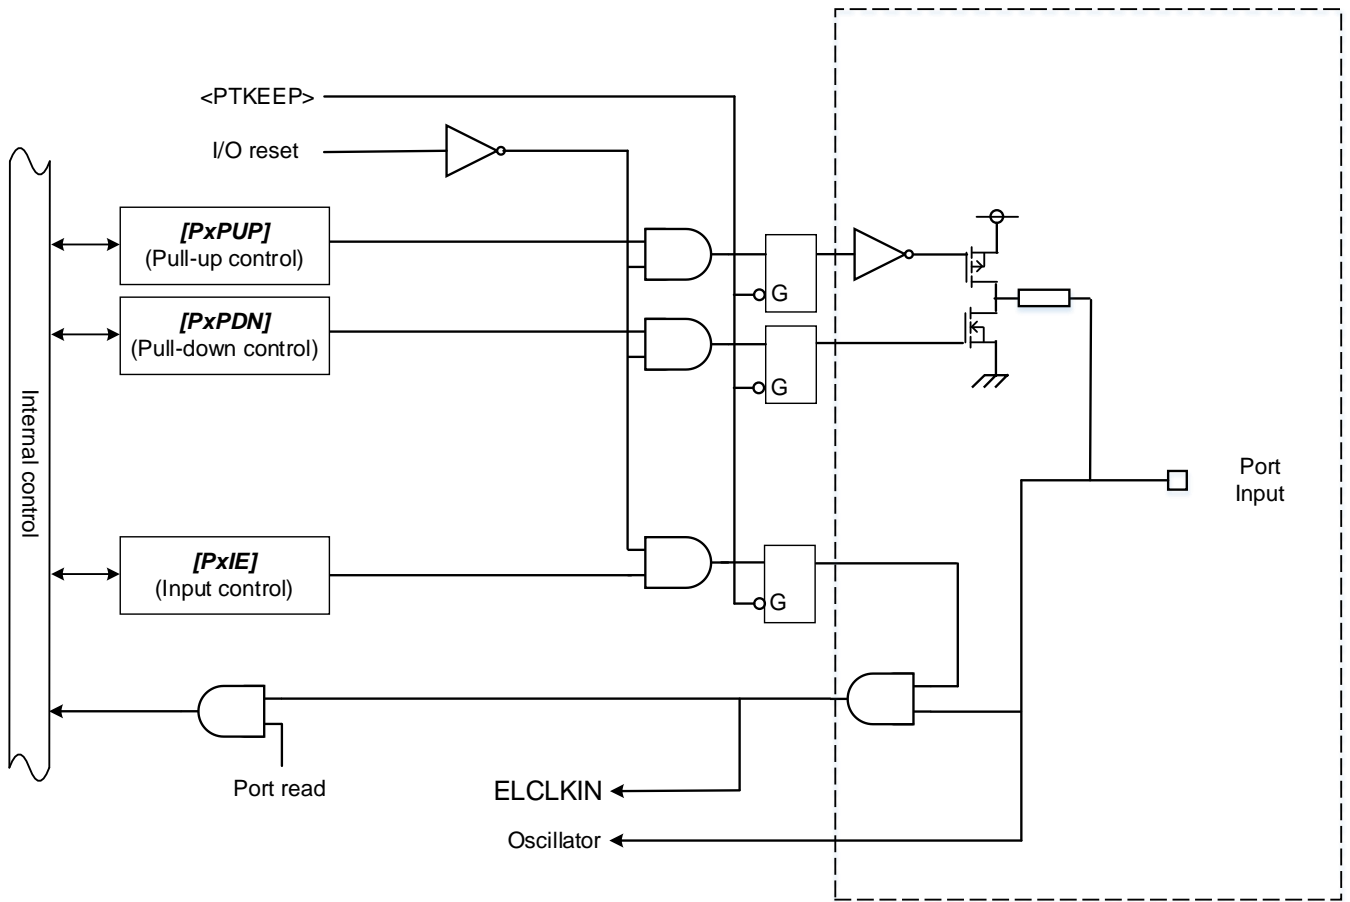


Figure 5.9 Port Type FTU10b

5.10. Type FTU13

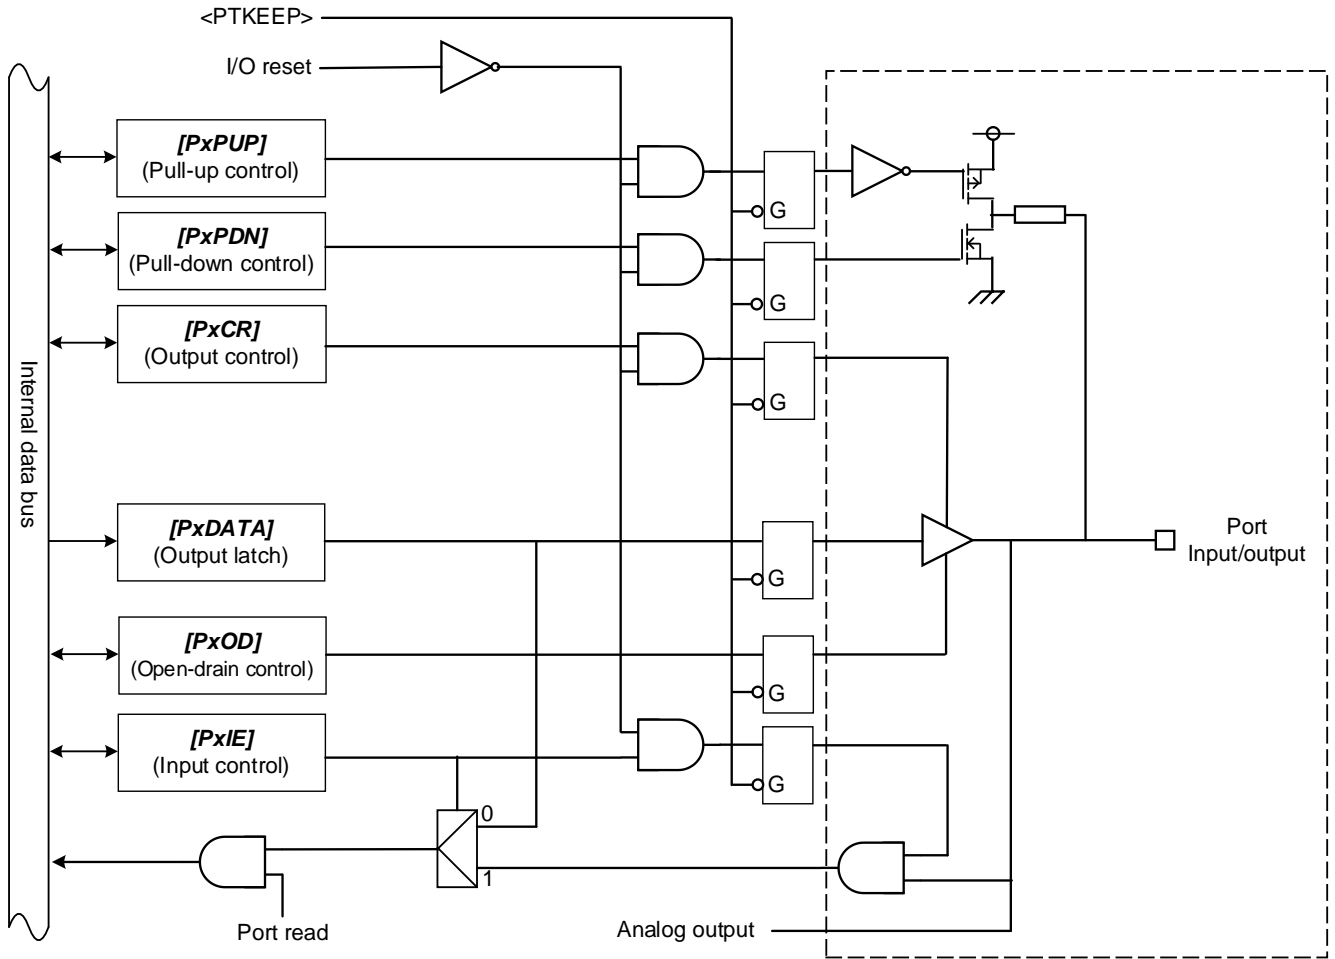


Figure 5.10 Port Type FTU13

5.11. Type FTU14

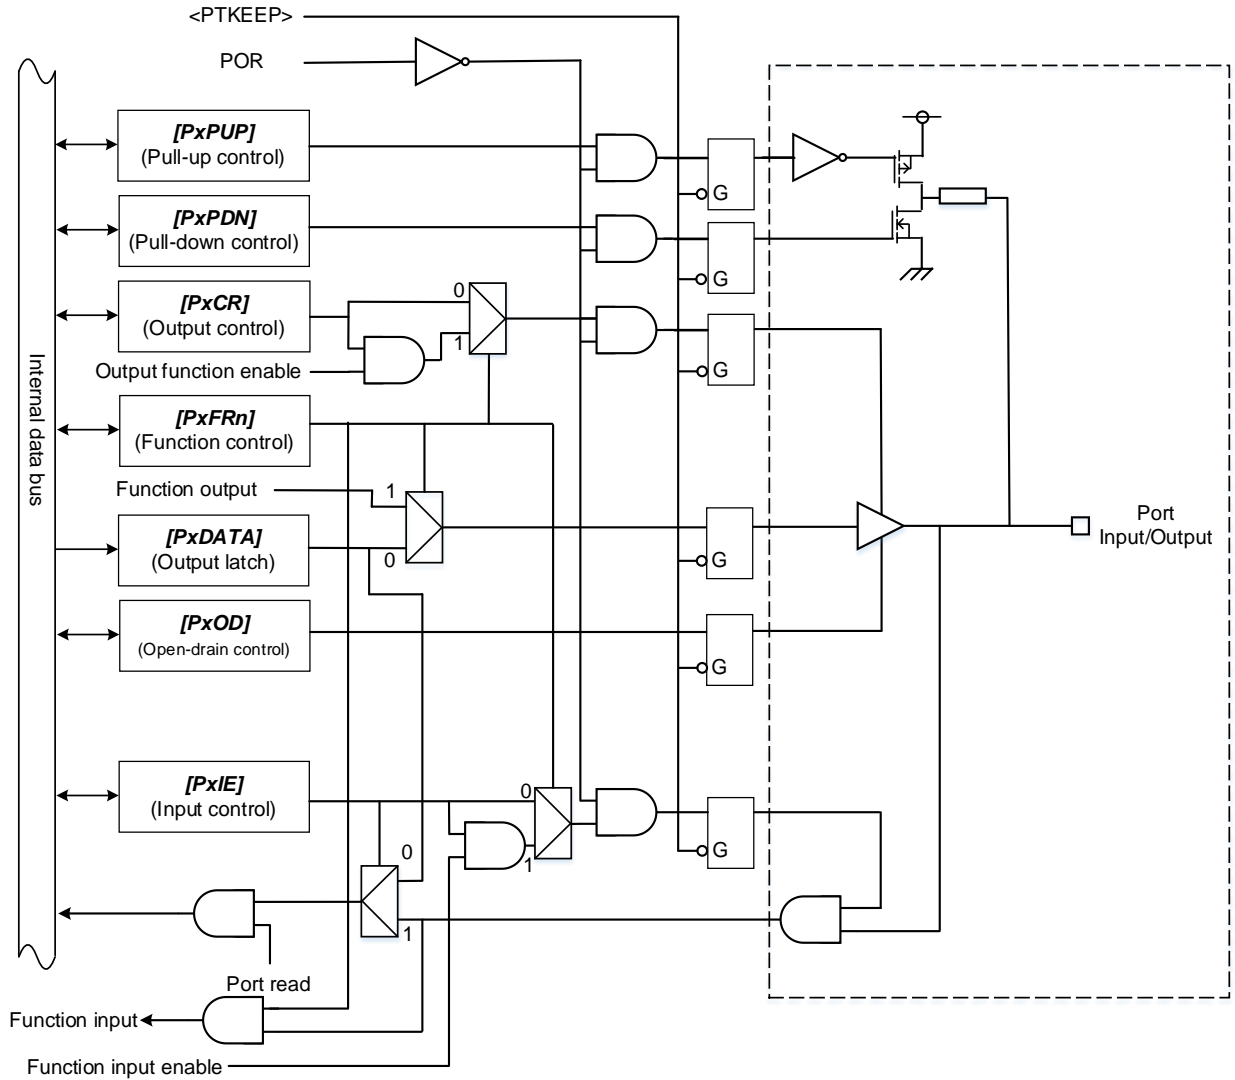


Figure 5.11 Port Type FTU14

5.12. Type FTU15

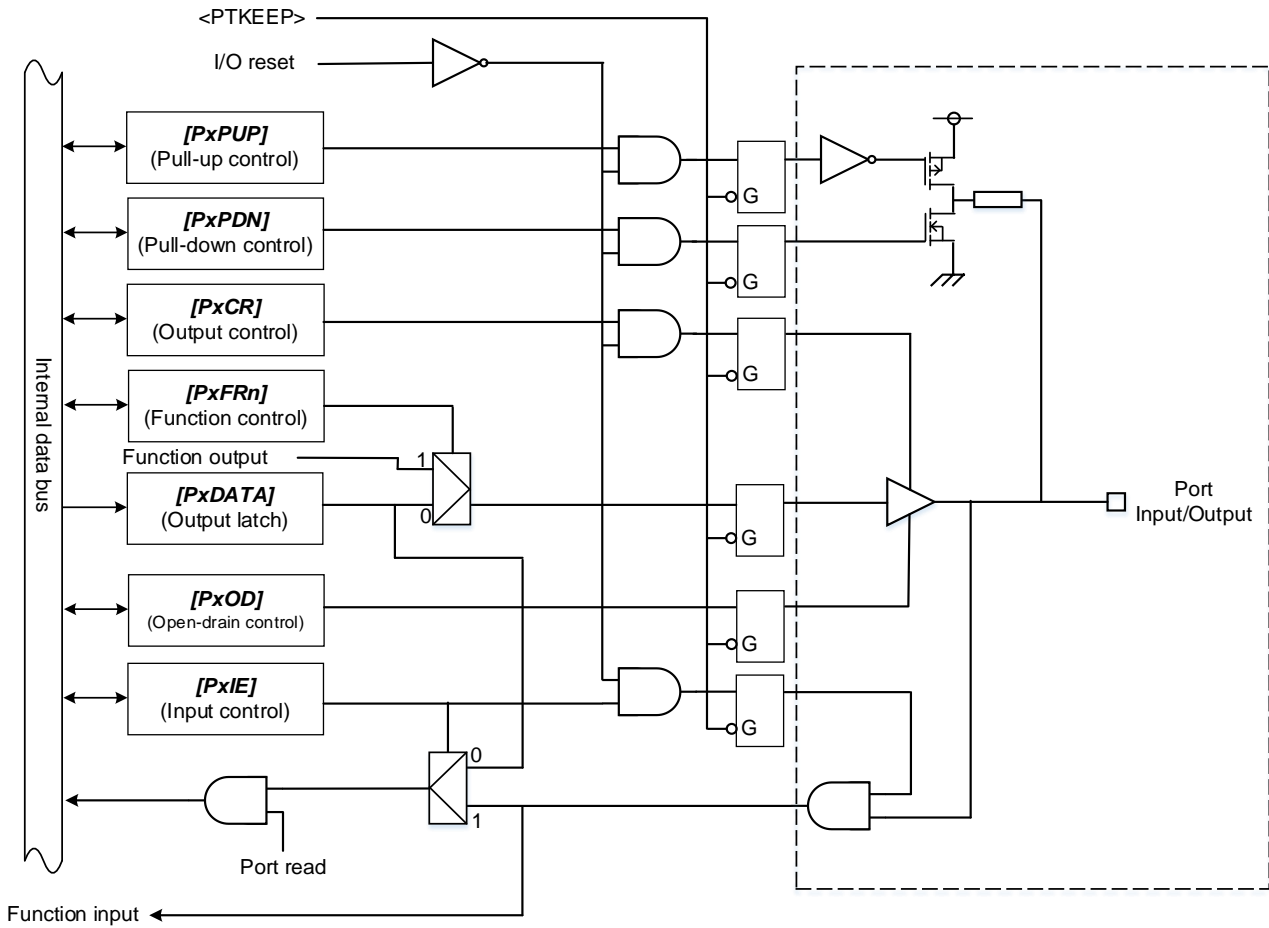


Figure 5.12 Port Type FTU15

6. Precaution

6.1. Pin Status During Reset

During the reset, the pin status is high impedance except for below pins. And the pull-up/pull-down is invalid.

- The debug interface alternate pins (PH3 to PH7) are debug pin status.
- During the reset period by the reset pin (RESET_N) or POR, the state of the BOOT_N pin can be input to PY4 with pull-up enabled and input enabled.

6.2. Unused Pins

We recommend that each unused pin should be connected to the power supply pins or GND pins via resistors.

Generally, if LSI operates while the high-impedance pins left open, electrostatic damage or latch-up may occur in the internal LSI due to induced voltage influenced from external noise.

6.3. Important Points of Using Debug Interface Pins Used as General-purpose Ports

After releasing reset, if the debug interface pins are used as the general I/O ports by the user program, the debug tool cannot be connected.

If the debug tool cannot be connected, it can recover debug connection to erase the Flash memory using UART connection set as single BOOT mode from external. For details, please refer to reference manual "Flash memory".

7. Revision History

Table 7.1 Revision History

Revision	Date	Description
1.0	2020-11-06	- First release
1.1	2024-05-31	<ul style="list-style-type: none"> - 4.2.17. PORT T Table 4.18 Port T Register Settings Note1 is added. - 4.2.17. PORT T Table 4.18 Port T Register Settings Note1 is added. - 4.2.21. PORT Y Table 4.22 Port Y Register Settings [PYIE] for EHCLKIN function is changed. Port type of PY2 and PY3 is changed. - [PYPUP] for BOOT_N function is changed. Note1 is added. A description of note2 is chaned. - 5. Block Diagrams of Ports <ul style="list-style-type: none"> Figure 5.7 in 5.7. Type FTU6 is changed. Figure 5.8 in 5.8. Type FTU10 is changed. 5.9. Type FTU10b is added. - 6.1. Pin Status During Reset Description about PY4 is changed.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**