

Application Note

ADC Monitor

Arm and Keil are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.

Table of Contents

Table of Contents.....	2
1. Preface	3
2. Technical Term	3
3. Reference Document	3
4. Target Sample Program	4
5. Configuration Diagram	4
6. Sample Program : ADC_Monitor	5
6.1. Outlines of Operation.....	5
6.2. Function to Use.....	5
6.3. Interrupt to Use	5
6.4. Configuration.....	5
6.5. Example of Terminal Emulator Output	6
6.5.1. Normal Operation	6
6.5.2. Case of Error Occurrence	6
7. ADC Driver.....	6
7.1. List of driver	6
7.2. Details	6
8. Revision History	7
RESTRICTIONS ON PRODUCT USE	8

1. Preface

This application note describes sample software for the analog-to-digital converter (ADC) monitoring function. This document helps the user check operation of a product under development and develop its program.

2. Technical Term

Term/Abbreviation	Definition
ADC	Analog-to-Digital Converter
BSP	Board Support Package
UART	Universal Asynchronous Receiver Transmitter
Timer	T32A : 32-bit Timer Event Counter


3. Reference Document

Document	Notes
Data sheet	Refer to the data sheet of MCU to be used.
Reference manual	Refer to the reference manual of each IP to be used.
Application note MCU User Guide	Refer to the MCU user manual to be used.
Driver API list	Refer to the MCU Doc folder to be used.

4. Target Sample Program

Sample Program	Outline
ADC_Monitor	Sample program of ADC monitoring function

5. Configuration Diagram

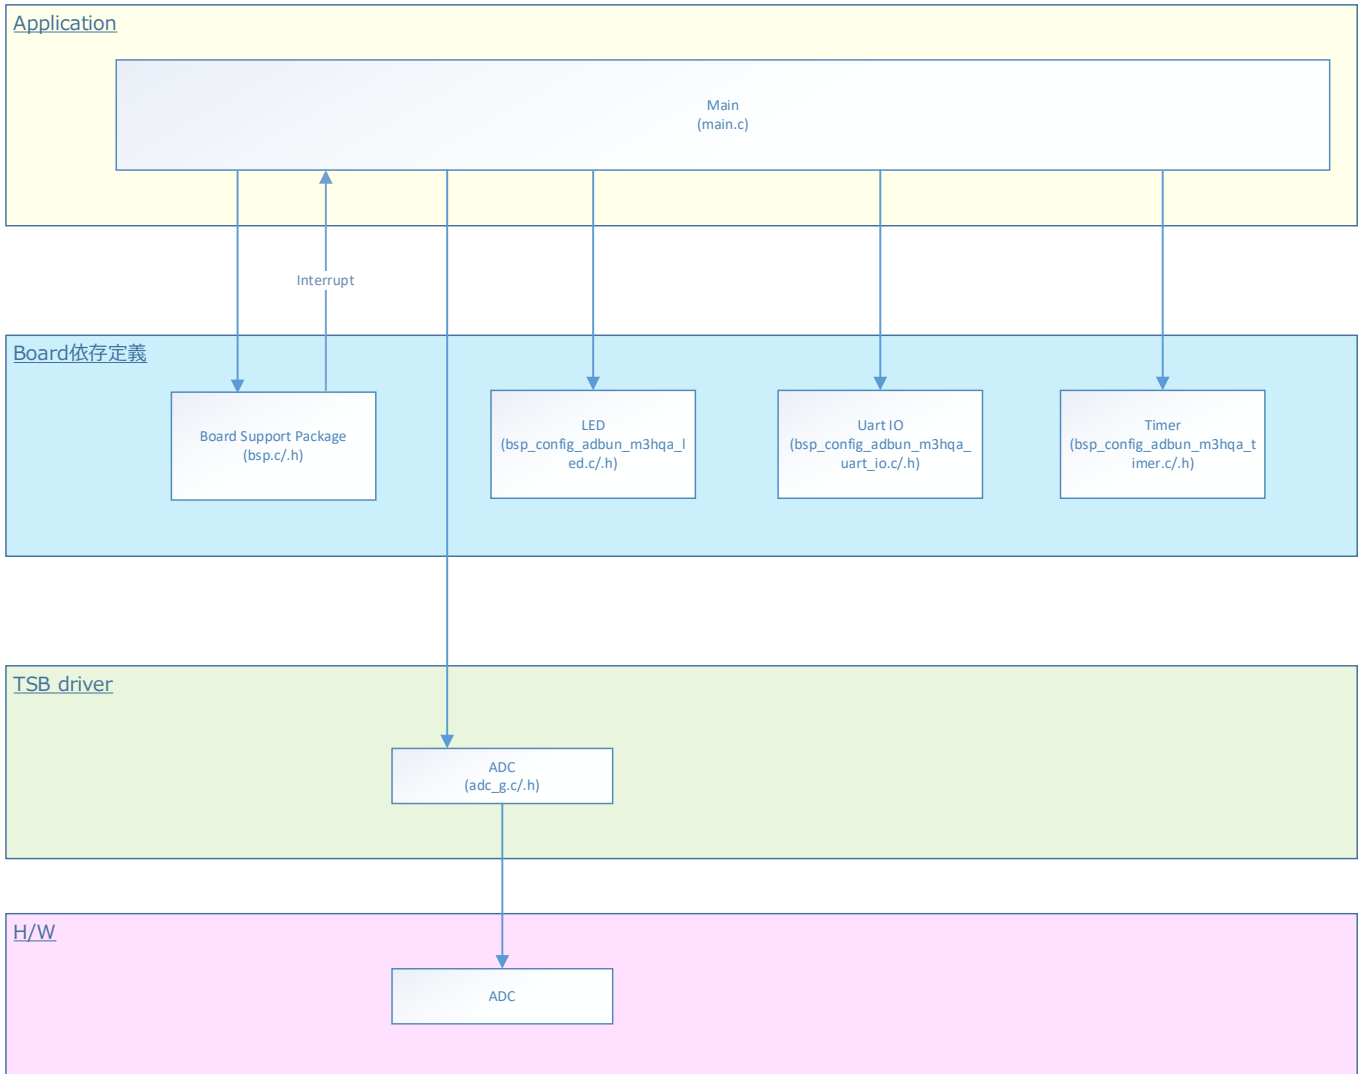

6. Sample Program : ADC_Monitor

This is sample software that changes the LED display pattern according to temperature changes using the ADC monitoring function.

6.1. Outlines of Operation

The output voltage of BSP_THERMISTOR_1 is measured by ADC and converted to temperature. If the temperature-converted value is lower than the temperature A, turn off BSP_LED_1 and BSP_LED_2. If the temperature-converted value is above temperature A and below temperature B, BSP_LED_1 is turned off and BSP_LED_2 is turned on. If the temperature-converted value is temperature B or higher, BSP_LED_1 and BSP_LED_2 light up. For the values of temperature A and B, refer to 6.4. Configuration.

6.2. Function to Use

The functions to use are as follows.
For the Port assignment of each channel, refer to the MCU user manual.

IP	Channel	Objective
ADC	BSP_THERMISTOR_1	For thermistors
PORT	BSP_LED_1	For operation check
	BSP_LED_2	For operation check
UART	BSP_UART_1	For terminal emulator communication (Outputs log)
T32A	BSP_T32A_TIMER_1	Used as a 1ms interval timer

6.3. Interrupt to Use

Interrupt	Outlines
INTUART0RX	UART ch0 Receive interrupt for terminal emulator
INTUART0TX	UART ch0 Transmission interrupt for terminal emulator
INTUART0ERR	UART ch0 Error interrupt for terminal emulator
INTT32A00A	T32A Timer A Timer counter increment every 1ms for display update
INTADACP0	ADC monitor for temperature information monitoring
INTADACP1	ADC monitor for temperature information monitoring

6.4. Configuration

“main.c” configuration setting.

Configuration	Current Value	Description
Timer A	5s	-
Temperature_A	25 degrees	-
Temperature_B	36 degrees	-

6.5. Example of Terminal Emulator Output

6.5.1. Normal Operation

Convert Result Value [THERMISTOR]:0x128(26 degrees)

6.5.2. Case of Error Occurrence

Nothing.

7. ADC Driver

7.1. List of driver

The ADC is controlled by using the following driver.
For an example of use, refer to the source code.

Driver	Control Outlines
adc_ch_init	ADC Initialization of channel object
adc_ch_deinit	ADC Release channel object
Adc_ch_int_enable	Interrupt enabled
adc_ch_int_disable	Interrupt disabled
adc_ch_get_value	Get the converted value
get_conversion_data	Get the converted value from ADxREGn
adc_dma_init	ADC DMA Object initialization
adc_dma_deinit	ADC DMA Release the object
adc_dma_start	Non-blocking Start single conversion of DMA
adc_dma_stop	Non-blocking Stop single conversion of DMA
adc_init	ADC Object initialization
adc_deinit	ADC Release the object
adc_channel_setting	ADC Channel settings
adc_channel_clear	ADC Channel clear
adc_cmp_init	ADC Initialize comparison register
adc_cmp_deinit	ADC Release comparison register
adc_channel_get_value	Get AD value
adc_start	ADC Start conversion
adc_stop	ADC Stop conversion
adc_poll_conversion	Wait for a single conversion to complete
adc_get_status	ADC Get conversion status

7.2. Details

See “3. Reference Documents” for more information.

8. Revision History

Revision	Date	Description
1.0	2022-04-08	First release

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

Toshiba Electronic Devices & Storage Corporation

<https://toshiba.semicon-storage.com/>