

Application Note

PORT

Arm and Keil are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

All other company names, product names, and service names mentioned herein may be trademarks of their respective companies.



Table of Contents

Table of Contents	2
1. Preface	3
2. Technical Term	3
3. Reference Document	3
4. Target Sample Program	4
5. Configuration Diagram	4
6. Sample Program : PORT	5
6.1. Outlines of Operation	
6.2. Function to Use	5
6.3. Interrupt to Use	5
6.4. Configuration	5
6.5. Example of Terminal Emulator Output	5
7. PORT Driver	6
7.1. List of driver	6
7.2. Details	6
8. Revision History	7
DESTRICTIONS ON PRODUCT USE	Q



1. Preface

This application note describes sample software for the general-purpose input port and general-purpose output port functions using the port driver.

This document helps the user check operation of a product under development and develop its program.

2. Technical Term

Term/Abbreviation	Definition
BSP	Board Support Package
Timer	T32A: 32-bit Timer Event Counter

3. Reference Document


Document	Notes
Data sheet	Refer to the data sheet of MCU to be used.
Reference manual	Refer to the reference manual of each IP to be used.
Application note MCU User Guide	Refer to the MCU user manual to be used.
Driver API list	Refer to the MCU Doc folder to be used.



4. Target Sample Program

Sample Program	Outline
PORT	Sample program of PORT function

5. Configuration Diagram

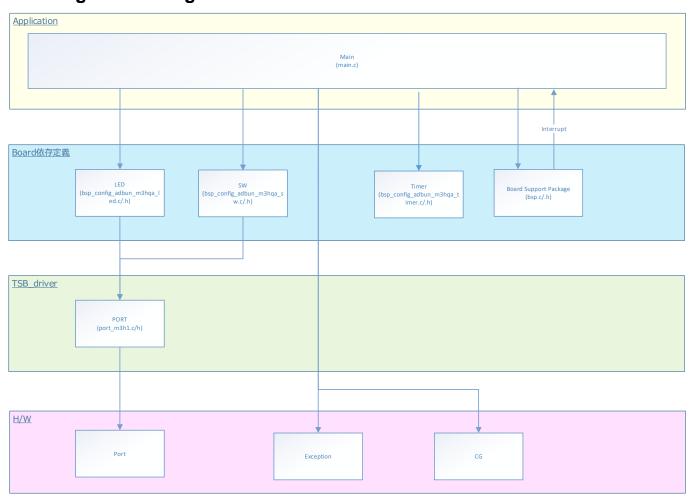



6. Sample Program: PORT

This is sample software that detects the push-switch pressing using the general-purpose input port and controls the lighting / extinguishing of the LED using the general-purpose output port.

6.1. Outlines of Operation

Pressing BSP_PSW is measured for each Timer_A, and the status is confirmed when the data becomes the same for the number of chattering times.

When the switch status is confirmed, the LED is controlled according to the pressed status. Lights the BSP_LED when BSP_PSW is pressed.

Lights the BSF_LED when BSF_FSW is pressed

The LED display is refreshed every Timer_B.

BSP LED 1 is turn on when BSP PSW 1 is pressed.

BSP LED 2 is turn on when BSP PSW 2 is pressed.

BSP_LED_3 is turn on when BSP_PSW_3 is pressed.

BSP_LED_4 is turn on when BSP_PSW_4 is pressed.

6.2. Function to Use

The functions to use are as follows.

For the Port assignment of each channel, refer to the MCU user manual.

IP	Channel	Objective
DODT/Durch Outland	BSP_PSW_1	For event triggers
	BSP_PSW_2	For event triggers
PORT(Push-Switch)	BSP_PSW_3	For event triggers
	BSP_PSW_4	For event triggers
PORT(LED)	BSP_LED_1	For operation check
	BSP_LED_2	For operation check
	BSP_LED_3	For operation check
	BSP_LED_4	For operation check
T32A Control	BSP_T32A_TIMER_1	Used as a 1ms interval timer

6.3. Interrupt to Use

Interrupt	Outlines
INTT32A00A	T32A Timer A
1111102/100/1	Timer counter increment every 1ms for SW & LED processing

6.4. Configuration

"main.c" configuration setting.

Configuration	Current Value	Description
Timer_A	10ms	Switch chattering cycle
		(* When DNF ratio is installed or not used)
Chattering Times	3 times	Chattering Times
Timer_B	10ms	LED Refresh Cycle

6.5. Example of Terminal Emulator Output

Nothing.



7. PORT Driver

7.1. List of driver

The PORT is controlled by using the following interface. For an example of use, refer to the source code.

Driver	Control Outlines
gpio_init	PORT Object initialization
gpio_deinit	PORT Release the object
gpio_write_mode	Port mode write
gpio_read_mode	Port mode read
gpio_func	Port function switching
gpio_SetPullUp	Set pull-up mode
gpio_SetPullDown	Set pull-down mode
gpio_SetOpenDrain	Set open drain
gpio_write_bit	Port bit write
gpio_read_bit	Port bit read

7.2. Details

See "3. Reference Documents" for more information.



8. Revision History

Revision	Date	Description
1.0	2022-04-08	First release



RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.
- PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE
 EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY
 CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT
 ("UNINTENDED USE"). Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation,
 equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment,
 equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or
 explosions, safety devices, elevators and escalators, and devices related to power plant. IF YOU USE PRODUCT FOR UNINTENDED USE,
 TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT. For details, please contact your TOSHIBA sales representative or contact us via our
 website
- · Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any
 applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR
 PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER,
 INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING
 WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2)
 DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR
 INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE,
 ACCURACY OF INFORMATION. OR NONINFRINGEMENT.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for
 the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass
 destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations
 including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export
 and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and
 regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please
 use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including
 without limitation, the EU RoHS Directive. TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT
 OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.

Toshiba Electronic Devices & Storage Corporation

https://toshiba.semicon-storage.com/